



SGM8605-1

1.2mA, 12.5MHz, Rail-to-Rail I/O CMOS Operational Amplifier

GENERAL DESCRIPTION

The SGM8605-1 (single with shutdown) is a low noise, low voltage, and low power operational amplifier, that can be designed into a wide range of applications. The SGM8605-1 has a high gain-bandwidth product of 12.5MHz, a slew rate of 8.5V/ μ s, and a quiescent current of 1.2mA at 5V. The SGM8605-1 has a power-down disable feature that reduces the supply current to less than 1 μ A.

The SGM8605-1 is designed to provide optimal performance in low voltage and low noise systems. It provides rail-to-rail output swing into heavy loads. The input common mode voltage range includes ground, and the maximum input offset voltage is 4.5mV for SGM8605-1. The operating supply range is from 2.1V to 5.5V.

SGM8605-1 is available in Green UTDFN-1.45 \times 1-6L package. It is specified over the extended industrial temperature range (-40°C to +125°C).

FEATURES

- Rail-to-Rail Input and Output
- Input Offset Voltage: 0.9mV (TYP)
- High Gain-Bandwidth Product: 12.5MHz
- High Slew Rate: 8.5V/ μ s
- Settling Time to 0.1% with 2V Step: 0.21 μ s
- Overload Recovery Time: 0.6 μ s
- Supply Voltage Range: 2.1V to 5.5V
- Input Common Mode Voltage Range:
-0.1V to +5.6V with $V_S = 5.5V$
- Low Power
1.2mA Typical Supply Current
- -40°C to +125°C Operating Temperature Range
- Available in Green UTDFN-1.45 \times 1-6L Package

APPLICATIONS

Sensors
Audio
Active Filters
A/D Converters
Communications
Test Equipment
Cellular and Cordless Phones
Laptops and PDAs
Photodiode Amplification
Battery-Powered Instrumentation

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8605-1	UTDFN-1.45×1-6L	-40°C to +125°C	SGM8605-1XUDL6G/TR	78X	Tape and Reel, 5000

NOTE: X = Date Code.

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, +V_S to -V_S6V
 Input Common Mode Voltage Range.....
 (-V_S) - 0.3V to (+V_S) + 0.3V
 Storage Temperature Range-65°C to +150°C
 Junction Temperature.....+150°C
 Lead Temperature (Soldering 10sec).....+260°C
 ESD Susceptibility
 HBM..... 8000V
 MM..... 400V
 CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range2.1V to 5.5V
 Operating Temperature Range-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed may cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational section of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time.

PIN CONFIGURATION

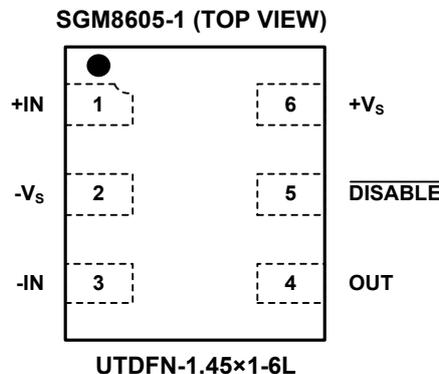

ELECTRICAL CHARACTERISTICS(At $V_S = +5V$, $T_A = +25^\circ C$, $V_{CM} = +V_S/2$, $R_L = 600\Omega$, unless otherwise noted.)







PARAMETER	CONDITIONS	SGM8605-1				
		TYP	MIN/MAX OVER TEMPERATURE			
		+25°C	+25°C	-40°C to 125°C	UNITS	MIN/MAX
INPUT CHARACTERISTICS						
Input Offset Voltage (V_{OS})		0.9	4.5	4.8	mV	MAX
Input Bias Current (I_B)		2			pA	TYP
Input Offset Current (I_{OS})		3			pA	TYP
Input Common Mode Voltage Range (V_{CM})	$V_S = 5.5V$	-0.1 to +5.6			V	TYP
Common Mode Rejection Ratio (CMRR)	$V_S = 5.5V$, $V_{CM} = -0.1V$ to $4V$	79	68	65	dB	MIN
	$V_S = 5.5V$, $V_{CM} = -0.1V$ to $5.6V$	75	60	58	dB	MIN
Open-Loop Voltage Gain (A_{OL})	$R_L = 600\Omega$, $V_O = 0.15V$ to $4.85V$	88	80	67	dB	MIN
	$R_L = 10k\Omega$, $V_O = 0.05V$ to $4.95V$	100	96	75	dB	MIN
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$)		2			$\mu V/^\circ C$	TYP
OUTPUT CHARACTERISTICS						
Output Voltage Swing from Rail	$R_L = 600\Omega$	74	96	123	mV	TYP
	$R_L = 10k\Omega$	6	13	19	mV	TYP
Output Current (I_{OUT})		78	59	50	mA	MIN
Closed-Loop Output Impedance	$f = 1MHz$, $G = +1$	8.5			Ω	TYP
POWER-DOWN DISABLE						
Turn-On Time		1			μs	TYP
Turn-Off Time		0.2			μs	TYP
$\overline{DISABLE}$ Voltage-Off			0.8		V	MAX
$\overline{DISABLE}$ Voltage-On			2		V	MIN
POWER SUPPLY						
Operating Voltage Range			2.1	2.1	V	MIN
			5.5	5.5	V	MAX
Power Supply Rejection Ratio (PSRR)	$V_S = +2.1V$ to $+5.5V$, $V_{CM} = (-V_S) + 0.5V$	75	67	61	dB	MIN
Quiescent Current (I_Q)	$I_{OUT} = 0$	1.2	1.5	1.9	mA	MAX
Supply Current when Disabled		0.5	8	10	μA	MAX
DYNAMIC PERFORMANCE						
Gain-Bandwidth Product (GBP)	$R_L = 600\Omega$	12.5			MHz	TYP
Phase Margin (ϕ_o)		65			degrees	TYP
Slew Rate (SR)	$G = +1$, 2V output step	8.5			V/ μs	TYP
Settling Time to 0.1% (t_s)	$G = +1$, 2V output step	0.21			μs	TYP
Overload Recovery Time	$V_{IN} \times Gain = V_S$	0.6			μs	TYP
NOISE PERFORMANCE						
Voltage Noise Density (e_n)	$f = 1kHz$	12			nV/\sqrt{Hz}	TYP
	$f = 10kHz$	8			nV/\sqrt{Hz}	TYP

ELECTRICAL CHARACTERISTICS(At $V_S = +2.1V$, $T_A = +25^\circ C$, $V_{CM} = +V_S/2$, $R_L = 600\Omega$, unless otherwise noted.)

PARAMETER	CONDITIONS	SGM8605-1					
		TYP	MIN/MAX OVER TEMPERATURE			UNITS	MIN/MAX
		+25°C	+25°C	-40°C to 125°C			
INPUT CHARACTERISTICS							
Input Offset Voltage (V_{OS})		0.8	4.7	4.9	mV	MAX	
Input Bias Current (I_B)		2			pA	TYP	
Input Offset Current (I_{OS})		3			pA	TYP	
Input Common Mode Voltage Range (V_{CM})	$V_S = 2.1V$	-0.1 to +2.2			V	TYP	
Common Mode Rejection Ratio (CMRR)	$V_S = 2.1V$, $V_{CM} = -0.1V$ to $0.6V$	70	60	50	dB	MIN	
	$V_S = 2.1V$, $V_{CM} = -0.1V$ to $2.2V$	70	54	49	dB	MIN	
Open-Loop Voltage Gain (A_{OL})	$R_L = 600\Omega$, $V_O = 0.15V$ to $1.95V$	87	81	64	dB	MIN	
	$R_L = 10k\Omega$, $V_O = 0.05V$ to $2.05V$	97	90	72	dB	MIN	
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$)		2			$\mu V/^\circ C$	TYP	
OUTPUT CHARACTERISTICS							
Output Voltage Swing from Rail	$R_L = 600\Omega$	38	58	70	mV	TYP	
	$R_L = 10k\Omega$	5	9	11	mV	TYP	
Output Current (I_{OUT})		28	20	15	mA	MIN	
POWER-DOWN DISABLE							
Turn-On Time		7.4			μs	TYP	
Turn-Off Time		0.4			μs	TYP	
$\overline{DISABLE}$ Voltage-Off			0.4		V	MAX	
$\overline{DISABLE}$ Voltage-On			1.8		V	MIN	
POWER SUPPLY							
Quiescent Current (I_Q)	$I_{OUT} = 0$	1.3	1.55	1.9	mA	MAX	
Supply Current when Disabled		0.5	4	6	μA	MAX	
DYNAMIC PERFORMANCE							
Gain-Bandwidth Product (GBP)	$R_L = 600\Omega$	12.5			MHz	TYP	
Phase Margin (ϕ_O)		60			degrees	TYP	
Slew Rate (SR)	$G = +1$, 1V output step	8.9			V/ μs	TYP	
Settling Time to 0.1% (t_S)	$G = +1$, 1V output step	0.24			μs	TYP	
Overload Recovery Time	$V_{IN} \times Gain = V_S$	0.53			μs	TYP	
NOISE PERFORMANCE							
Voltage Noise Density (e_n)	$f = 1kHz$	12.5			nV/\sqrt{Hz}	TYP	
	$f = 10kHz$	9			nV/\sqrt{Hz}	TYP	







TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

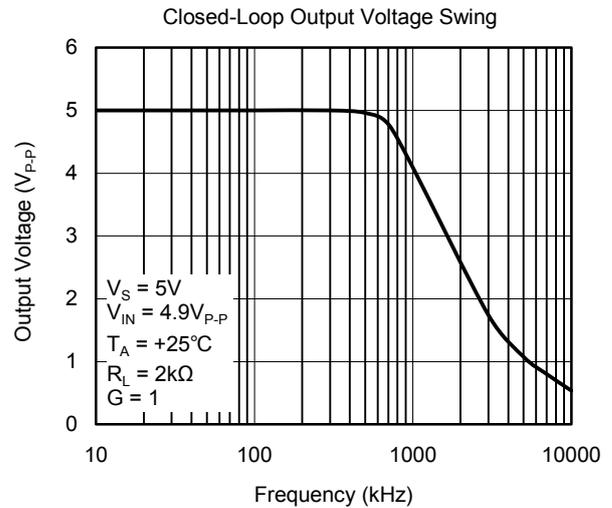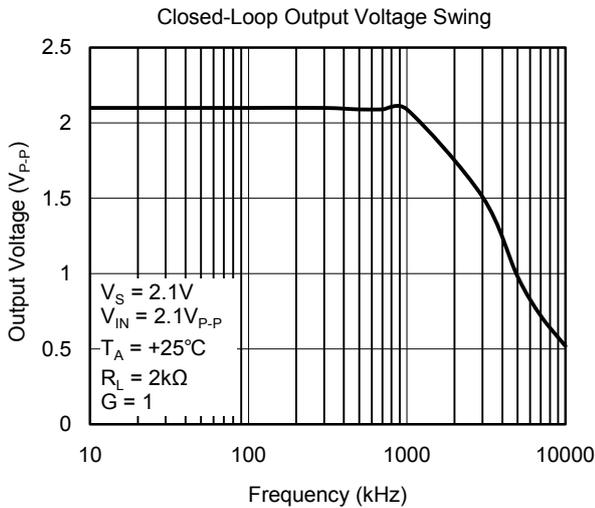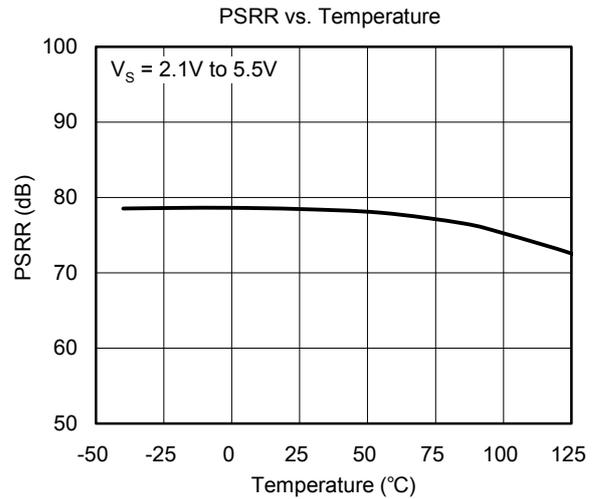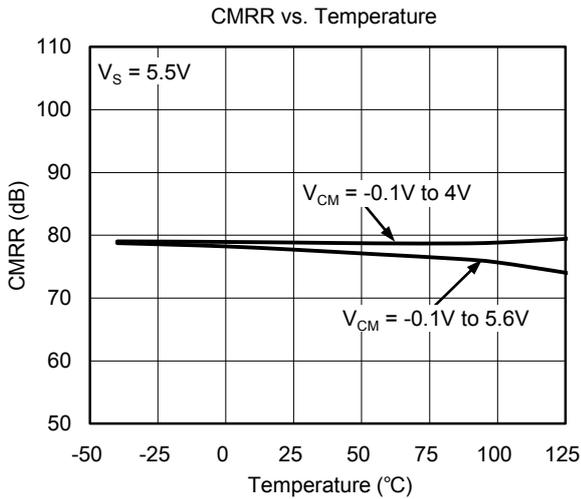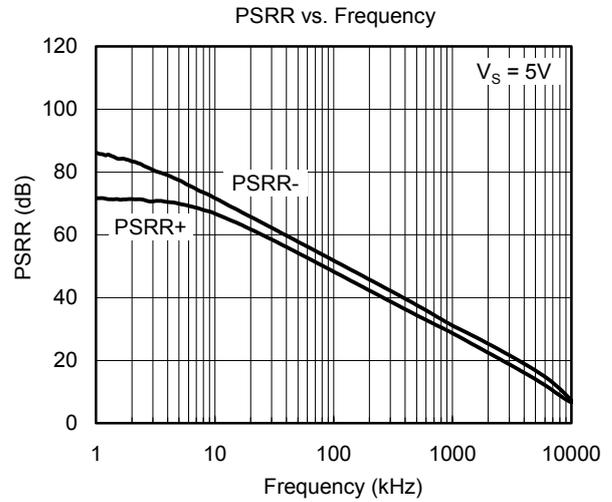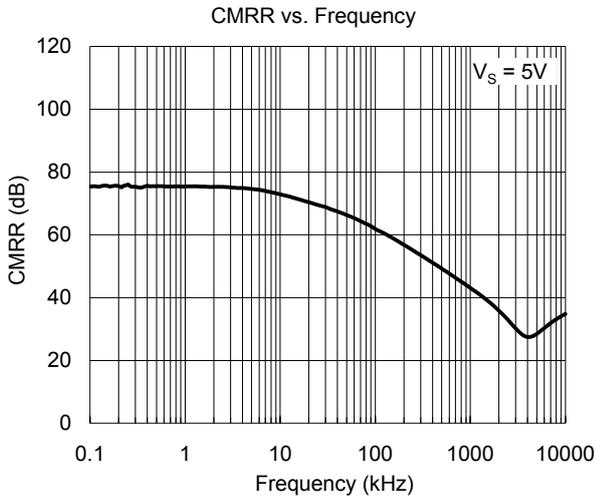

TYPICAL PERFORMANCE CHARACTERISTICS


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

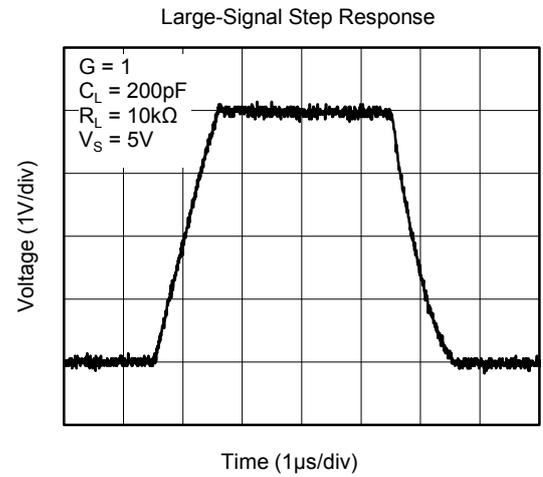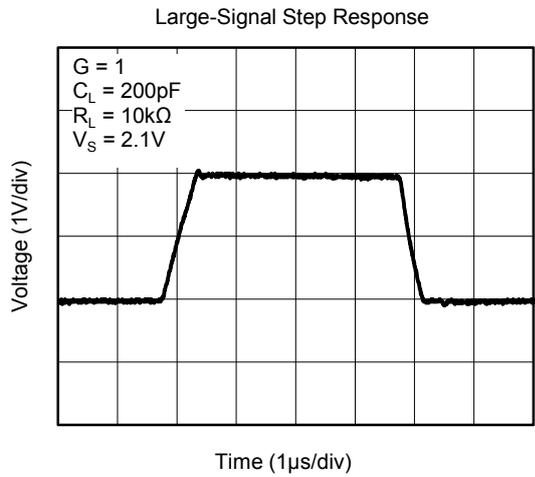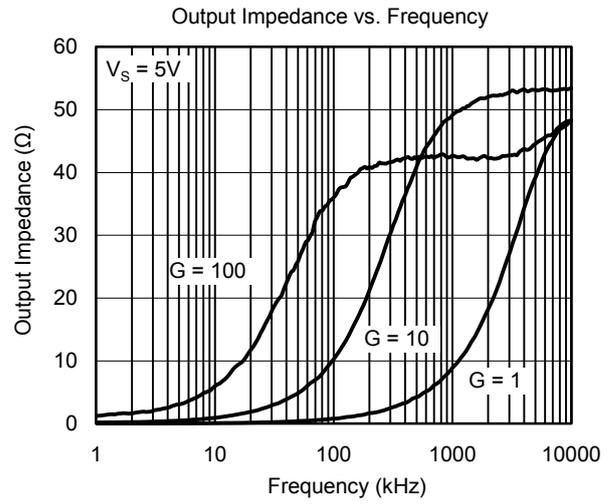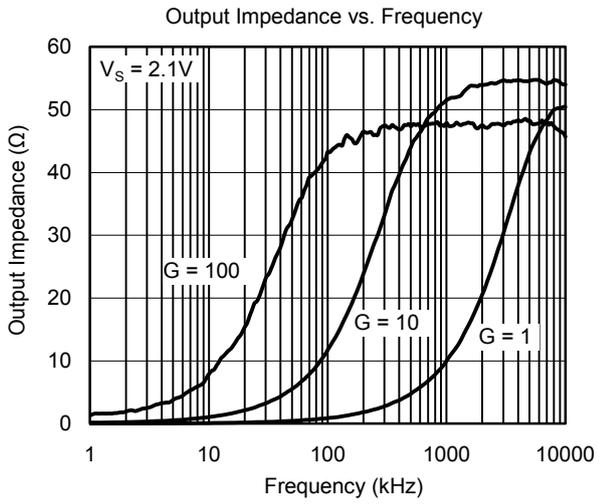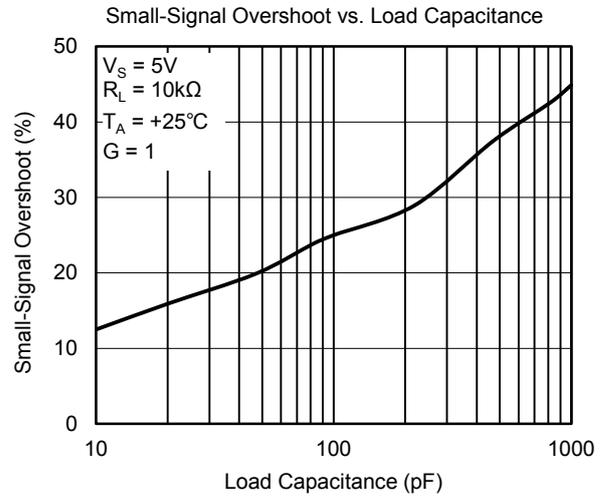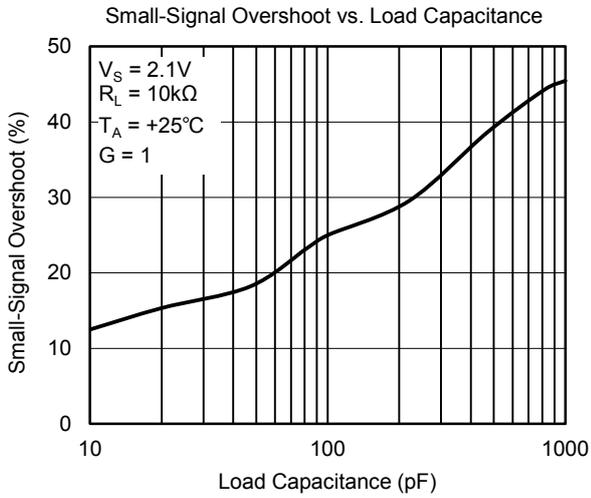

TYPICAL PERFORMANCE CHARACTERISTICS


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

Small-Signal Step Response

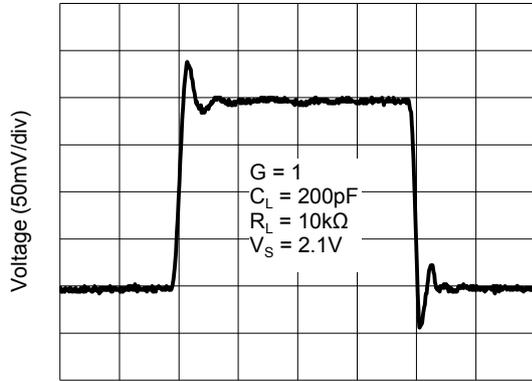


Time (200ns/div)

Small-Signal Step Response

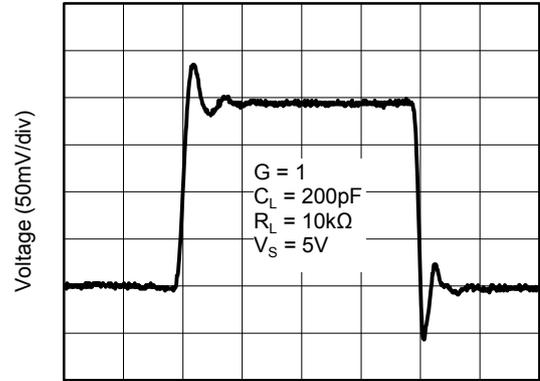


Time (200ns/div)

Positive Overload Recovery

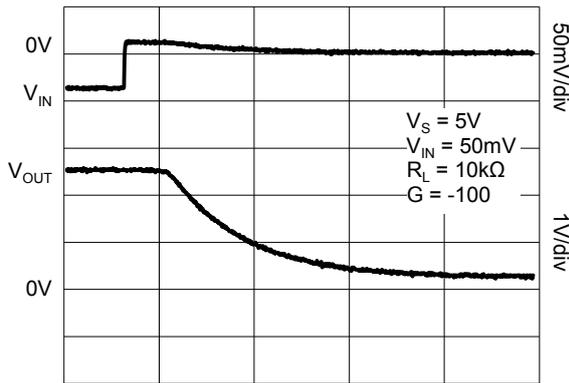


Time (1 μs /div)

Negative Overload Recovery

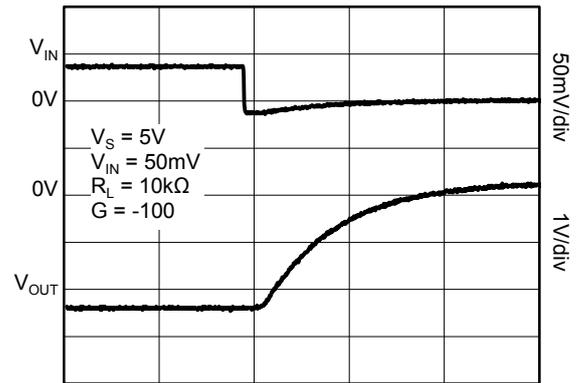


Time (1 μs /div)

Supply Current vs. Temperature






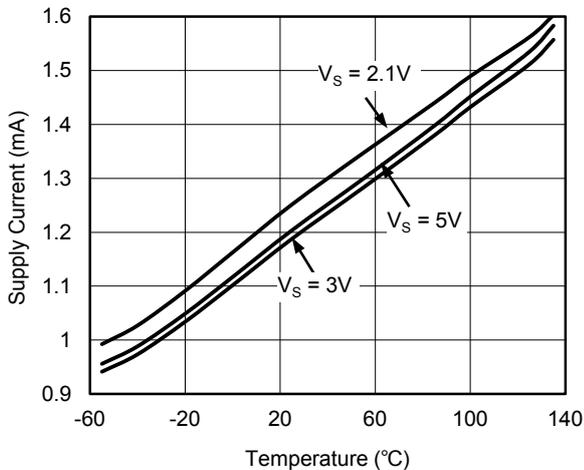


Shutdown Current vs. Temperature

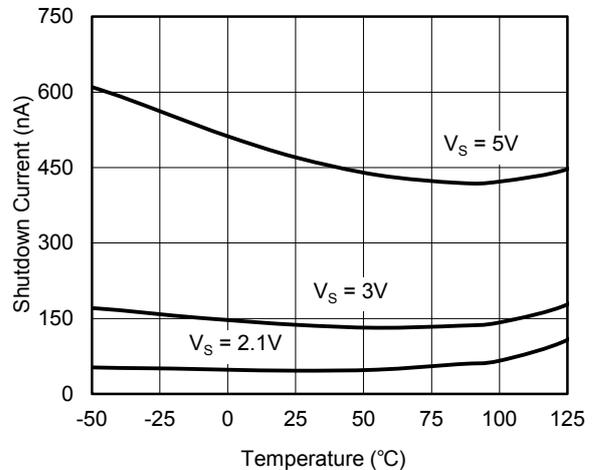

TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

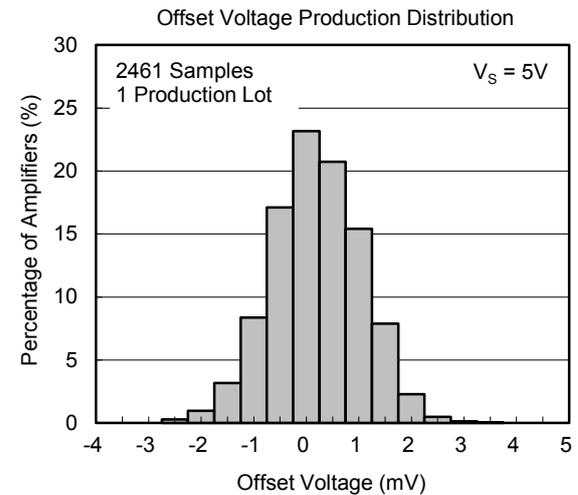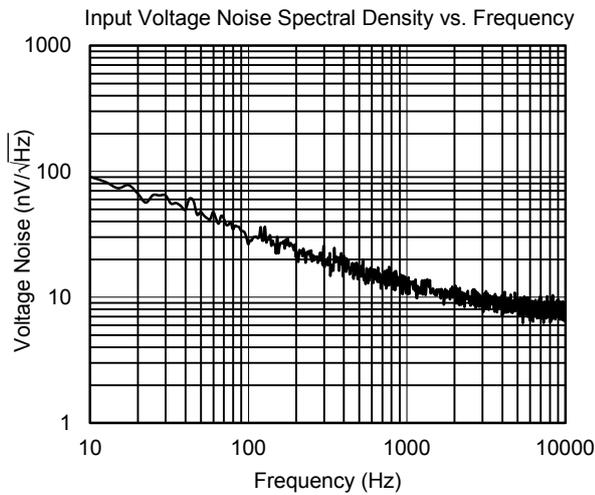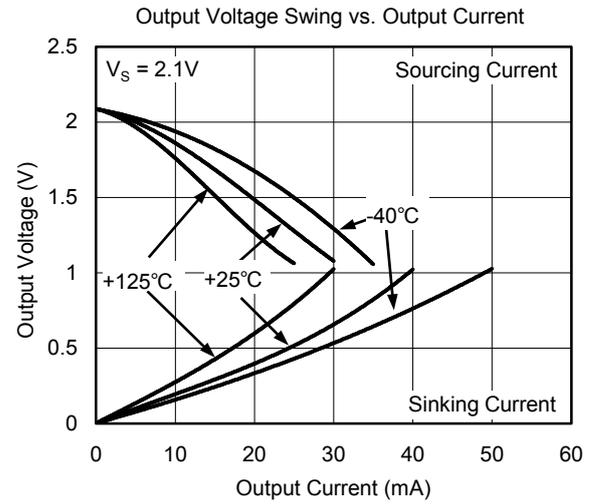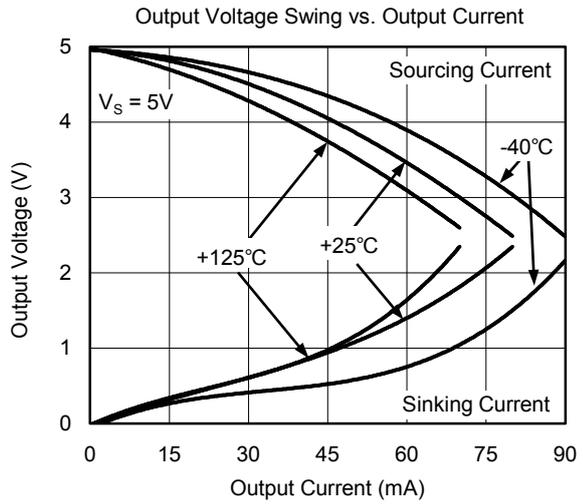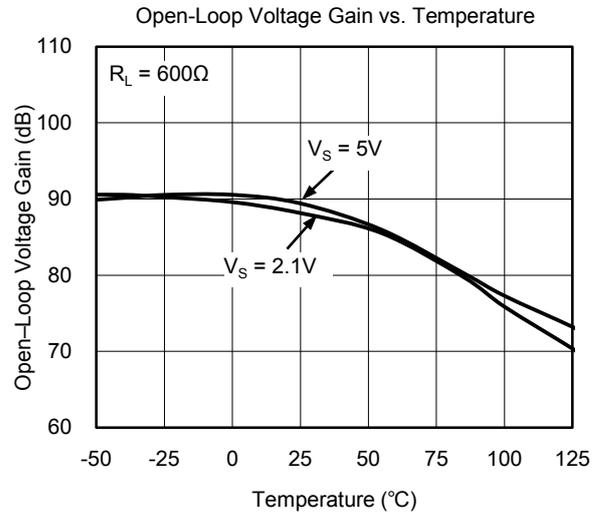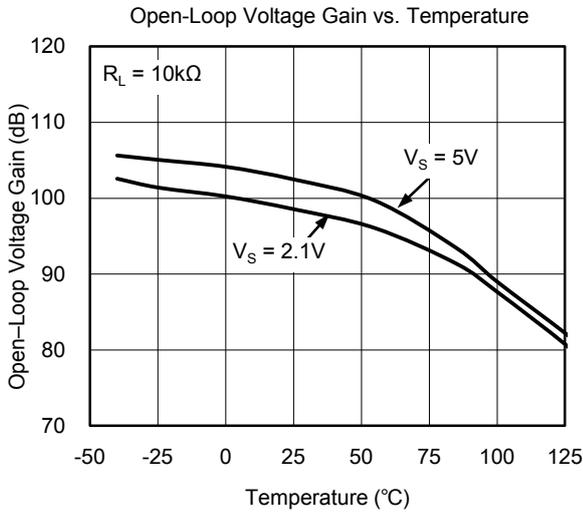

APPLICATION INFORMATION

Driving Capacitive Loads

The SGM8605-1 can directly drive 4700pF in unity-gain without oscillation. The unity-gain follower (buffer) is the most sensitive configuration to capacitive loading. Direct capacitive loading reduces the phase margin of amplifiers and this results in ringing or even oscillation. Applications that require greater capacitive drive capability should use an isolation resistor between the output and the capacitive load like the circuit in Figure 1. The isolation resistor R_{ISO} and the load capacitor C_L form a zero to increase stability. The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. Note that this method results in a loss of gain accuracy because R_{ISO} forms a voltage divider with the R_{LOAD} .

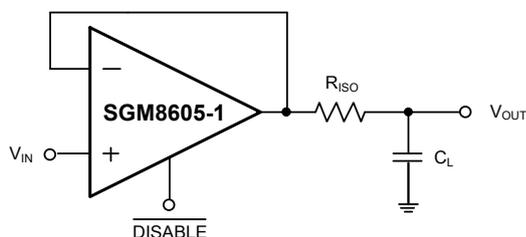


Figure 1. Indirectly Driving Heavy Capacitive Load

An improved circuit is shown in Figure 2. It provides DC accuracy as well as AC stability. R_F provides the DC accuracy by connecting the inverting input with the output. C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving phase margin in the overall feedback loop.

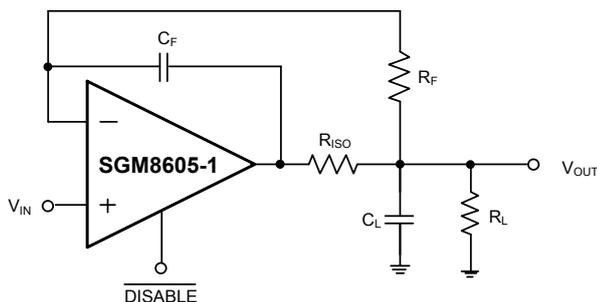


Figure 2. Indirectly Driving Heavy Capacitive Load with DC Accuracy

For non-buffer configuration, there are two other ways to increase the phase margin: (a) by increasing the amplifier's closed-loop gain or (b) by placing a capacitor in parallel with the feedback resistor to counteract the parasitic capacitance associated with inverting node.

Power-Supply Bypassing and Layout

The SGM8605-1 operates from either a single +2.1V to +5.5V supply or dual $\pm 1.05V$ to $\pm 2.75V$ supplies. For single-supply operation, bypass the power supply $+V_S$ with a 0.1 μF ceramic capacitor which should be placed close to the $+V_S$ pin. For dual-supply operation, both the $+V_S$ and the $-V_S$ supplies should be bypassed to ground with separate 0.1 μF ceramic capacitors. 2.2 μF tantalum capacitor can be added for better performance.

Good PC board layout techniques optimize performance by decreasing the amount of stray capacitance at the op amp's inputs and output. To decrease stray capacitance, minimize trace lengths and widths by placing external components as close to the device as possible. Use surface-mount components whenever possible.

For the operational amplifier, soldering the part to the board directly is strongly recommended. Try to keep the high frequency current loop area small to minimize the EMI (electromagnetic interfacing).

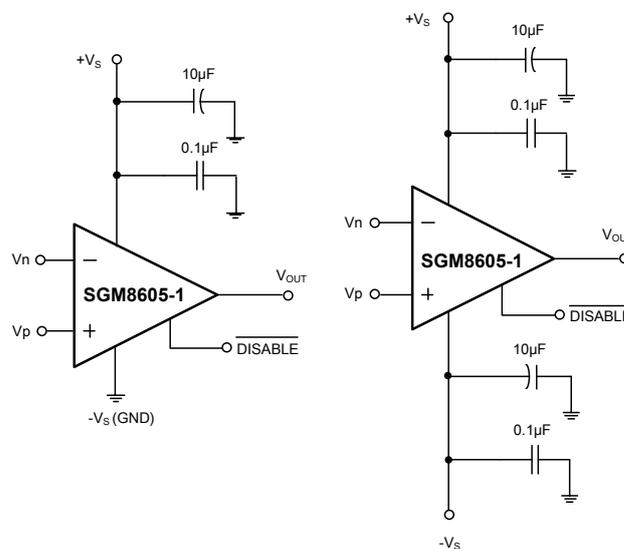


Figure 3. Amplifier with Bypass Capacitors

Grounding

A ground plane layer is important for SGM8605-1 circuit design. The length of the current path in an inductive ground return will create an unwanted voltage noise. Broad ground plane areas will reduce the parasitic inductance.

SGM8605-1

APPLICATION INFORMATION

Input-to-Output Coupling

To minimize capacitive coupling, the input and output signal traces should not be in parallel. This helps reduce unwanted positive feedback.

Differential Amplifier

The circuit shown in Figure 4 performs the difference function. If the resistor ratios are equal ($R_4/R_3 = R_2/R_1$), then $V_{OUT} = (V_P - V_n) \times R_2/R_1 + V_{REF}$.

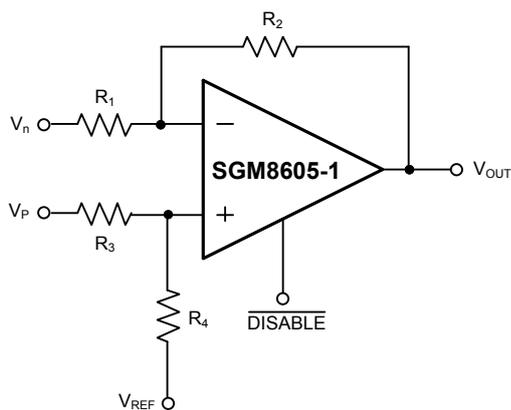


Figure 4. Differential Amplifier

Instrumentation Amplifier

The circuit in Figure 5 performs the same function as that in Figure 4 but with the high input impedance.

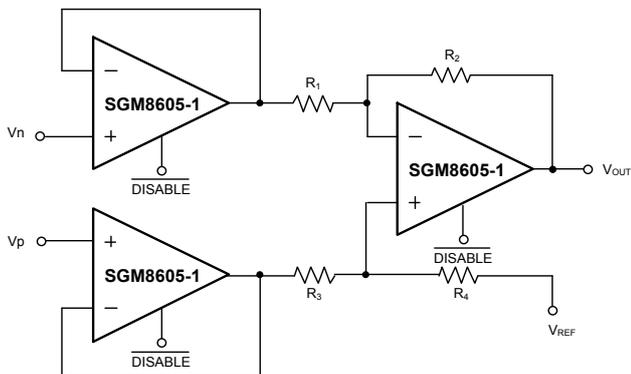


Figure 5. Instrumentation Amplifier

Low-Pass Active Filter

The low-pass filter shown in Figure 6 has a DC gain of $(-R_2/R_1)$ and the -3dB corner frequency is $1/2\pi R_2 C$. Make sure the filter bandwidth is within the bandwidth of the amplifier. The large values of feedback resistors can couple with parasitic capacitance and cause undesired effects such as ringing or oscillation in high-speed amplifiers. Keep resistor values as low as possible and consistent with output loading consideration.


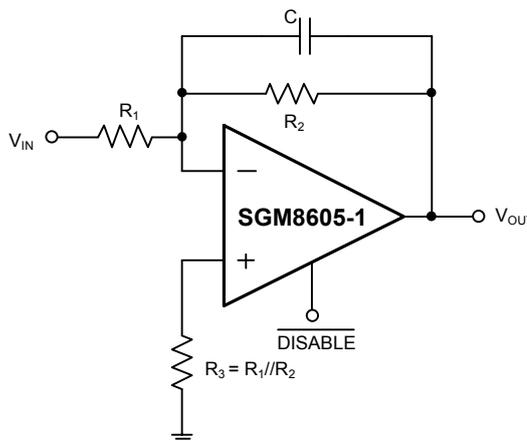



Figure 6. Low-Pass Active Filter

PACKAGE OUTLINE DIMENSIONS


UTDFN-1.45×1-6L

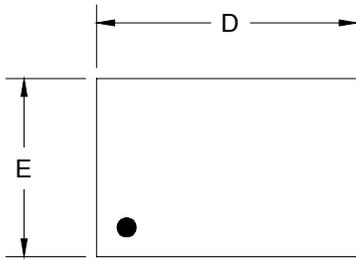


TOP VIEW

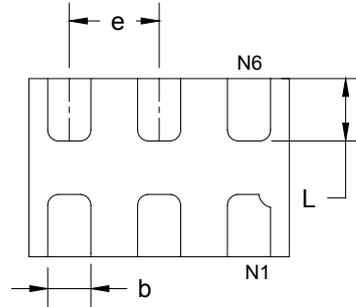

BOTTOM VIEW

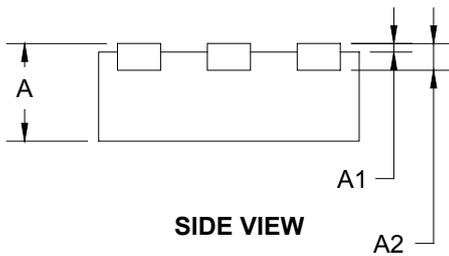

SIDE VIEW

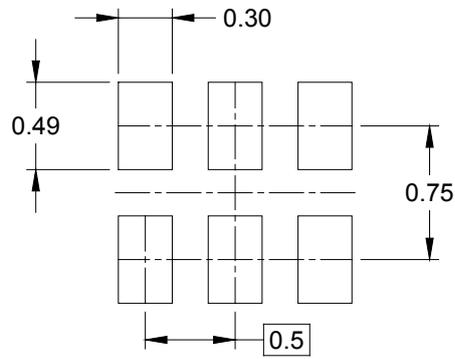


RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.450	0.550	0.018	0.022
A1	0.000	0.050	0.000	0.002
A2	0.150 REF		0.006 REF	
D	1.374	1.526	0.054	0.060
E	0.924	1.076	0.036	0.042
b	0.180	0.300	0.007	0.012
e	0.500 TYP		0.020 TYP	
L	0.274	0.426	0.011	0.017

TAPE AND REEL INFORMATION

REEL DIMENSIONS

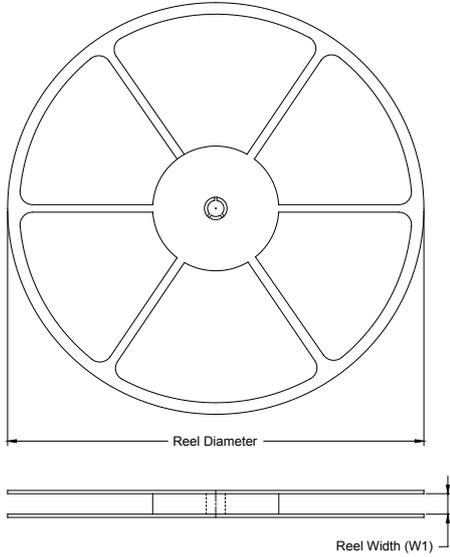

TAPE DIMENSIONS

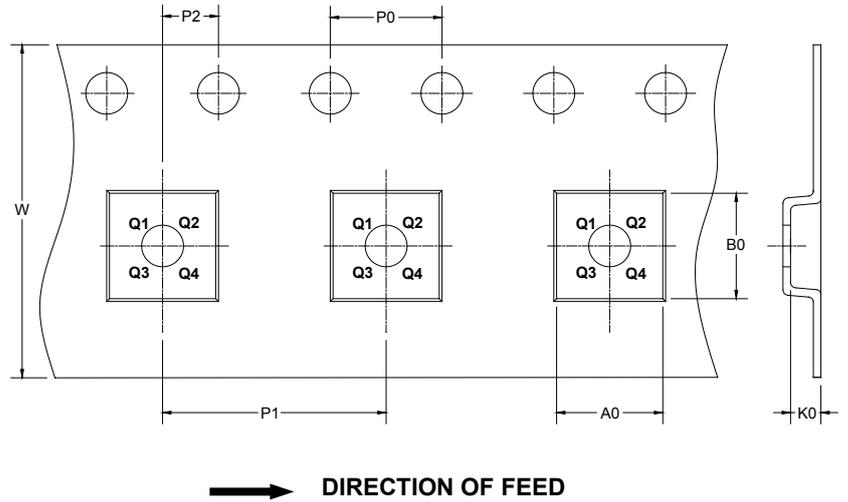

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1.45×1-6L	7"	9.5	1.15	1.6	0.75	4.00	4.00	2.00	8.00	Q1

000001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

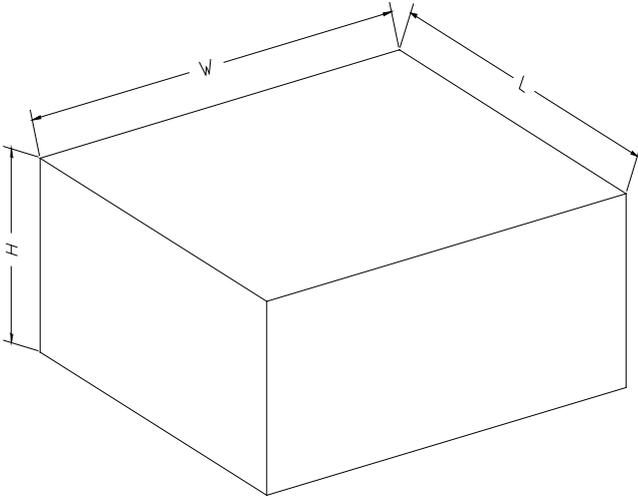

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002