



SGM2013

300mA, Low Power, Low Dropout, 3-Terminal, Linear Regulators


GENERAL DESCRIPTION

The SGM2013 series low-power, low-noise, low-dropout, CMOS linear voltage regulators operate from a 2.5V to 5.5V input voltage. They are the perfect choice for low voltage, low power applications. A low ground current makes this part attractive for battery operated power systems. The SGM2013 series also offer low dropout voltage to prolong battery life in portable electronics.

The SGM2013 features include output current limit and thermal shutdown protection.

SGM2013 operates over an ambient temperature range of -40°C to +125°C. It comes in Green SOT-89-3 package.

TYPICAL OPERATION CIRCUIT

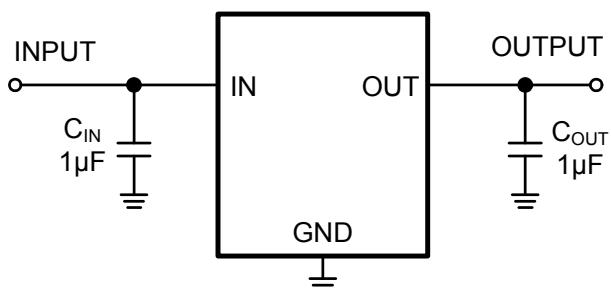

FEATURES

- Low Output Noise
- Low Dropout Voltage
- Maximum Output Current: 300mA
- Thermal-Overload Protection
- Output Current Limit
- Available Fixed Output Voltages: 1.2V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V and 3.3V
- Available in Green SOT-89-3 Package

APPLICATIONS

Cellular Telephones
Digital Cameras
MP3, MP4
USB 2.0
Modems
PC Cameras
Hand-Held Instruments
Electronic Dictionaries
Portable/Battery-Powered Equipment



PACKAGE/ORDERING INFORMATION

| MODEL | V _{OUT} (V) | PIN- PACKAGE | ORDERING NUMBER | PACKAGE MARKING | PACKAGE OPTION |
|-------------|-------------------------|-------------------|--------------------|--------------------|---------------------|
| SGM2013-1.2 | 1.2V | SOT-89-3 | SGM2013-1.2XK3/TR | SGM2013-1.2XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-1.2XK3L/TR | SGM2013-1.2XK3L | Tape and Reel, 1000 |
| SGM2013-1.5 | 1.5V | SOT-89-3 | SGM2013-1.5XK3/TR | SGM2013-1.8XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-1.5XK3L/TR | SGM2013-1.8XK3L | Tape and Reel, 1000 |
| SGM2013-1.8 | 1.8V | SOT-89-3 | SGM2013-1.8XK3/TR | SGM2013-1.8XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-1.8XK3L/TR | SGM2013-1.8XK3L | Tape and Reel, 1000 |
| SGM2013-2.5 | 2.5V | SOT-89-3 | SGM2013-2.5XK3/TR | SGM2013-2.5XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-2.5XK3L/TR | SGM2013-2.5XK3L | Tape and Reel, 1000 |
| SGM2013-2.8 | 2.8V | SOT-89-3 | SGM2013-2.8XK3/TR | SGM2013-2.8XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-2.8XK3L/TR | SGM2013-2.8XK3L | Tape and Reel, 1000 |
| SGM2013-3.0 | 3.0V | SOT-89-3 | SGM2013-3.0XK3/TR | SGM2013-3.0XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-3.0XK3L/TR | SGM2013-3.0XK3L | Tape and Reel, 1000 |
| SGM2013-3.3 | 3.3V | SOT-89-3 | SGM2013-3.3XK3/TR | SGM2013-3.3XK3 | Tape and Reel, 1000 |
| | | SOT-89-3 (L-Type) | SGM2013-3.3XK3L/TR | SGM2013-3.3XK3L | Tape and Reel, 1000 |

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-----------------------------|
| IN to GND..... | -0.3V to 6V |
| Output Short-Circuit Duration..... | Infinite |
| OUT to GND..... | -0.3V to (V_{IN} + 0.3V) |
| Power Dissipation, P_D @ $T_A = 25^\circ\text{C}$ | |
| SOT-89-3 | 0.571W |
| Package Thermal Resistance | |
| SOT-89-3, θ_{JA} | 175°C/W |
| Operating Temperature Range..... | -40°C to +125°C |
| Junction Temperature..... | 150°C |
| Storage Temperature Range..... | -65°C to +150°C |
| Lead Temperature (Soldering, 10s)..... | 260°C |
| ESD Susceptibility | |
| HBM..... | 4000V |
| MM..... | 400V |



NOTE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.

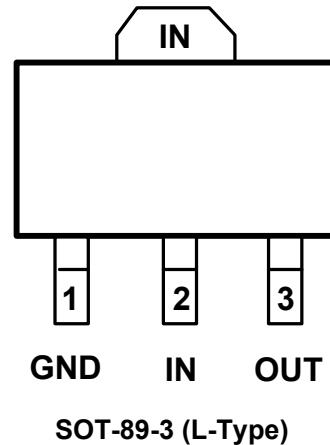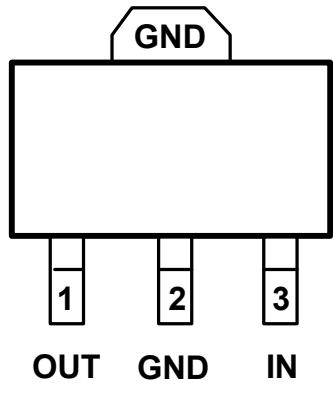PIN CONFIGURATIONS (TOP VIEW)**PIN DESCRIPTION**

| NAME | FUNCTION |
|------|--|
| IN | Regulator Input. Supply voltage can range from 2.5V to 5.5V. |
| GND | Ground. |
| OUT | Regulator Output. |

SGM2013**300mA, Low Power, Low Dropout,
3-Terminal, Linear Regulators****ELECTRICAL CHARACTERISTICS**(V_{IN} = V_{OUT} (NOMINAL) + 0.5V or 2.5V, whichever is greater, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------------|--------------------|---|-----------|-------|-------|-------------------|
| Input Voltage | V _{IN} | | 2.5 | | 5.5 | V |
| Output Voltage Accuracy | | I _{OUT} = 0.1mA | -2.5 | | 2.5 | % |
| Maximum Output Current | | | 300 | | | mA |
| Current Limit | I _{LIM} | | 310 | 500 | | mA |
| Ground Pin Current | I _G | No load, EN = 2V | | 100 | 200 | µA |
| Dropout Voltage ⁽¹⁾ | | I _{OUT} = 1mA | | 0.9 | | mV |
| | | I _{OUT} = 300mA | | 270 | 400 | |
| Line Regulation | ΔV _{LNR} | V _{IN} = 2.5V or (V _{OUT} + 0.5V) to 5.5V, I _{OUT} = 1mA | | 0.02 | 0.05 | %/V |
| Load Regulation | ΔV _{LDR} | I _{OUT} = 0.1mA to 300mA, C _{OUT} = 1µF, V _{OUT} > 2V | | 0.002 | 0.005 | %/mA |
| | | I _{OUT} = 0.1mA to 300mA, C _{OUT} = 1µF, V _{OUT} ≤ 2V | | 0.004 | 0.008 | |
| Output Voltage Noise | e _n | f = 10Hz to 100kHz, C _{OUT} = 10µF | | 140 | | µV _{RMS} |
| Power Supply Rejection Ratio | PSRR | I _{OUT} = 50mA, C _{OUT} = 1µF, V _{IN} = V _{OUT} + 1V | f = 217Hz | 72 | | dB |
| | | | f = 1kHz | 72 | | dB |
| THERMAL PROTECTION | | | | | | |
| Thermal Shutdown Temperature | T _{SHDN} | | | 150 | | °C |
| Thermal Shutdown Hysteresis | ΔT _{SHDN} | | | 15 | | °C |

NOTE:







1. The dropout voltage is defined as V_{IN} - V_{OUT}, when V_{OUT} is 100mV below the value of V_{OUT} for V_{IN} = V_{OUT} + 0.5V (only applicable for V_{OUT} = +2.5V to +5.0V).

SGM2013

**300mA, Low Power, Low Dropout,
3-Terminal, Linear Regulators**

TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

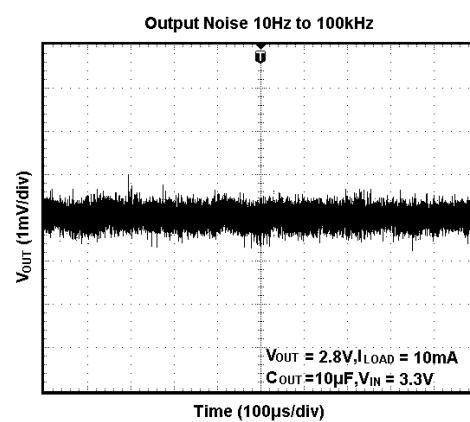
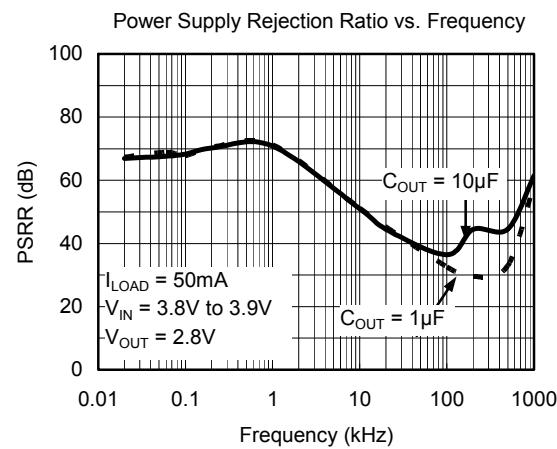
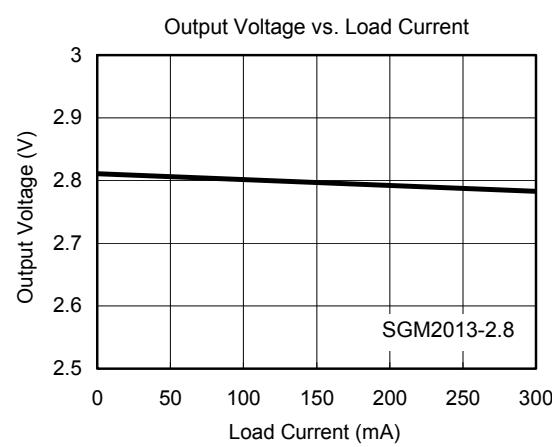
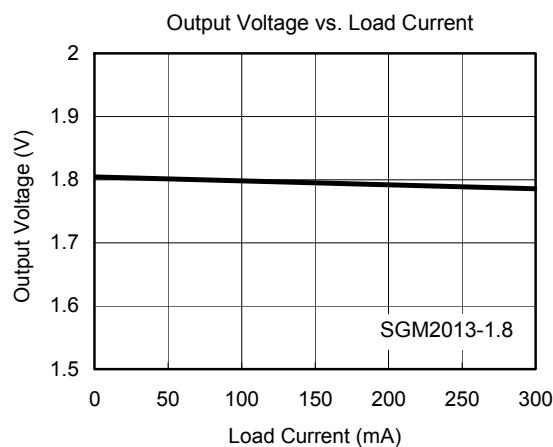
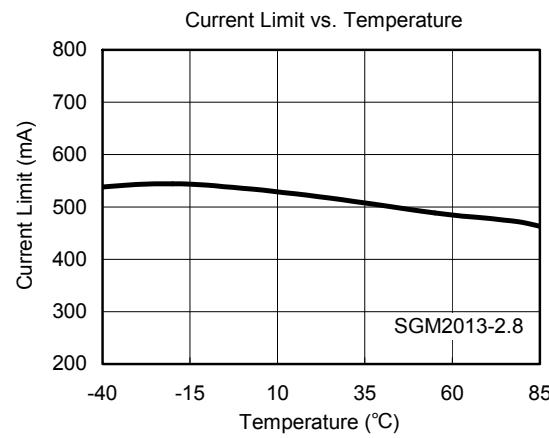
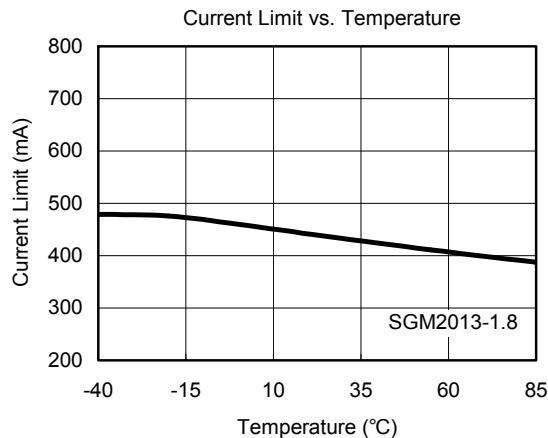


SGM2013

**300mA, Low Power, Low Dropout,
3-Terminal, Linear Regulators**







TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

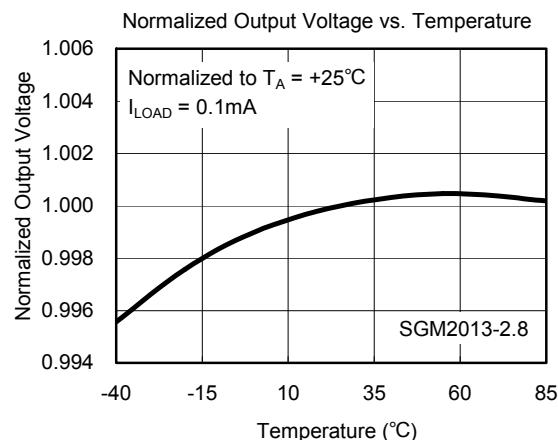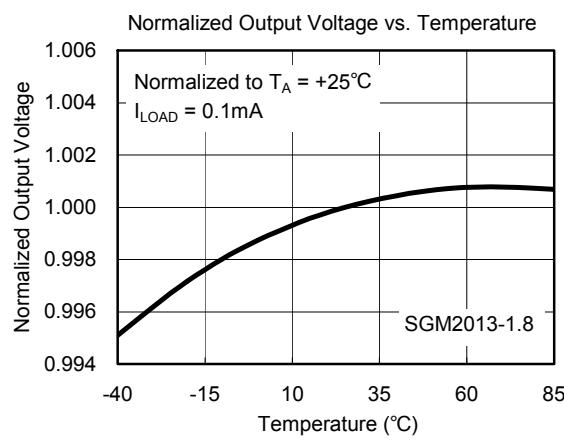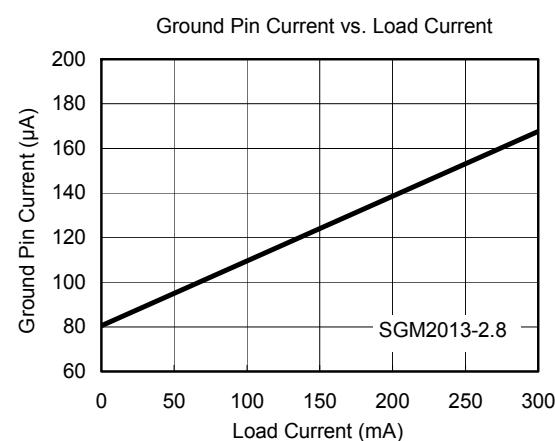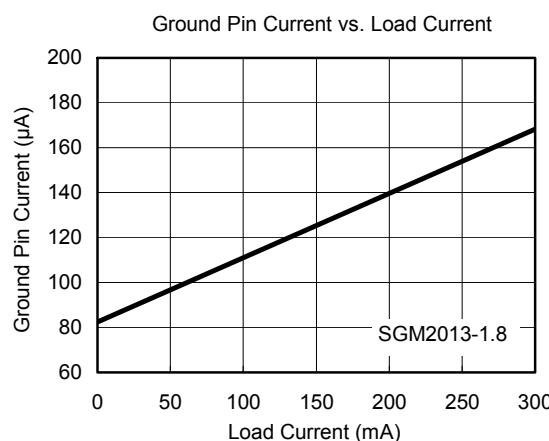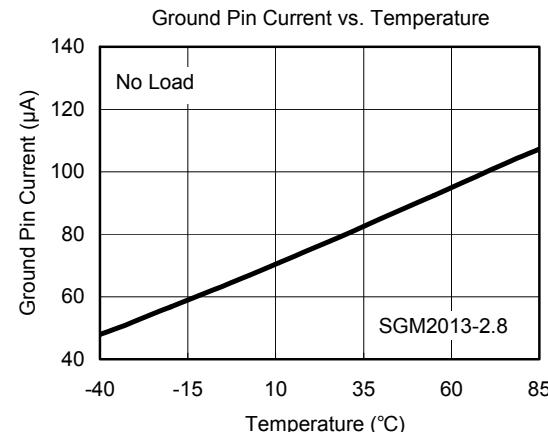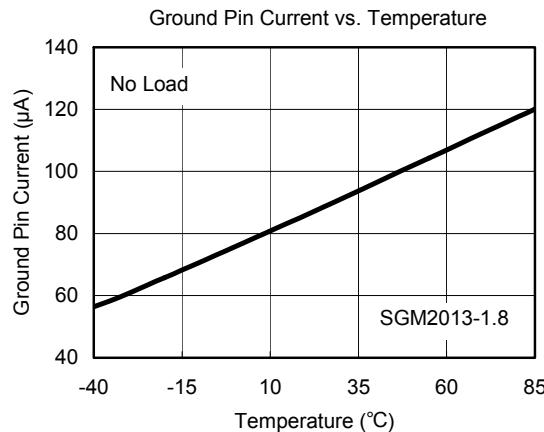



TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

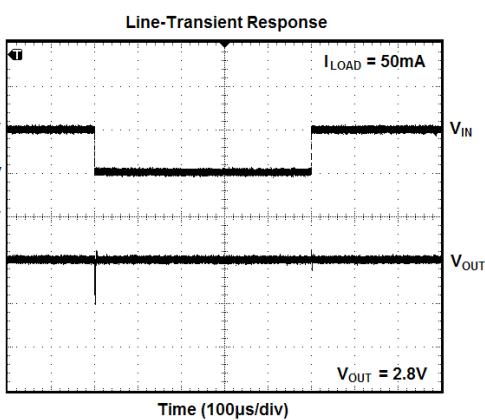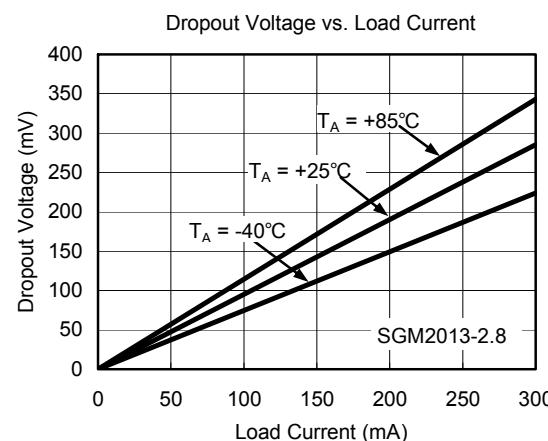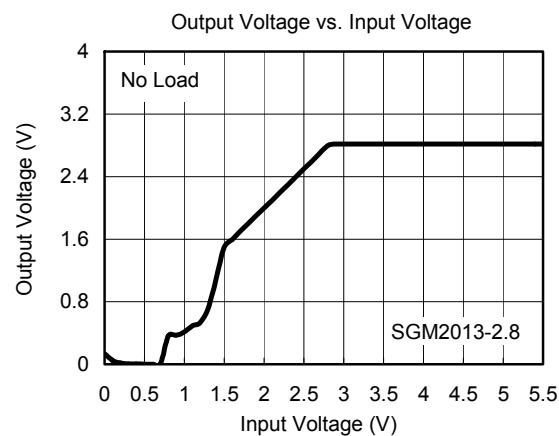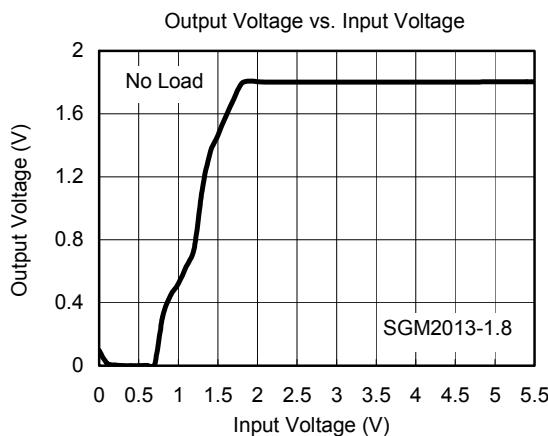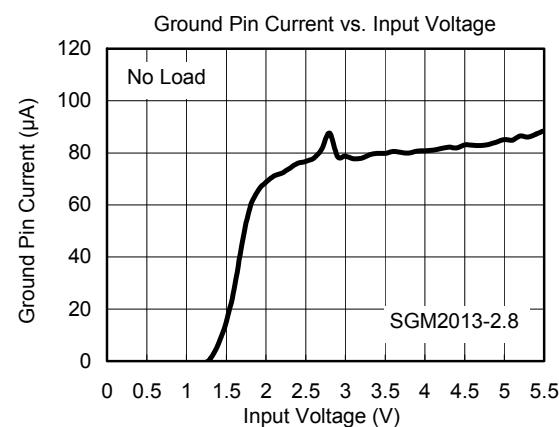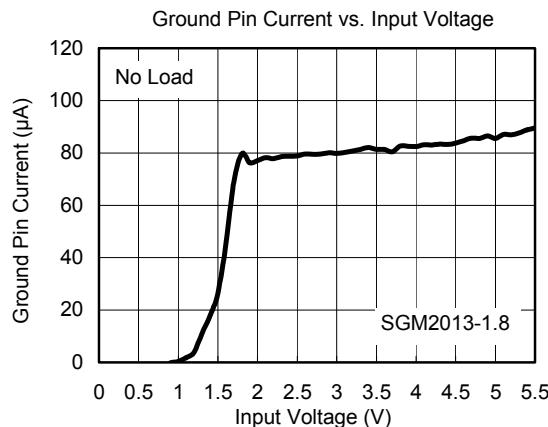


TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = V_{OUT\ (NOMINAL)} + 0.5V$ or $2.5V$ (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $T_A = +25^{\circ}C$, unless otherwise noted.

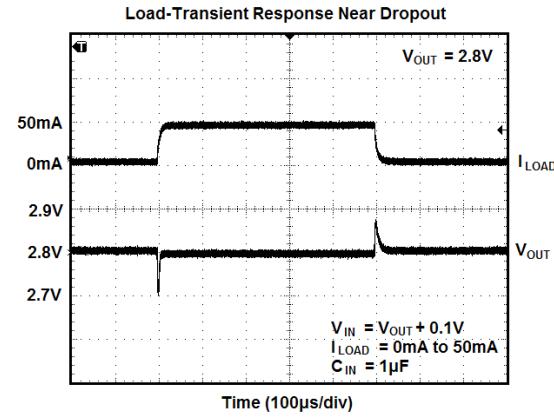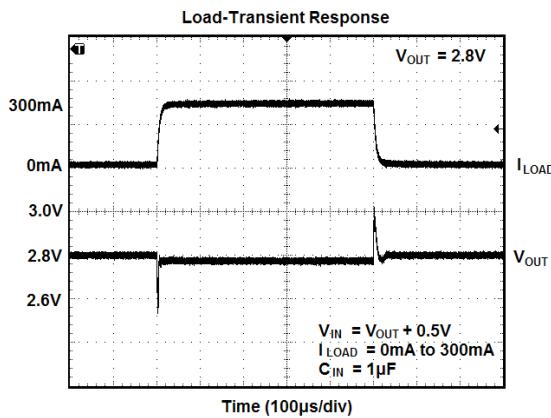


APPLICATION NOTE

When LDO is used in handheld products, attention must be paid to voltage spikes which could damage SGM2013. In such applications, voltage spikes will be generated at charger interface and V_{BUS} pin of USB interface when charger adapters and USB equipments are hot-plugged. Besides this, handheld products will be tested on the production line without battery. Test engineer will apply power from the connector pin which connects with positive pole of the battery. When external power supply is turned on suddenly, the voltage spikes will be generated at the battery connector. The voltage spikes will be very high, and it always exceeds the absolute maximum input voltage (6.0V) of LDO. In order to get robust design, design engineer needs to clear up this voltage spike. Zener diode is a cheap and effective solution to eliminate such voltage spike. For example, BZM55B5V6 is a 5.6V small package Zener diode which can be used to remove voltage spikes in cell phone designs. The schematic is shown below.

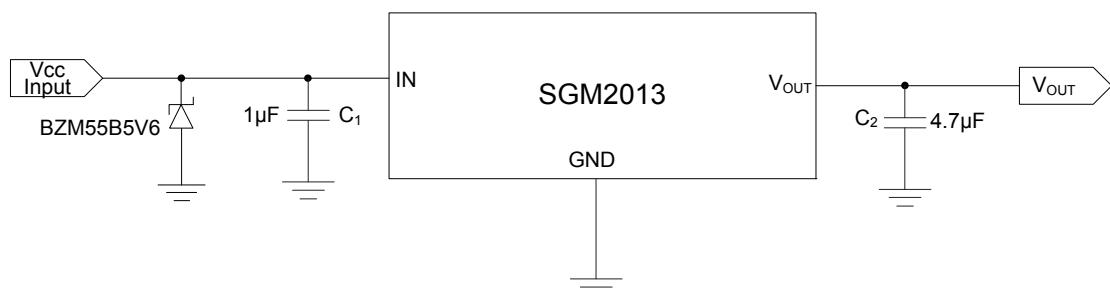

PACKAGE OUTLINE DIMENSIONS


SOT-89-3/SOT-89-3 (L-Type)

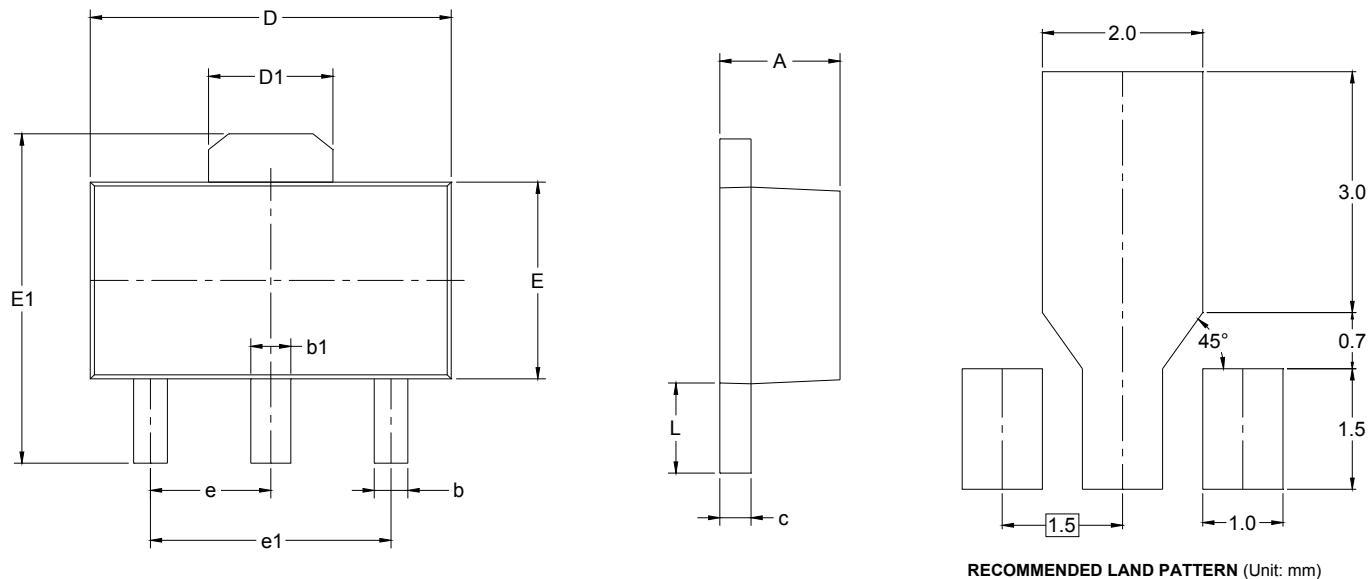


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF | | 0.061 REF | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP | | 0.060 TYP | |
| e1 | 3.000 TYP | | 0.118 TYP | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

TAPE AND REEL INFORMATION

REEL DIMENSIONS

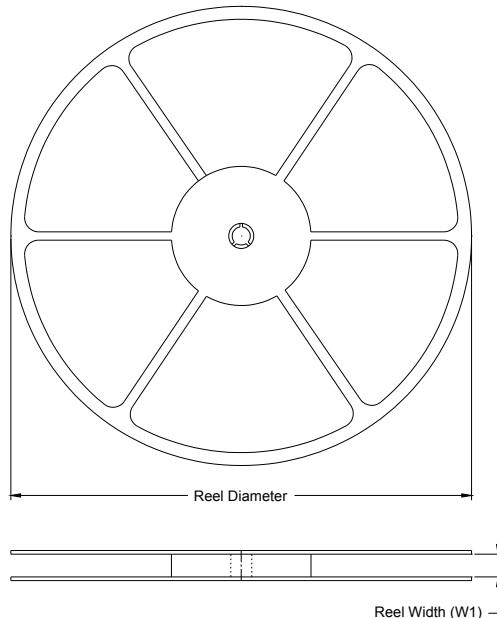


TAPE DIMENSIONS

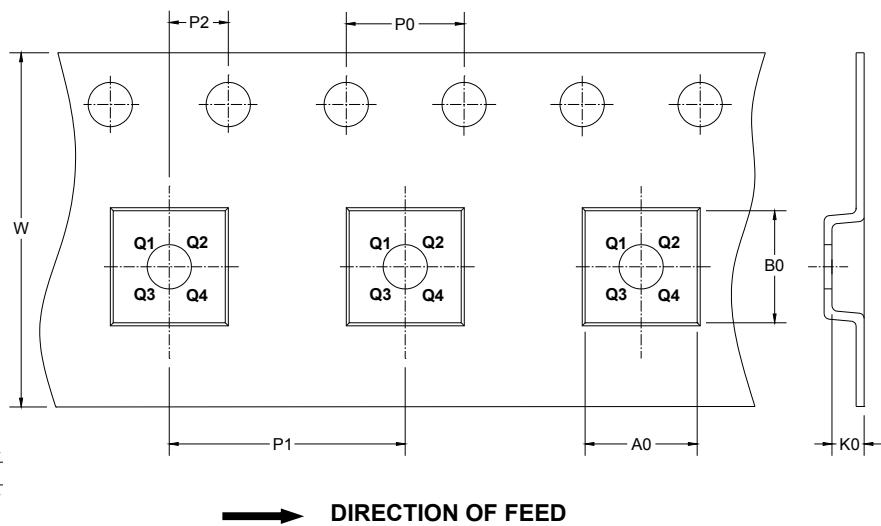

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------------|------------|------------|------------|------------|------------|------------|-----------|------------------|
| SOT-89-3 | 7" | 13.2 | 4.85 | 4.45 | 1.85 | 4.0 | 8.0 | 2.0 | 12.0 | Q3 |

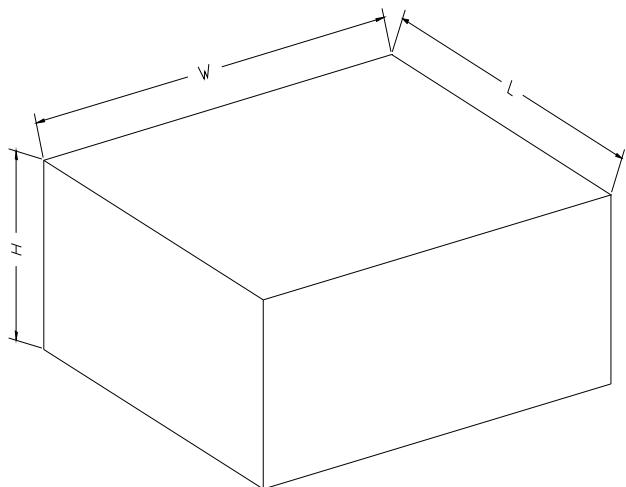CARTON BOX DIMENSIONS

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |