



## SGM7SZ126


### Small Logic Buffer with Three-State Output

#### GENERAL DESCRIPTION

The SGM7SZ126 is a single buffer with three-state output from SGMICRO's Small Logic series. The device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive while maintaining low static power dissipation over a broad  $V_{CC}$  operating range. The device is specified to operate over the 1.65V to 5.5V  $V_{CC}$  operating range. The inputs and output are high impedance when  $V_{CC}$  is 0V. Inputs tolerate voltages up to 6V, independent of  $V_{CC}$  operating voltage. The output tolerates voltages above  $V_{CC}$  in the 3-state condition.

The SGM7SZ126 is available in Green SOT-23-5 and SC70-5 packages. It operates over an ambient temperature range of -40°C to +85°C.

#### LOGIC SYMBOL

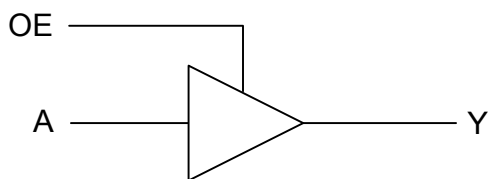

#### FEATURES

- **Ultra-High Speed:**  $t_{PD} = 3.4ns$  (TYP) into 50pF at  $V_{CC} = 3.3V$
- **High Output Drive:**  $\pm 24mA$  at  $V_{CC} = 3V$
- **Broad  $V_{CC}$  Operating Range:** 1.65V to 5.5V
- **Matches Performance of LCX Operated at  $V_{CC} = 3.3V$**
- **Power Down High-Impedance Inputs/Output**
- **Over-Voltage Tolerance Inputs Facilitate 5V to 3V Translation**
- **Available in Green SOT-23-5 and SC70-5 Packages**

#### FUNCTION TABLE

| INPUTS |   | OUTPUT |
|--------|---|--------|
| OE     | A | Y      |
| H      | L | L      |
| H      | H | H      |
| L      | X | Z      |

H = HIGH Logic Level

L = LOW Logic Level

X = HIGH or LOW Logic Level

Z = HIGH Impedance State



## PACKAGE/ORDERING INFORMATION

| MODEL     | PIN-PACKAGE | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER  | PACKAGE MARKING | PACKAGE OPTION      |
|-----------|-------------|-----------------------------|------------------|-----------------|---------------------|
| SGM7SZ126 | SC70-5      | -40°C to +85°C              | SGM7SZ126YC5G/TR | SG0XX           | Tape and Reel, 3000 |
|           | SOT-23-5    | -40°C to +85°C              | SGM7SZ126YN5G/TR | SG1XX           | Tape and Reel, 3000 |

NOTE: Order number and package marking are defined as the follow:

## ORDER NUMBER

**SGM7SZ126 X X G / TR**

- Tape and Reel**
- Green Product**
- Package Type**
  - N5 SOT-23-5
  - C5 SC70-5
- Operating Temperature Range**
  - Y -40°C to +85°C

## MARKING INFORMATION

**SYX X X**

- Date code - Month ("A" = Jan. "B" = Feb. ... "L" = Dec.)
- Date code - Year ("A" = 2010, "B" = 2011 ...)
- Chip I.D.

For example: SG0CC (2012, March)

## ABSOLUTE MAXIMUM RATINGS

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Supply Voltage, $V_{CC}$                             | -0.5V to 6.0V   |
| DC Input Voltage, $V_{IN}$                           | -0.5V to 6.0V   |
| DC Output Voltage, $V_{OUT}$                         | -0.5V to 6.0V   |
| DC Input Diode Current, $I_{IK}$                     |                 |
| ( $V_{IN} < -0.5V$ )                                 | -50mA           |
| DC Output Diode Current, $I_{OK}$                    |                 |
| ( $V_{OUT} < -0.5V$ )                                | -50mA           |
| DC Output Current, $I_{OUT}$                         | ±50mA           |
| DC $V_{CC}$ or Ground Current, $I_{CC}$ or $I_{GND}$ | ±50mA           |
| Operating Temperature Range                          | -40°C to +85°C  |
| Junction Temperature                                 | 150°C           |
| Storage Temperature                                  | -65°C to +150°C |
| Lead Temperature (Soldering, 10sec)                  | 260°C           |

## NOTE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


## CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.



PIN CONFIGURATIONS (TOP VIEW)

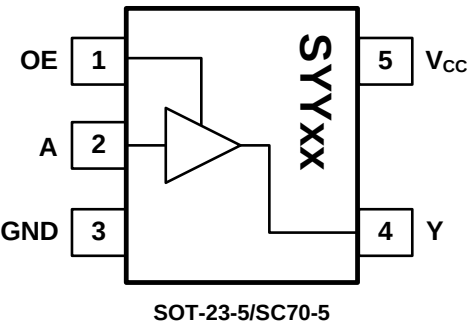

PIN DESCRIPTION

| PIN | NAME            | FUNCTION                                                        |
|-----|-----------------|-----------------------------------------------------------------|
| 1   | OE              | Input. Unused input must be held high or low. It may not float. |
| 2   | A               | Input. Unused input must be held high or low. It may not float. |
| 3   | GND             | Ground.                                                         |
| 4   | Y               | Output.                                                         |
| 5   | V <sub>CC</sub> | Power Supply.                                                   |

## ELECTRICAL CHARACTERISTICS

| PARAMETER                     | SYMBOL                          | CONDITIONS                                                                           |                          | V <sub>CC</sub> (V)     | T <sub>A</sub> = +25°C |      |                    | UNITS |  |
|-------------------------------|---------------------------------|--------------------------------------------------------------------------------------|--------------------------|-------------------------|------------------------|------|--------------------|-------|--|
|                               |                                 |                                                                                      |                          |                         | MIN                    | TYP  | MAX                |       |  |
| GENERAL                       |                                 |                                                                                      |                          |                         |                        |      |                    |       |  |
| Power Supply Range            | V <sub>CC</sub>                 |                                                                                      |                          |                         | 1.65                   |      | 5.50               | V     |  |
| Supply Voltage Data Retention |                                 |                                                                                      |                          |                         | 1.5                    |      | 5.50               | V     |  |
| Input Voltage                 | V <sub>IN</sub>                 |                                                                                      |                          |                         | 0.00                   |      | 5.50               | V     |  |
| Output Voltage                | V <sub>OUT</sub>                | Active State                                                                         |                          |                         | 0.00                   |      | V <sub>CC</sub>    | V     |  |
|                               |                                 | Three-State                                                                          |                          |                         | 0.00                   |      | 5.50               |       |  |
| Input Rise and Fall Times     | t <sub>r</sub> , t <sub>f</sub> |                                                                                      |                          | 1.8, 2.5 ± 0.2          | 0                      |      | 20                 | ns/V  |  |
|                               |                                 |                                                                                      |                          | 3.3 ± 0.3               | 0                      |      | 10                 |       |  |
|                               |                                 |                                                                                      |                          | 5.0 ± 0.5               | 0                      |      | 5                  |       |  |
| DC PERFORMANCE                |                                 |                                                                                      |                          |                         |                        |      |                    |       |  |
| HIGH Level Input Voltage      | V <sub>IH</sub>                 |                                                                                      |                          | 1.65 to 1.95            | 0.75V <sub>CC</sub>    |      |                    | V     |  |
|                               |                                 |                                                                                      |                          | 2.30 to 5.50            | 0.75V <sub>CC</sub>    |      |                    |       |  |
| LOW Level Input Voltage       | V <sub>IL</sub>                 |                                                                                      |                          | 1.65 to 1.95            |                        |      | 0.2V <sub>CC</sub> | V     |  |
|                               |                                 |                                                                                      |                          | 2.30 to 5.50            |                        |      | 0.2V <sub>CC</sub> |       |  |
| HIGH Level Output Voltage     | V <sub>OH</sub>                 | V <sub>IN</sub> = V <sub>IH</sub>                                                    | I <sub>OH</sub> = -100μA | 1.65                    |                        | 1.65 |                    | V     |  |
|                               |                                 |                                                                                      |                          | 1.80                    |                        | 1.80 |                    |       |  |
|                               |                                 |                                                                                      |                          | 2.30                    |                        | 2.30 |                    |       |  |
|                               |                                 |                                                                                      |                          | 3.00                    |                        | 3.00 |                    |       |  |
|                               |                                 |                                                                                      |                          | 4.50                    |                        | 4.50 |                    |       |  |
|                               |                                 |                                                                                      | I <sub>OH</sub> = -4mA   | 1.65                    |                        | 1.55 |                    |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OH</sub> = -8mA  | 2.30                   |      | 2.18               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OH</sub> = -16mA | 3.00                   |      | 2.80               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OH</sub> = -24mA | 3.00                   |      | 2.70               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OH</sub> = -32mA | 4.50                   |      | 4.20               |       |  |
| LOW Level Output Voltage      | V <sub>OL</sub>                 | V <sub>IN</sub> = V <sub>IL</sub>                                                    | I <sub>OL</sub> = 100μA  | 1.65                    |                        | 0.00 |                    | V     |  |
|                               |                                 |                                                                                      |                          | 1.80                    |                        | 0.00 |                    |       |  |
|                               |                                 |                                                                                      |                          | 2.30                    |                        | 0.00 |                    |       |  |
|                               |                                 |                                                                                      |                          | 3.00                    |                        | 0.00 |                    |       |  |
|                               |                                 |                                                                                      |                          | 4.50                    |                        | 0.00 |                    |       |  |
|                               |                                 |                                                                                      | I <sub>OL</sub> = 4mA    | 1.65                    |                        | 0.07 |                    |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OL</sub> = 8mA   | 2.30                   |      | 0.10               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OL</sub> = 16mA  | 3.00                   |      | 0.17               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OL</sub> = 24mA  | 3.00                   |      | 0.24               |       |  |
|                               |                                 |                                                                                      |                          | I <sub>OL</sub> = 32mA  | 4.50                   |      | 0.28               |       |  |
| Input Leakage Current         | I <sub>IN</sub>                 | V <sub>IN</sub> = 5.5V, GND                                                          |                          | 0 to 5.5                |                        | ±0.1 |                    | μA    |  |
| 3-STATE Output Leakage        | I <sub>OZ</sub>                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br>0V ≤ V <sub>OUT</sub> ≤ 5V |                          | 0 to 5.5                |                        | 0.10 |                    | μA    |  |
| Power Off Leakage Current     | I <sub>OFF</sub>                | V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V                                           |                          | 0                       |                        | 0.10 |                    | μA    |  |
| Quiescent Supply Current      | I <sub>CC</sub>                 | V <sub>IN</sub> = 5.5V, GND                                                          |                          | 1.65 to 5.5             |                        | 0.10 |                    | μA    |  |


## ELECTRICAL CHARACTERISTICS

| PARAMETER                                    | SYMBOL                              | CONDITIONS                      |                                                                                                                                                                                                                                                 | T <sub>A</sub> = +25°C |      |     | UNITS |
|----------------------------------------------|-------------------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-----|-------|
|                                              |                                     |                                 |                                                                                                                                                                                                                                                 | MIN                    | TYP  | MAX |       |
| AC PERFORMANCE                               |                                     |                                 |                                                                                                                                                                                                                                                 |                        |      |     |       |
| Propagation Delay                            | t <sub>PHL</sub> , t <sub>PLH</sub> | V <sub>CC</sub> = 1.65V         | C <sub>L</sub> = 15pF,<br>R <sub>D</sub> = 1MΩ,<br>S <sub>1</sub> = OPEN,<br>Figure 1, Figure 2                                                                                                                                                 |                        | 8.9  |     | ns    |
|                                              |                                     | V <sub>CC</sub> = 1.80V         |                                                                                                                                                                                                                                                 |                        | 7.1  |     |       |
|                                              |                                     | V <sub>CC</sub> = 2.50V ± 0.20V |                                                                                                                                                                                                                                                 |                        | 3.9  |     |       |
|                                              |                                     | V <sub>CC</sub> = 3.30V ± 0.30V |                                                                                                                                                                                                                                                 |                        | 3.0  |     |       |
|                                              |                                     | V <sub>CC</sub> = 5.00V ± 0.50V |                                                                                                                                                                                                                                                 |                        | 2.3  |     |       |
|                                              |                                     | V <sub>CC</sub> = 3.30V ± 0.30V | C <sub>L</sub> = 50pF, R <sub>D</sub> = 500Ω,<br>S <sub>1</sub> = OPEN, Figure 1, Figure 2                                                                                                                                                      |                        | 3.4  |     |       |
|                                              |                                     | V <sub>CC</sub> = 5.00V ± 0.50V |                                                                                                                                                                                                                                                 |                        | 2.6  |     |       |
| Output Enable Time                           | t <sub>PZL</sub> , t <sub>PZH</sub> | V <sub>CC</sub> = 1.65V         | C <sub>L</sub> = 50pF, R <sub>D</sub> = 500Ω,<br>R <sub>U</sub> = 500Ω,<br>S <sub>1</sub> = GND for t <sub>PZH</sub> ,<br>S <sub>1</sub> = V <sub>IN</sub> for t <sub>PZL</sub> ,<br>V <sub>IN</sub> = 2V <sub>CC</sub> ,<br>Figure 1, Figure 2 |                        | 9.1  |     | ns    |
|                                              |                                     | V <sub>CC</sub> = 1.80V         |                                                                                                                                                                                                                                                 |                        | 7.6  |     |       |
|                                              |                                     | V <sub>CC</sub> = 2.50V ± 0.20V |                                                                                                                                                                                                                                                 |                        | 3.6  |     |       |
|                                              |                                     | V <sub>CC</sub> = 3.30V ± 0.30V |                                                                                                                                                                                                                                                 |                        | 3.0  |     |       |
|                                              |                                     | V <sub>CC</sub> = 5.00V ± 0.50V |                                                                                                                                                                                                                                                 |                        | 2.5  |     |       |
| Output Disable Time                          | t <sub>PLZ</sub> , t <sub>PHZ</sub> | V <sub>CC</sub> = 1.65V         | C <sub>L</sub> = 50pF, R <sub>D</sub> = 500Ω,<br>R <sub>U</sub> = 500Ω,<br>S <sub>1</sub> = GND for t <sub>PHZ</sub> ,<br>S <sub>1</sub> = V <sub>IN</sub> for t <sub>PLZ</sub> ,<br>V <sub>IN</sub> = 2V <sub>CC</sub> ,<br>Figure 1, Figure 2 |                        | 8.2  |     | ns    |
|                                              |                                     | V <sub>CC</sub> = 1.80V         |                                                                                                                                                                                                                                                 |                        | 7.1  |     |       |
|                                              |                                     | V <sub>CC</sub> = 2.50V ± 0.20V |                                                                                                                                                                                                                                                 |                        | 5.0  |     |       |
|                                              |                                     | V <sub>CC</sub> = 3.30V ± 0.30V |                                                                                                                                                                                                                                                 |                        | 4.2  |     |       |
|                                              |                                     | V <sub>CC</sub> = 5.00V ± 0.50V |                                                                                                                                                                                                                                                 |                        | 3.5  |     |       |
| Input Capacitance                            | C <sub>IN</sub>                     | V <sub>CC</sub> = 0V            |                                                                                                                                                                                                                                                 |                        | 4.0  |     | pF    |
| Output Capacitance                           | C <sub>OUT</sub>                    | V <sub>CC</sub> = 0V            |                                                                                                                                                                                                                                                 |                        | 6.0  |     | pF    |
| Power Dissipation Capacitance <sup>(2)</sup> | C <sub>PD</sub>                     | V <sub>CC</sub> = 3.30V         | Figure 3                                                                                                                                                                                                                                        |                        | 15.0 |     | pF    |
|                                              |                                     | V <sub>CC</sub> = 5.00V         |                                                                                                                                                                                                                                                 |                        | 17.0 |     |       |

## NOTES:


- Unused inputs must be held HIGH or LOW. They may not float.
- C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle (see Figure 3). C<sub>PD</sub> is related to dynamic operating current I<sub>CCD</sub> by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>) (V<sub>CC</sub>) (f<sub>IN</sub>) + (I<sub>CC,Static</sub>).

## TEST CIRCUITS

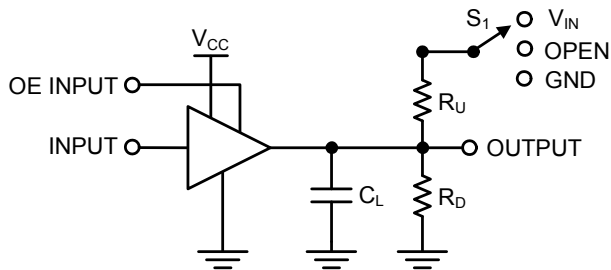

$C_L$  includes load and stray capacitance.  
Input PRR = 1.0MHz,  $t_W$  = 500ns.

Figure 1. AC Test Circuit

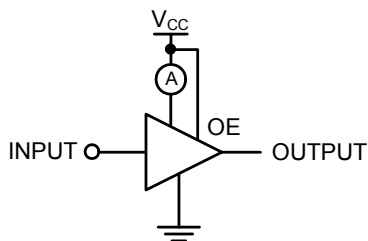

Input = AC Waveform;  $t_r = t_f = 1.8$ ns;  
PRR = 10MHz; Duty Cycle = 50%.


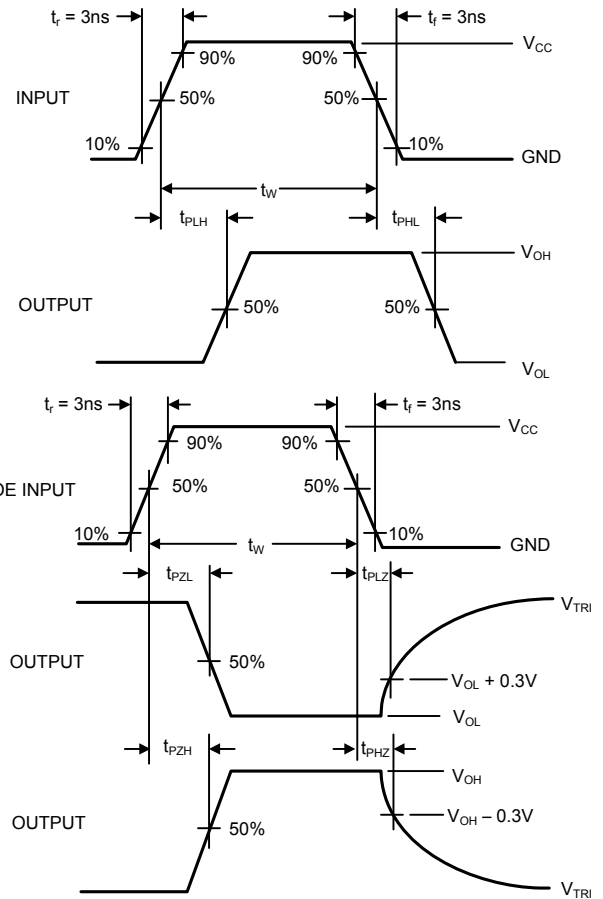
Figure 3.  $I_{CCD}$  Test Circuit

Figure 2. AC Waveforms

## PACKAGE OUTLINE DIMENSIONS



## SC70-5

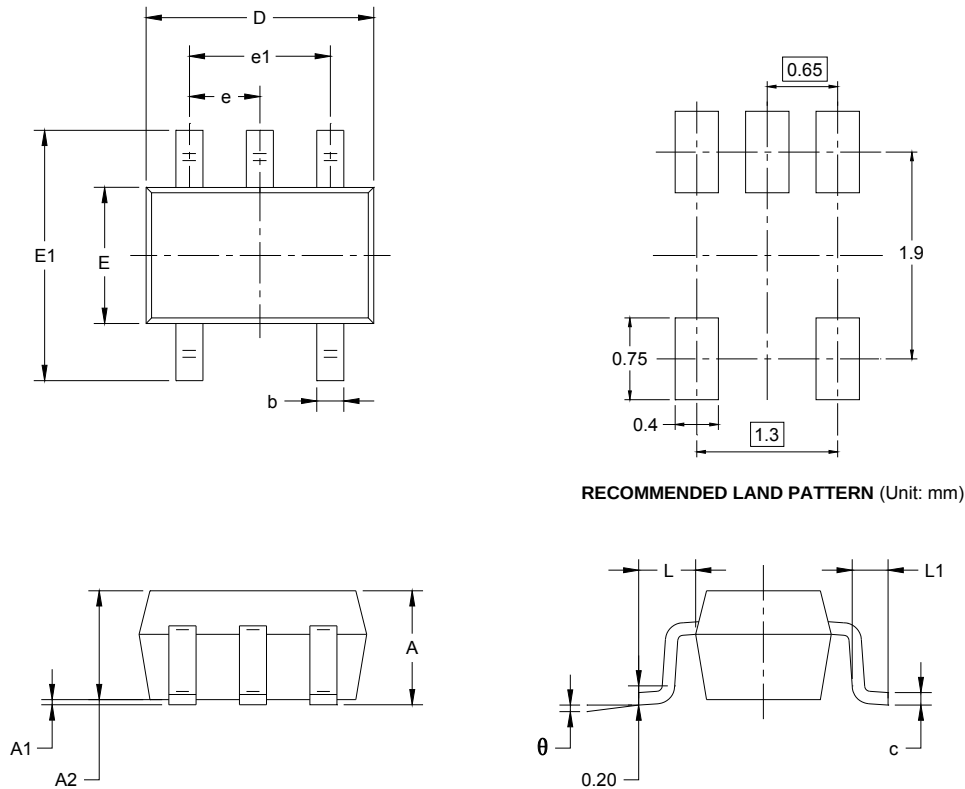



| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 0.900                        | 1.100 | 0.035                   | 0.043 |
| A1       | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2       | 0.900                        | 1.000 | 0.035                   | 0.039 |
| b        | 0.150                        | 0.350 | 0.006                   | 0.014 |
| c        | 0.080                        | 0.150 | 0.003                   | 0.006 |
| D        | 2.000                        | 2.200 | 0.079                   | 0.087 |
| E        | 1.150                        | 1.350 | 0.045                   | 0.053 |
| E1       | 2.150                        | 2.450 | 0.085                   | 0.096 |
| e        | 0.65 TYP                     |       | 0.026 TYP               |       |
| e1       | 1.300 BSC                    |       | 0.051 BSC               |       |
| L        | 0.525 REF                    |       | 0.021 REF               |       |
| L1       | 0.260                        | 0.460 | 0.010                   | 0.018 |
| $\theta$ | 0°                           | 8°    | 0°                      | 8°    |

## PACKAGE OUTLINE DIMENSIONS

## SOT-23-5

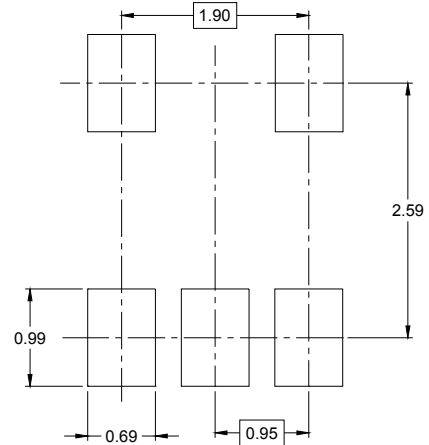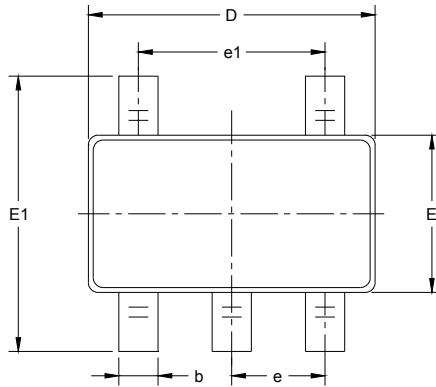

RECOMMENDED LAND PATTERN (Unit: mm)

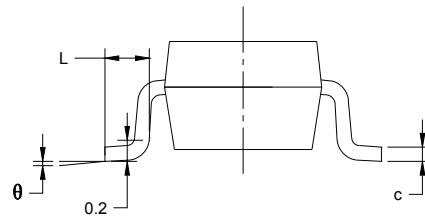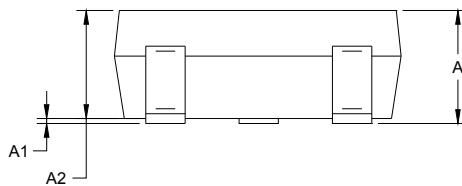

| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 1.050                        | 1.250 | 0.041                   | 0.049 |
| A1     | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2     | 1.050                        | 1.150 | 0.041                   | 0.045 |
| b      | 0.300                        | 0.500 | 0.012                   | 0.020 |
| c      | 0.100                        | 0.200 | 0.004                   | 0.008 |
| D      | 2.820                        | 3.020 | 0.111                   | 0.119 |
| E      | 1.500                        | 1.700 | 0.059                   | 0.067 |
| E1     | 2.650                        | 2.950 | 0.104                   | 0.116 |
| e      | 0.950 BSC                    |       | 0.037 BSC               |       |
| e1     | 1.900 BSC                    |       | 0.075 BSC               |       |
| L      | 0.300                        | 0.600 | 0.012                   | 0.024 |
| θ      | 0°                           | 8°    | 0°                      | 8°    |