

GENERAL DESCRIPTION

The SGM2581 is an integrated 100mΩ (TYP) power switch for self-powered and bus-powered Universal Series Bus (USB) applications.

The SGM2581 is internally current limited and has thermal shutdown that protects device and load from over-current damage. Thermal shutdown shuts off the output MOSFET and asserts the $\overline{\text{FAULT}}$ output if the die temperature exceeds 150°C until the die temperature drops to 130°C.

This device employs soft-start circuit that minimizes inrush current in applications where highly capacitive loads are employed.

An open drain $\overline{\text{FAULT}}$ flag asserts low during over-current and thermal conditions after a 13ms blanking time to prevent false reporting.

SGM2581 is available in the Green SOT-23-5 package. It is rated over the -40°C to +85°C temperature range.

APPLICATIONS

General Purpose Power Switching
 USB Bus/Self Powered Hubs/ Peripherals
 ACPI Power Distribution
 Smart Phone & LCD TV

FEATURES

- 100mΩ (TYP) High-side N-Channel MOSFET
- Three Current Limit Levels
 - SGM2581A/B/G: 1100 ± 110mA
 - SGM2581C/D/I: 2100 ± 220mA
 - SGM2581E/F/K: 2600 ± 310mA
- Input Voltage Range: 2.5V to 5.5V
- Low 23μA Quiescent Current
- Typical 0.1μA Shutdown Current
- Soft-Start Function
- Thermal Shutdown Protection
- Under-Voltage Lockout Protection for VIN
- No Reversed Leakage Current (Reverse Blocking)
- Fault Flag ($\overline{\text{FAULT}}$) with 13ms Filter Eliminates False Assertions
- Automatic Output Discharge in Shutdown Mode (SGM2581A/B/C/D/E/F)
- 500kΩ Pull-Down Resistor at EN Pin (SGM2581G/I/K)
- Evaluated to IEC 60950-1, Ed 2, Am1, Annex CC, Test Program 1 with CB Report (SGM2581A/C/E)
- Available in the Green SOT-23-5 Package

TYPICAL APPLICATION

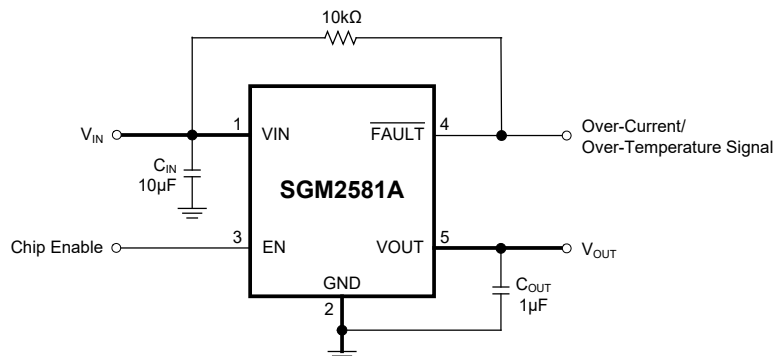


Figure 1. Typical Application Circuit


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2581A (Active High)	SOT-23-5	-40°C to +85°C	SGM2581AYN5G/TR	ST5XX	Tape and Reel, 3000
SGM2581B (Active Low)	SOT-23-5	-40°C to +85°C	SGM2581BYN5G/TR	STDXX	Tape and Reel, 3000
SGM2581C (Active High)	SOT-23-5	-40°C to +85°C	SGM2581CYN5G/TR	SU4XX	Tape and Reel, 3000
SGM2581D (Active Low)	SOT-23-5	-40°C to +85°C	SGM2581DYN5G/TR	SU5XX	Tape and Reel, 3000
SGM2581E (Active High)	SOT-23-5	-40°C to +85°C	SGM2581EYN5G/TR	SU6XX	Tape and Reel, 3000
SGM2581F (Active Low)	SOT-23-5	-40°C to +85°C	SGM2581FYN5G/TR	SU7XX	Tape and Reel, 3000
SGM2581G (Active High)	SOT-23-5	-40°C to +85°C	SGM2581GYN5G/TR	G57XX	Tape and Reel, 3000
SGM2581I (Active High)	SOT-23-5	-40°C to +85°C	SGM2581IYN5G/TR	G58XX	Tape and Reel, 3000
SGM2581K (Active High)	SOT-23-5	-40°C to +85°C	SGM2581KYN5G/TR	G59XX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code.

YYY X X



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

All Pins.....	6V
FAULT Current.....	25mA
Power Dissipation, P_D @ $T_A = +25^\circ\text{C}$	
SOT-23-5.....	0.3W
Package Thermal Resistance	
SOT-23-5, θ_{JA}	280°C/W
SOT-23-5, θ_{JC}	93°C/W
Junction Temperature.....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	2000V
MM.....	400V

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range.....	2.5V to 5.5V
EN Voltage Range.....	-0.3V to 5.5V
All Other Pins.....	0V to 5.5V
Junction Temperature Range.....	-40°C to +125°C
Operating Temperature Range.....	-40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

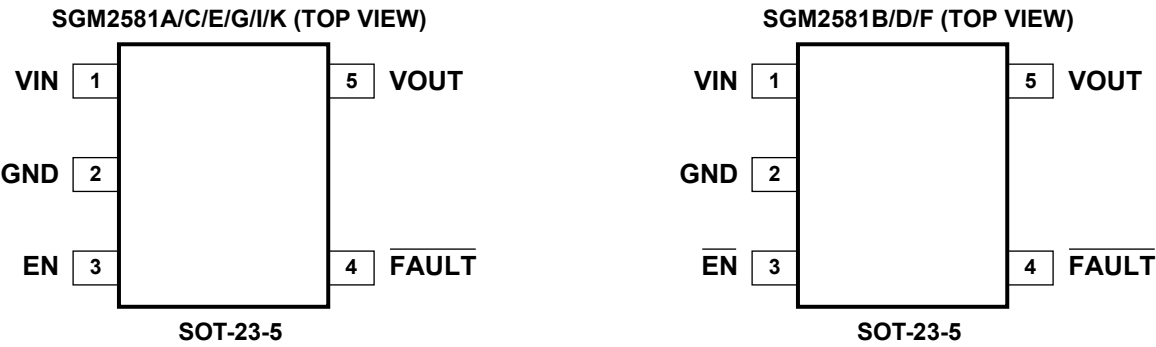

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	VIN	Power Input Voltage.
2	GND	Ground.
3	EN/ $\overline{\text{EN}}$	Chip Enable. Do not floating for SGM2581A/B/C/D/E/F. Active HIGH for SGM2581A/C/E/G/I/K (EN) and active LOW for SGM2581B/D/F ($\overline{\text{EN}}$). SGM2581G/I/K have integrated a 500k Ω pull-down resistor at EN PIN.
4	$\overline{\text{FAULT}}$	Fault Flag. Active low, open-drain output. Indicates over-current or thermal shutdown conditions. Over-current condition must last longer than t_b in order to assert $\overline{\text{FAULT}}$.
5	VOUT	Output Voltage.

TEST CIRCUIT

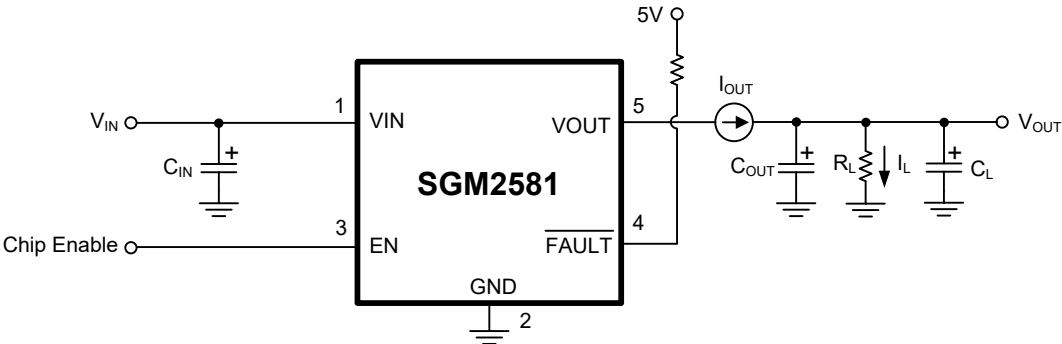


Figure 2. SGM2581 Test Circuit

ELECTRICAL CHARACTERISTICS


(At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.)

PARAMETER		SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range		V _{IN}		2.5		5.5	V
Quiescent Supply Current		I _Q	Switch on, V _{OUT} = open		23	35	μA
Shutdown Supply Current		I _{SD}	Switch off, V _{OUT} = open		0.1		μA
Supply Leakage Current (SGM2581A/B/C/D/E/F)		I _{LEAKAGE}	Switch off, V _{OUT} = 0V		0.1		μA
Output Leakage Current (SGM2581G/I/K)			Switch off, V _{OUT} = 5V		0.1		μA
Enable Input Threshold		V _{IH}	V _{IN} = 2.5V to 5.5V	1.6			V
		V _{IL}	V _{IN} = 2.5V to 5.5V			0.4	
Enable Input Current (SGM2581A/B/C/D/E/F)		I _{EN}	V _{EN} = 0V to 5V		0.1		μA
EN Pin Pull-Down Resistor (SGM2581G/I/K)		R _{PULL_DOWN}			500		kΩ
Switch Resistance		R _{DS(ON)}	I _{OUT} = 500mA		100		mΩ
Output Turn-On Delay Time		t _{ON}	R _L = 10Ω, C _L = 1μF, Figure 3		2.3		ms
Output Turn-Off Delay Time		t _{OFF}	R _L = 10Ω, C _L = 1μF, Figure 3		25		μs
Current Limit Threshold	SGM2581A/B/G	I _{LIM}	Ramped load	990	1100	1210	mA
	SGM2581C/D/I		Ramped load	1880	2100	2320	
	SGM2581E/F/K		Ramped load	2290	2600	2910	
Over-Current $\overline{\text{FAULT}}$ Response Delay Time		t _D	Apply V _{OUT} = 0 until $\overline{\text{FAULT}}$ is low		13		ms
Under-Voltage Lockout Threshold		V _{UVLO}	V _{IN} rising		2.15	2.3	V
Under-Voltage Lockout Threshold Hysteresis					0.1		V
$\overline{\text{FAULT}}$ Output Resistance		R _{$\overline{\text{FAULT}}$}	$\overline{\text{FAULT}}$ is low and I _{SINK} = 10mA		20		Ω
$\overline{\text{FAULT}}$ Leakage Current		I _{$\overline{\text{FAULT}}$}	$\overline{\text{FAULT}}$ is high		0.1		μA
V _{OUT} Shutdown Discharge Resistance (SGM2581A/B/C/D/E/F)		R _{DIS}	Switch off		50		Ω
Thermal Shutdown Temperature			T _J increasing		150		°C
Thermal Shutdown Hysteresis					20		°C


TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


Quiescent Supply Current vs. Temperature

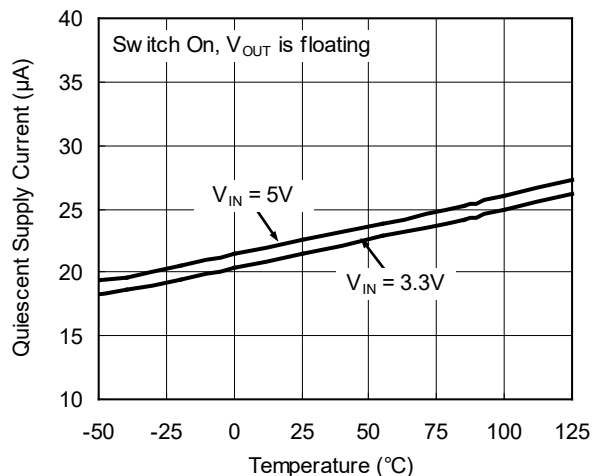


Quiescent Supply Current vs. Input Voltage

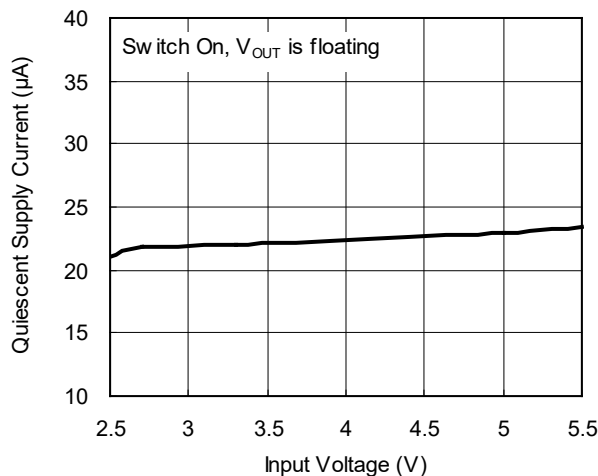


Shutdown Supply Current vs. Temperature

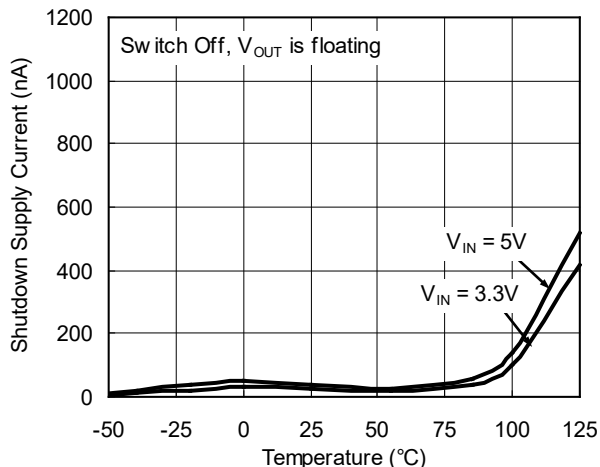


Shutdown Supply Current vs. Input Voltage

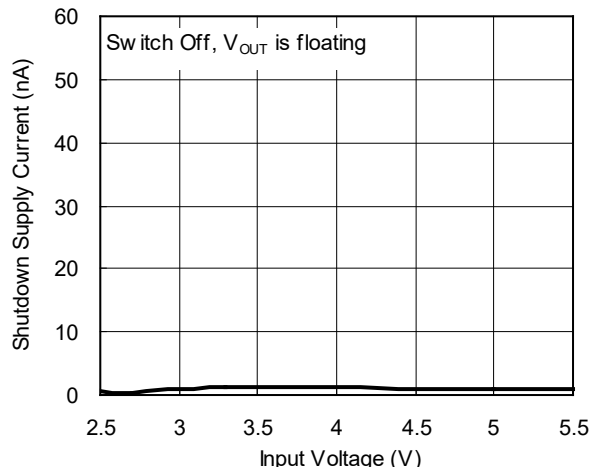

Enable Threshold vs. Temperature

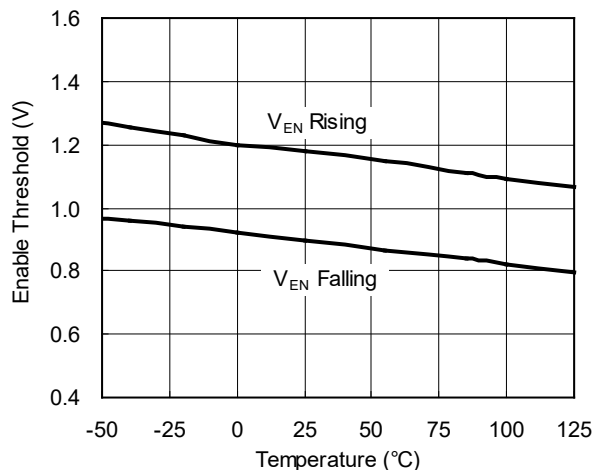


Enable Threshold vs. Input Voltage

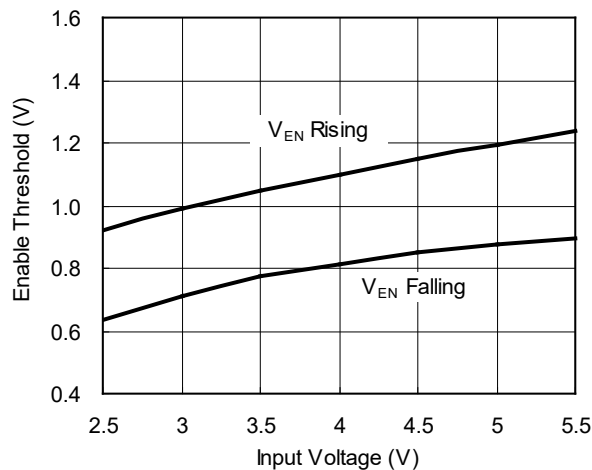


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


On Resistance vs. Temperature

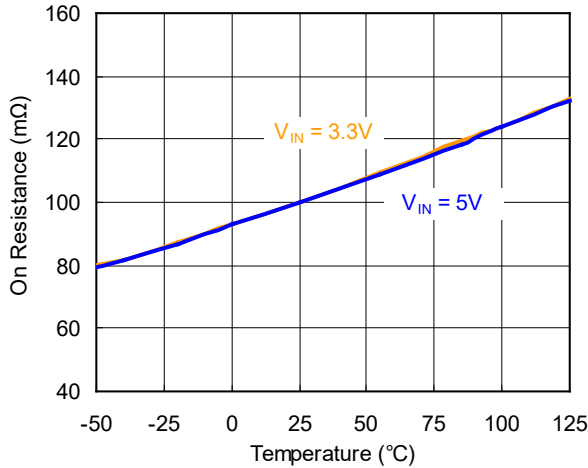


On Resistance vs. Input Voltage

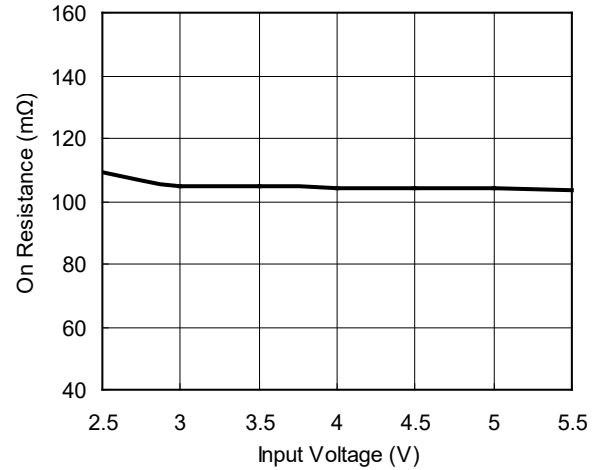


Turn-On (Rise) Time vs. Temperature

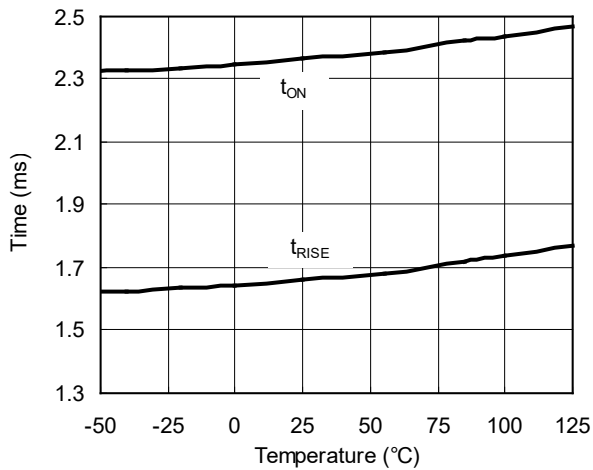


Turn-On (Rise) Time vs. Input Voltage

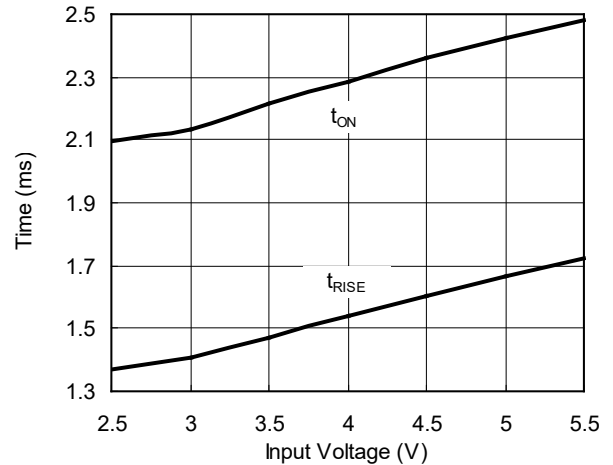

UVLO Threshold vs. Temperature

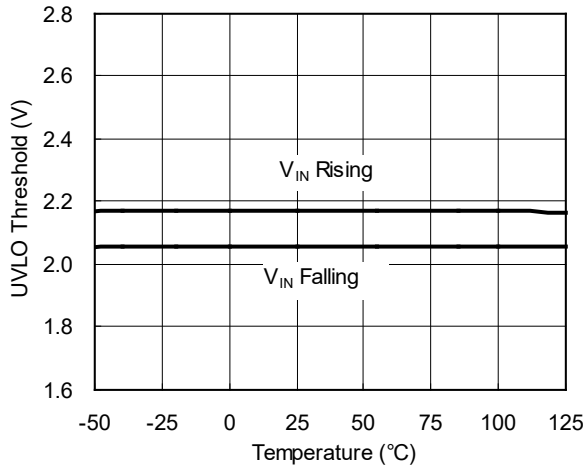


Supply Leakage Current vs. Temperature

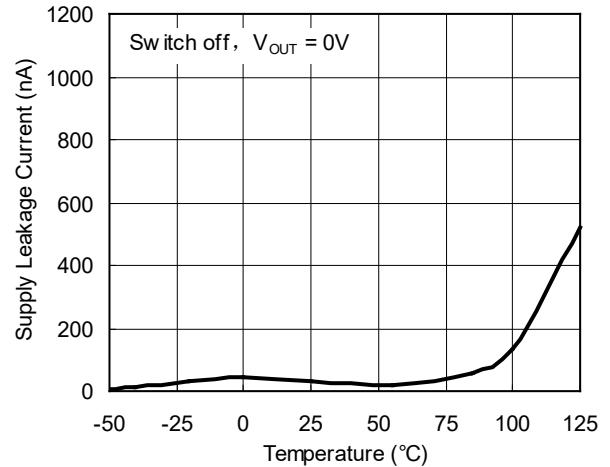


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


Short-Circuit Current Limit vs. Temperature
(SGM2581A/B/G)

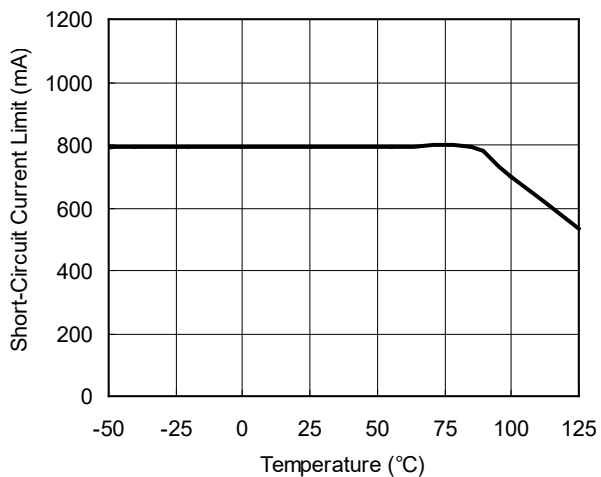


Short-Circuit Current Limit vs. Input Voltage
(SGM2581A/B/G)

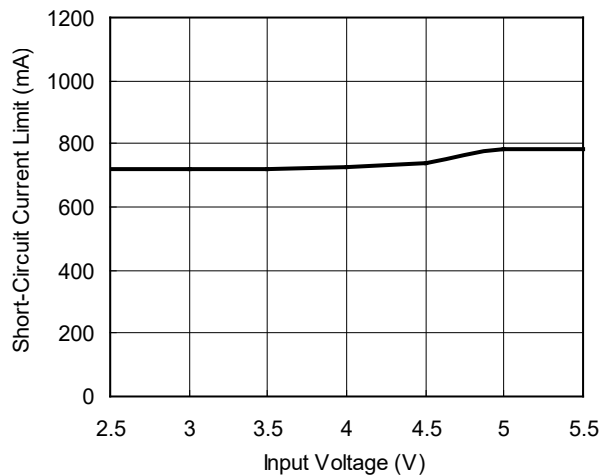


Current Limit Threshold vs. Temperature
(SGM2581A/B/G)

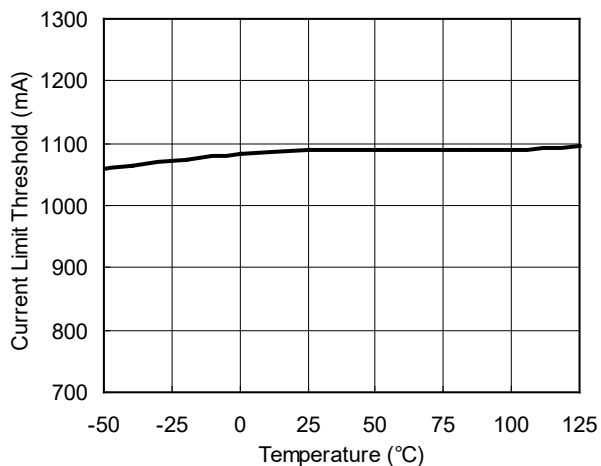


Current Limit Threshold vs. Input Voltage
(SGM2581A/B/G)

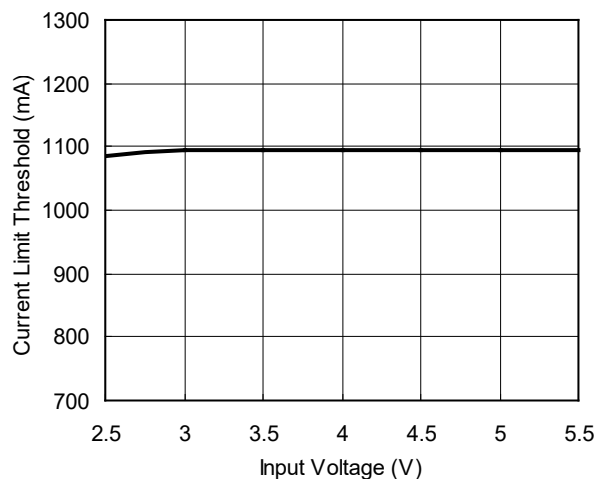

Current Limit Threshold vs. Input Voltage
(SGM2581C/D/I)

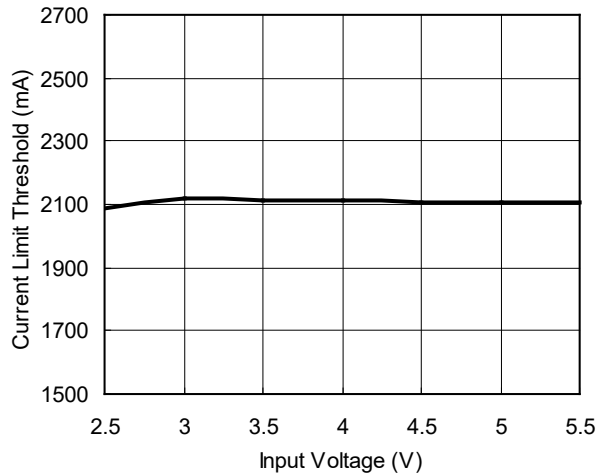


Current Limit Threshold vs. Input Voltage
(SGM2581E/F/K)

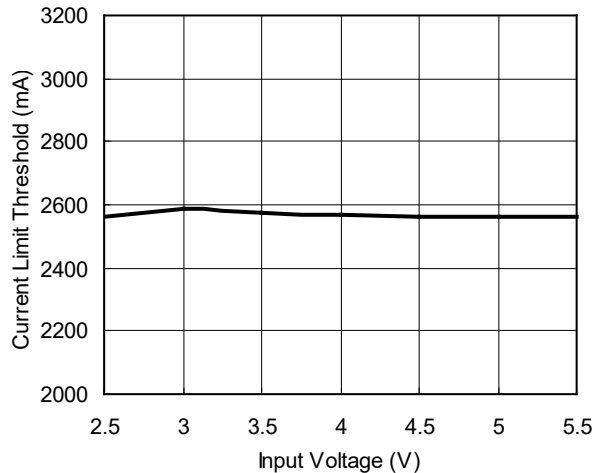




TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


Turn-On Response (SGM2581A/C/E/G/I/K)

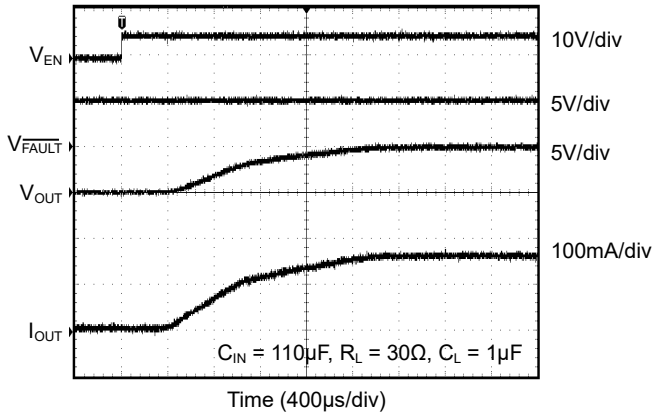


Turn-Off Response (SGM2581A/C/E/G/I/K)

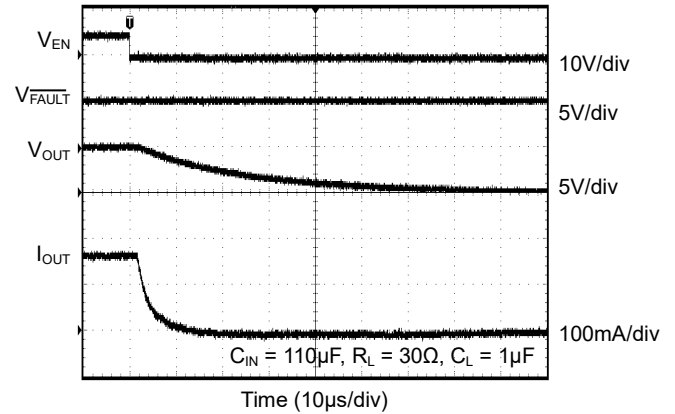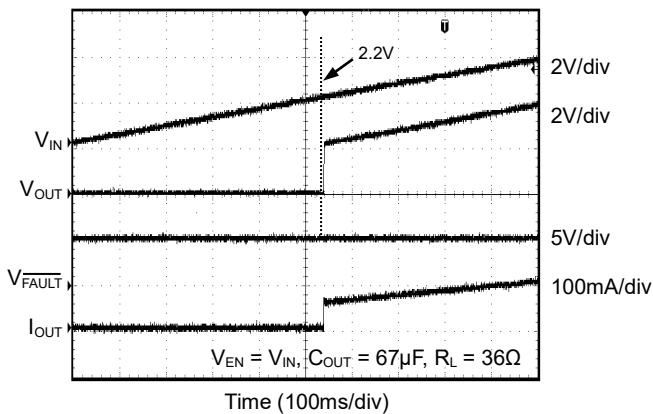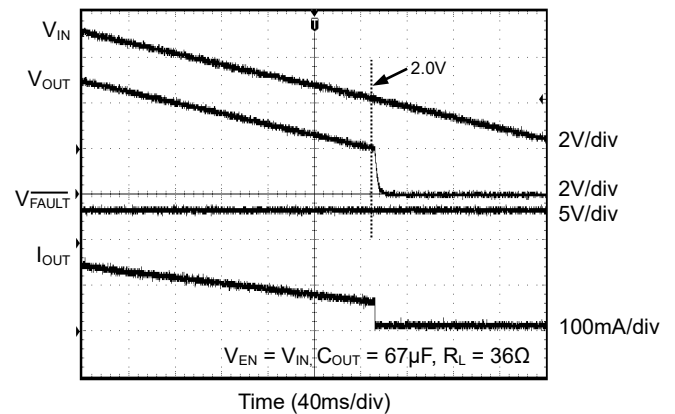UVLO at V_{IN} RisingUVLO at V_{IN} Falling

Short-Circuit Response (SGM2581A/B/G)

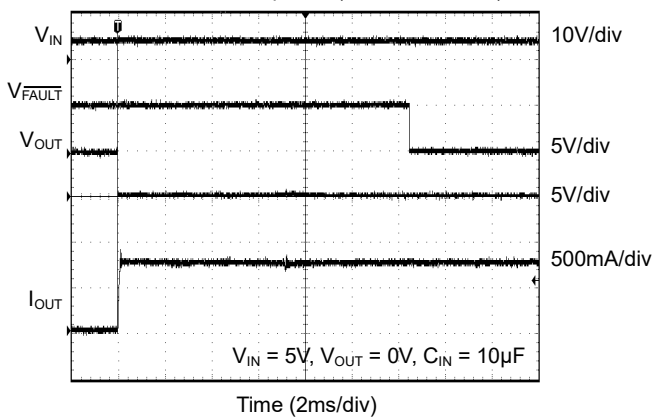


Short-Circuit Response (SGM2581A/B/G)

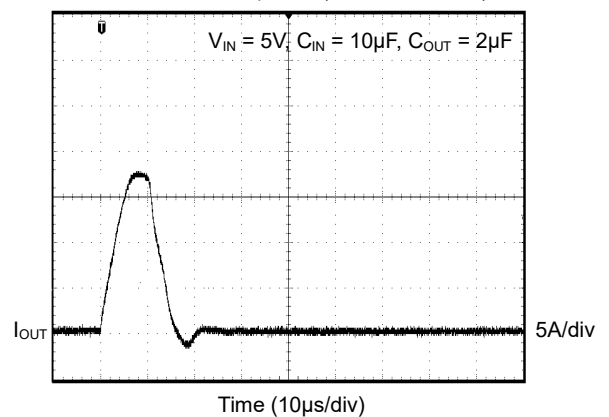


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


Enabled Into Short-Circuit (SGM2581A/G)

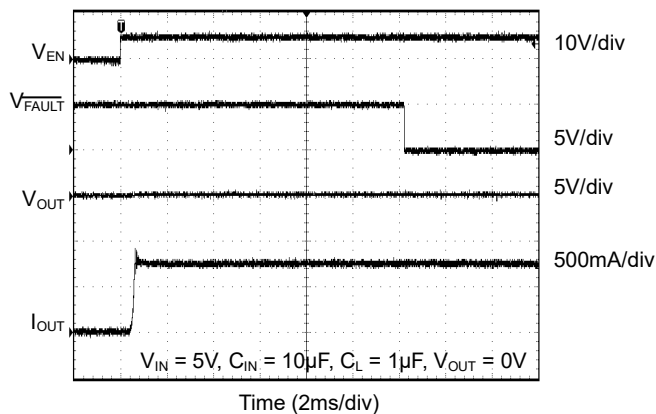


Thermal Shutdown Response (SGM2581A/G)

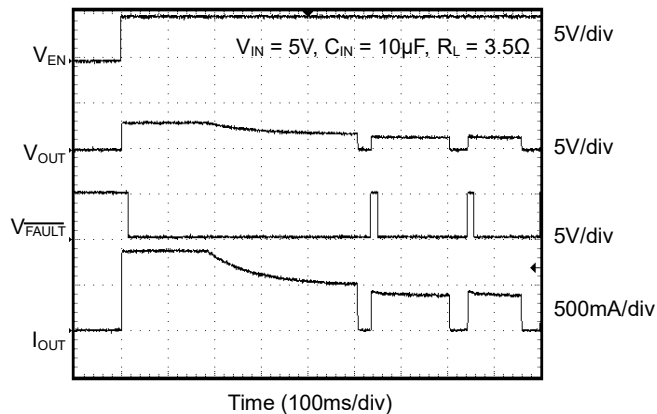


Inrush Current Response (SGM2581A/G)

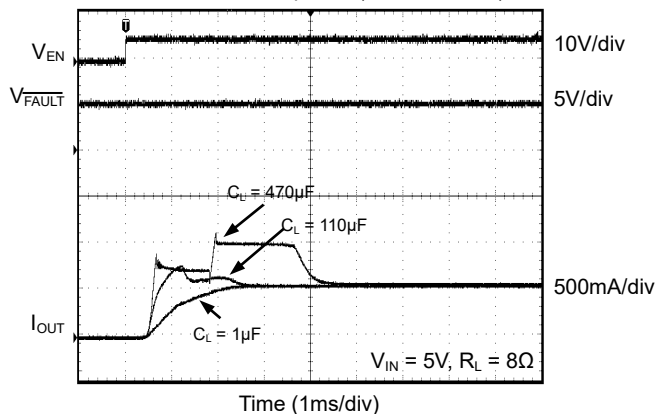

Inrush Current Response (SGM2581C/I)

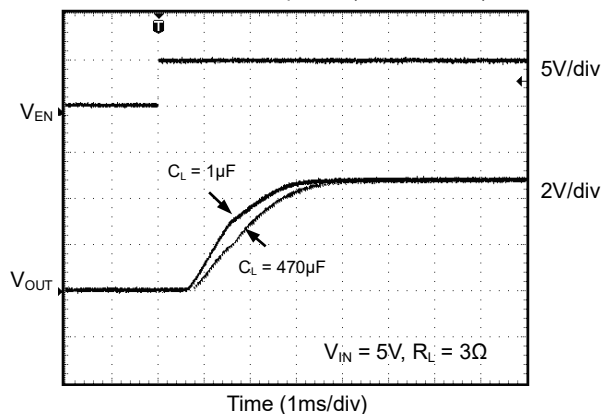


Inrush Current Response (SGM2581E/K)

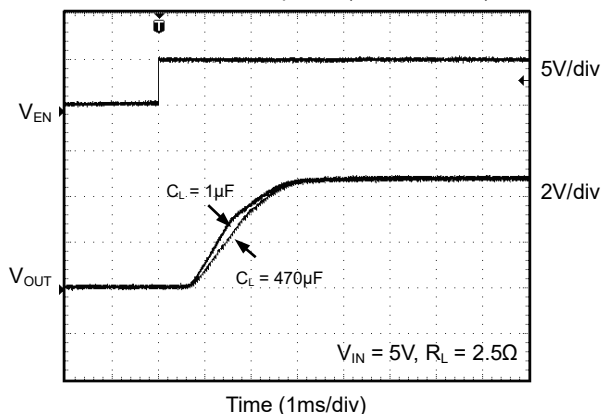


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, unless otherwise noted.


Capacitance Load Inrush Response
(SGM2581A/B/G)

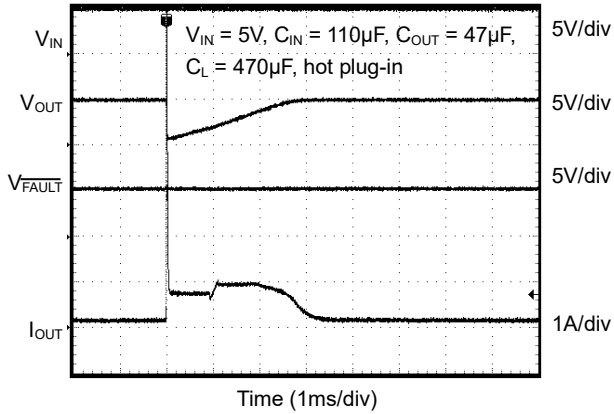


Capacitance Load Inrush Response
(SGM2581A/B/G)

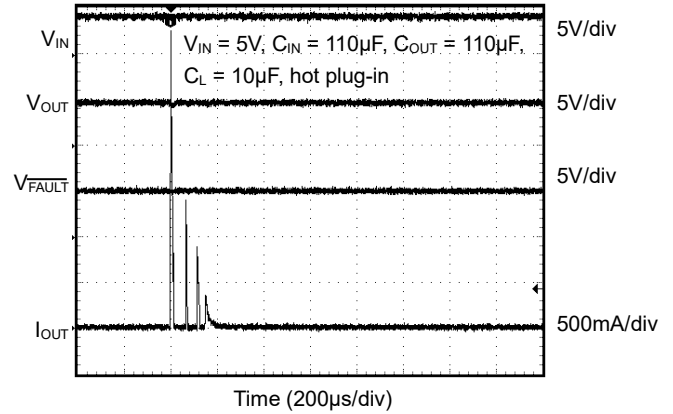


Ramped Load Response (SGM2581A/B/G)

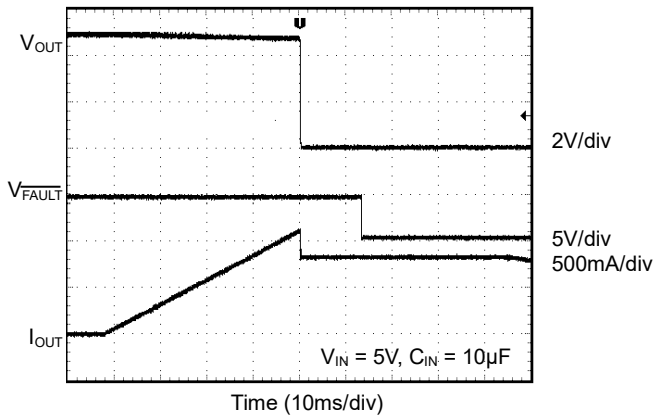

Ramped Load Response (SGM2581E/F/K)

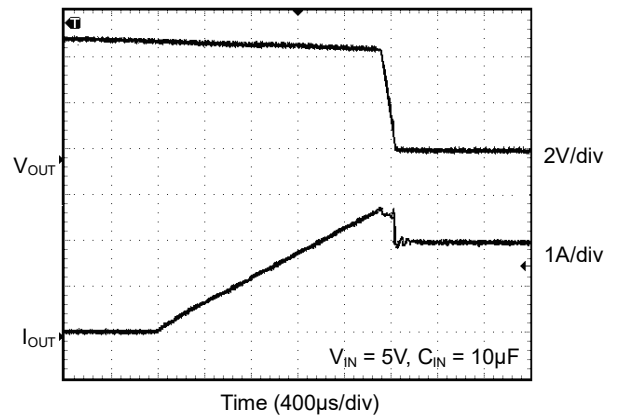

Resistance Load Inrush Response
(SGM2581A/B/G)

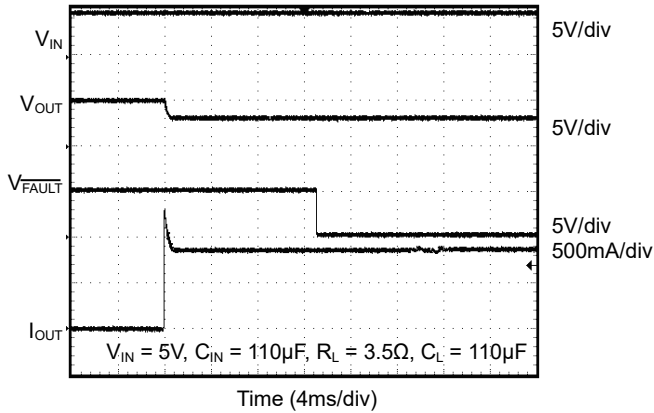

TIMING DIAGRAM

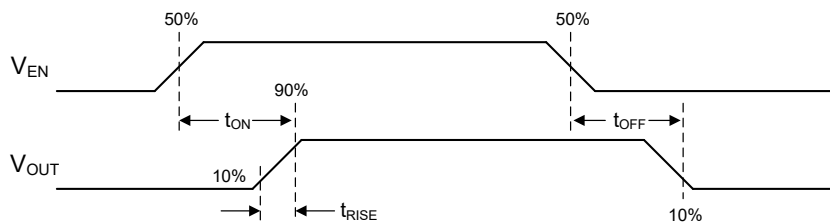


Figure 3. SGM2581A/C/E/G/I/K Switch Turn-On and Turn-Off Delay Times

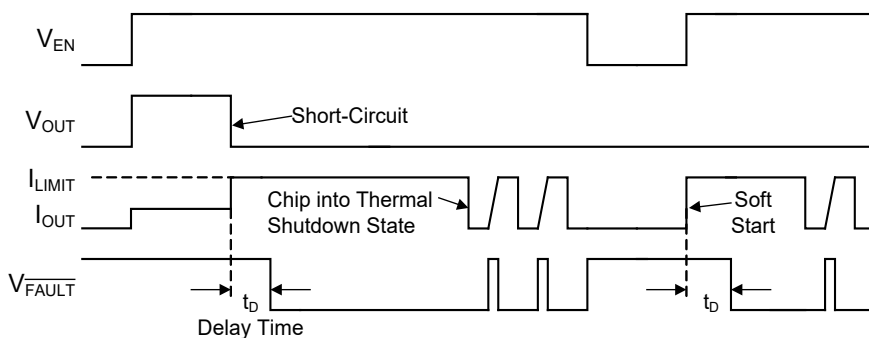


Figure 4. SGM2581A/C/E/G/I/K Fault Timing: Output Reset by Toggling EN

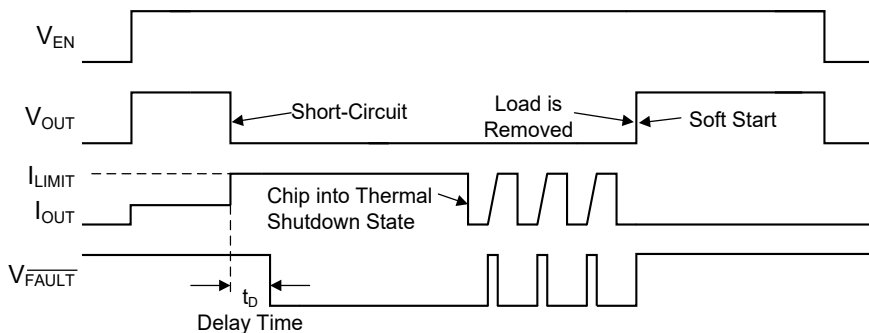


Figure 5. SGM2581A/C/E/G/I/K Fault Timing: Output Reset by Removing Load

FUNCTIONAL BLOCK DIAGRAM

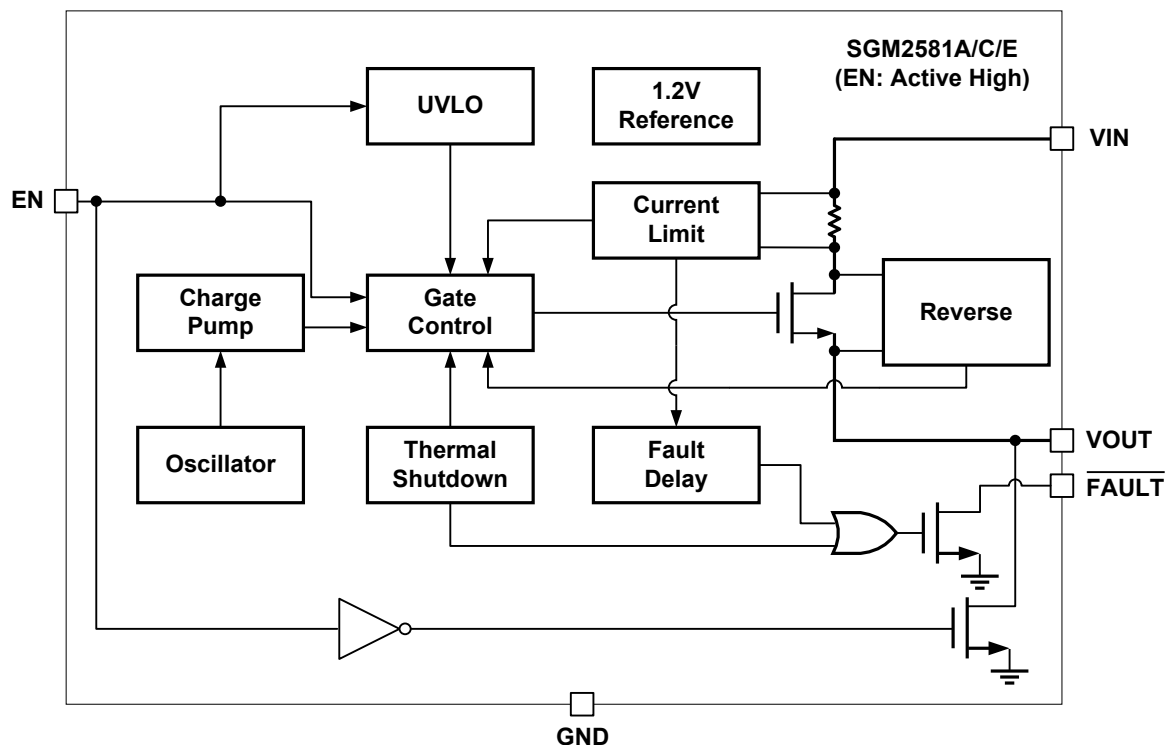


Figure 6. SGM2581A/C/E Block Diagram

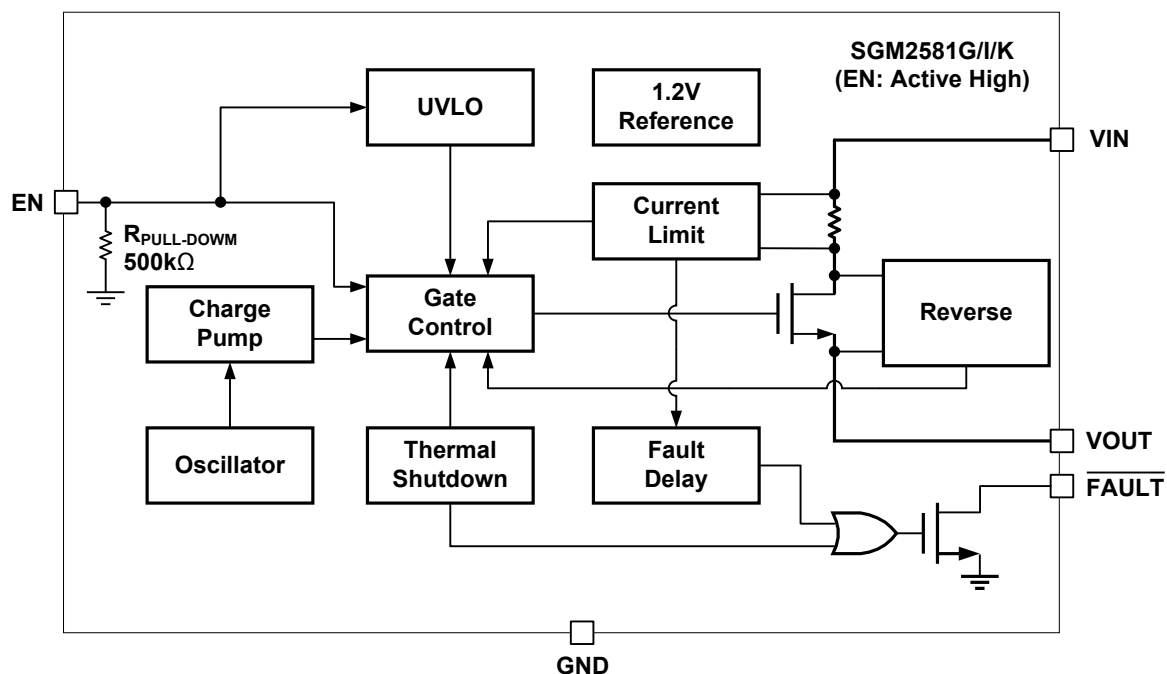


Figure 7. SGM2581G/I/K Block Diagram

FUNCTIONAL DESCRIPTION

Input and Output

VIN is the power supply connection to the logic circuitry and the drain of the MOSFET. VOUT is the source of the output MOSFET. In a typical circuit, current flows from VIN to VOUT toward the load. The output MOSFET and driver circuit are also designed to allow the MOSFET source to be externally forced to a higher voltage than the drain ($V_{OUT} > V_{IN}$) when the switch is disabled.

Thermal Shutdown

Thermal shutdown is employed to protect device and load from damage. It shuts off the output MOSFET and asserts the $\overline{\text{FAULT}}$ output, if the die temperature exceeds 150°C until the die temperature drops to 130°C.

Soft-Start

In order to eliminate the upstream voltage sag caused by the large inrush current during hot-plug events, the "soft-start" feature effectively isolates power supplies from such highly capacitive loads.

Under-Voltage Lockout (UVLO)

UVLO prevents the MOSFET switch from turning on until input voltage exceeds 2.15V (TYP). If input voltage drops below 2.05V (TYP), UVLO shuts off the MOSFET switch. Under-voltage detection functions only when the switch is enabled.

Current Limiting and Short Protection

The current limit circuit is designed to limit the output current to protect the upstream power supply. The typical current limit threshold is set internally to approximately 1.1A (SGM2581A/B/G), 2.1A (SGM2581C/D/I), 2.6A (SGM2581E/F/K). Under output short-circuit condition, the typical current limit folded back 75%. If SGM2581 keeps at over-current condition for a long time, the junction temperature may exceed 150°C, and over-temperature protection will shut down the output until temperature drops 130°C or limit (short) condition is removed.

Reverse-Voltage Protection

The reverse-voltage protection feature turns off the N-MOSFET switch whenever the output voltage exceeds the input voltage by 50mV (TYP). Its hysteresis voltage is 38mV (TYP).

Fault Flag ($\overline{\text{FAULT}}$)

The $\overline{\text{FAULT}}$ signal is an open-drain N-MOSFET output. $\overline{\text{FAULT}}$ is asserted (active low) when an over-current or thermal shutdown condition occurs. Figure 4 and Figure 5 depict typical timings.

In the case of an over-current condition, $\overline{\text{FAULT}}$ will be asserted only after the response delay time (t_D) has elapsed. This ensures that $\overline{\text{FAULT}}$ is asserted only upon valid over-current conditions and that erroneous error reporting is eliminated.

For example, false over-current conditions can occur during hot-plug events when a highly capacitive load is connected and causes a high transient inrush current that exceeds the current limit threshold for up to 1ms. The $\overline{\text{FAULT}}$ response delay time t_D is 13ms (TYP).

Power Dissipation

The device's junction temperature depends on several factors such as the load, PCB layout, ambient temperature, and package type. Equations that can be used to calculate power dissipation and junction temperature are found below:

$$P_D = R_{DS(ON)} \times I_{OUT}^2$$

To relate this to junction temperature, the following equation can be used:

$$T_J = P_D \times \theta_{JA} + T_A$$

where:

T_J = junction temperature

T_A = ambient temperature

θ_{JA} = the thermal resistance of the package

APPLICATION INFORMATION

Supply Filter Capacitor

In order to prevent the input voltage drooping during hot-plug events, connect a ceramic capacitor (C_{IN}) from VIN to GND. The C_{IN} is positioned close to VIN and GND of the device. However, higher capacitor values could reduce the voltage sag on the input further. Furthermore, an output short will cause ringing on the input without the input capacitor. It could destroy the internal circuitry when the input transient exceeds 6V which is the absolute maximum supply voltage even for a short duration.

If the upstream supply cable is long or the VIN transient exceeds 6V during the VOUT short, recommend adding a second filter capacitor (not less than 47 μ F) at the upstream supply output terminal.

Output Filter Capacitor

Between VOUT and GND, connect a low-ESR 10 μ F ceramic capacitor to meet the 330mV maximum drop requirement. Standard bypass methods should be used to minimize inductance and resistance between the bypass capacitor and the down-stream connector. This will reduce EMI and improve the transient performance. If long cables are connected to the output terminals, an anti-parallel schottky diode such as BAT54 is suggested to be placed in parallel with the output terminals to absorb the negative ringing due to the cable inductance.

PCB Layout Guide

For best performance of the SGM2581, the following guidelines must be strictly followed:

- Keep all V_{BUS} traces as short and wide as possible and use at least 2 ounce copper for all V_{BUS} traces.
- Place a ground plane under all circuitry to lower both resistance and inductance and improve DC and transient performance.
- Dual low-ESR 10 μ F ceramic capacitors between VOUT and GND, VIN and GND.
- Locate the output capacitor as close to the connectors as possible to lower impedance (mainly inductance) between the port and the capacitor and improve transient performance.
- Input and output capacitors should be placed closed to the IC and connected to ground plane to reduce noise coupling.
- Locate the ceramic bypass capacitors as close as possible to the VIN pin and VOUT pin of SGM2581.

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DECEMBER 2017 – REV.A.1 to REV.A.2

Update Feature section	1
------------------------------	---

APRIL 2016 – REV.A to REV.A.1



Changed Reverse-Voltage Protection section.....	10
---	----

Changes from Original (OCTOBER 2015) to REV.A



Changed from product preview to production data.....	All
--	-----

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

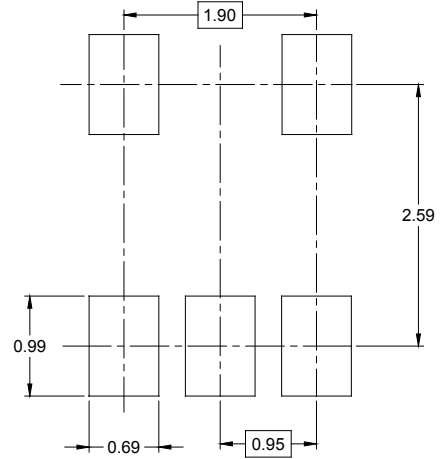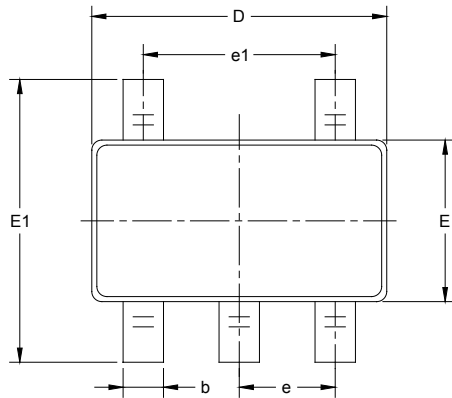

RECOMMENDED LAND PATTERN (Unit: mm)

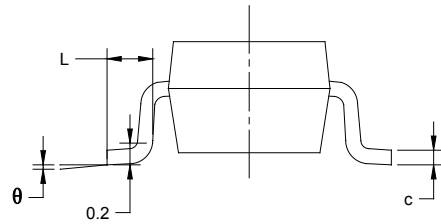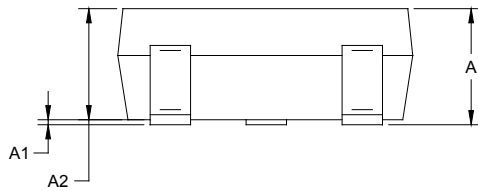


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

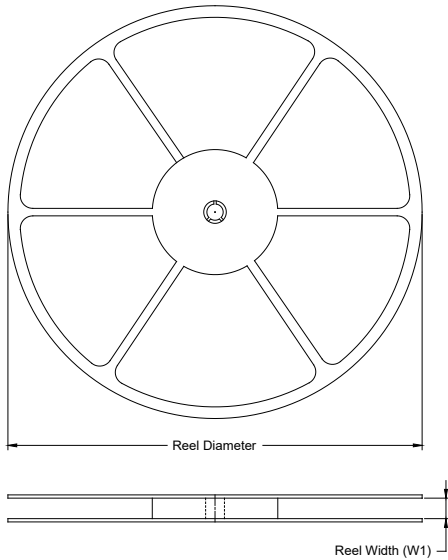

TAPE DIMENSIONS

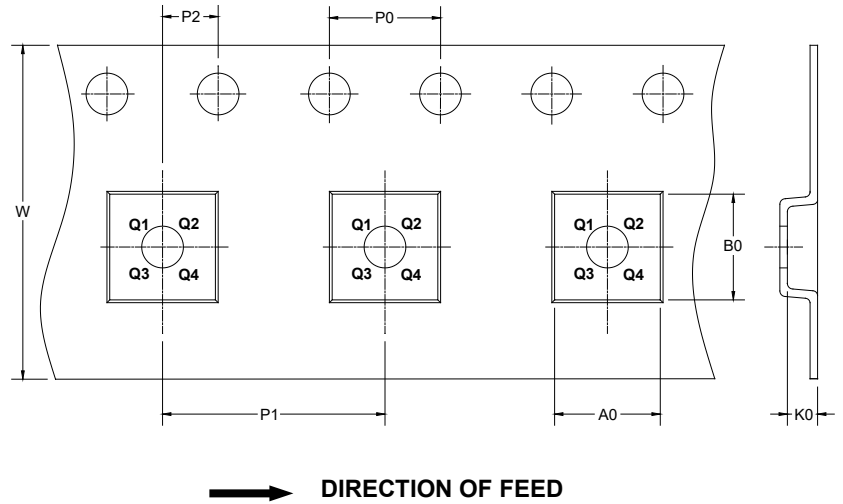

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002