



# SGM2018

## 1 $\mu$ A Ultra-Low Current Consumption and Low Dropout CMOS Voltage Regulators

### GENERAL DESCRIPTION

The SGM2018 series are positive voltage regulators with ultra-low current consumption, low dropout voltage, high-accuracy output voltage and 250mA output current, developed in CMOS technology.

Output capacitor as small as 0.1 $\mu$ F can be used. The SGM2018 series operate with an ultra-low current consumption and only 1 $\mu$ A typical current is consumed to prolong the battery run-time.

The built-in low on-resistance transistor realizes low dropout voltage and a large output current. A built-in over-current protection circuit prevents the load current from exceeding the current capacity of the output transistor. Reverse leakage current is 0.4 $\mu$ A (TYP) when  $V_{OUT} > V_{IN}$ .

Compared with voltage regulators using a conventional CMOS technology, more types of capacitors, including small input and output capacitors, can be used with the SGM2018 series. The SGM2018 series feature ultra-low current consumption and come in small packages, making them most suitable for portable equipment.

The SGM2018 series is available in Green SOT-23-5 and UTDFN-1 $\times$ 1-4AL packages. It operates over an operating temperature range of -40 $^{\circ}$ C to +85 $^{\circ}$ C.

### FEATURES

- **Fixed Output Voltage Versions:**  
1.8V, 2.8V, 3.0V and 3.3V
- **Input Voltage Range:** 1.7V to 5V
- **Output Voltage Accuracy:**  $\pm 1.2\%$  at +25 $^{\circ}$ C
- **Low Dropout Voltage:** 70mV (TYP) at 100mA
- **Ultra-Low Current Consumption:** 1 $\mu$ A (TYP)
- **250mA Nominal Output Current**
- **Low Reverse Leakage Current:**  
0.4 $\mu$ A (TYP) when  $V_{OUT} > V_{IN}$
- **Built-In Over-Temperature Protection**
- **Built-In Over-Current Protection Circuit**
- **Supports 1.8V Logic for EN Pin**
- **-40 $^{\circ}$ C to +85 $^{\circ}$ C Operating Temperature Range**
- **Available in Green SOT-23-5 and UTDFN-1 $\times$ 1-4AL Packages**

### APPLICATIONS

Wearable Device  
Smart Phone  
Portable Equipment


**PACKAGE/ORDERING INFORMATION**

| MODEL       | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER      | PACKAGE MARKING | PACKING OPTION       |
|-------------|---------------------|-----------------------------|----------------------|-----------------|----------------------|
| SGM2018-1.8 | SOT-23-5            | -40°C to +85°C              | SGM2018-1.8YN5G/TR   | CM1XX           | Tape and Reel, 3000  |
|             | UTDFN-1×1-4AL       | -40°C to +85°C              | SGM2018-1.8YUDH4G/TR | N3X             | Tape and Reel, 10000 |
| SGM2018-2.8 | SOT-23-5            | -40°C to +85°C              | SGM2018-2.8YN5G/TR   | CM2XX           | Tape and Reel, 3000  |
|             | UTDFN-1×1-4AL       | -40°C to +85°C              | SGM2018-2.8YUDH4G/TR | N4X             | Tape and Reel, 10000 |
| SGM2018-3.0 | SOT-23-5            | -40°C to +85°C              | SGM2018-3.0YN5G/TR   | CM3XX           | Tape and Reel, 3000  |
|             | UTDFN-1×1-4AL       | -40°C to +85°C              | SGM2018-3.0YUDH4G/TR | N5X             | Tape and Reel, 10000 |
| SGM2018-3.3 | SOT-23-5            | -40°C to +85°C              | SGM2018-3.3YN5G/TR   | CM4XX           | Tape and Reel, 3000  |
|             | UTDFN-1×1-4AL       | -40°C to +85°C              | SGM2018-3.3YUDH4G/TR | N6X             | Tape and Reel, 10000 |


**MARKING INFORMATION**

NOTE: X = Date Code. XX = Date Code.

**SOT-23-5**

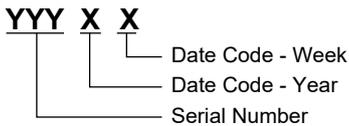

**UTDFN-1×1-4AL**

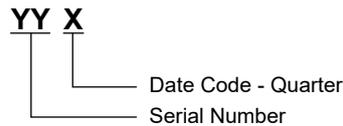

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

- IN to GND ..... -0.3V to 6V
- OUT to GND ..... -0.3V to 6V
- EN to GND..... -0.3V to 6V
- Package Thermal Resistance
- SOT-23-5,  $\theta_{JA}$  ..... 207°C/W
- UTDFN-1×1-4AL,  $\theta_{JA}$  ..... 238°C/W
- Junction Temperature ..... +150°C
- Storage Temperature Range ..... -65°C to +150°C
- Lead Temperature (Soldering, 10s) ..... +260°C
- ESD Susceptibility
- HBM..... 7000V
- CDM ..... 1000V

**RECOMMENDED OPERATING CONDITIONS**

- Input Voltage Range ..... 1.7V to 5V
- Operating Junction Temperature Range..... -40°C to +85°C
- Input Capacitance,  $C_{IN}$  ..... 1µF (MIN)
- Output Capacitance,  $C_{OUT}$  ..... 0.1µF to 10µF

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

**PIN CONFIGURATIONS**

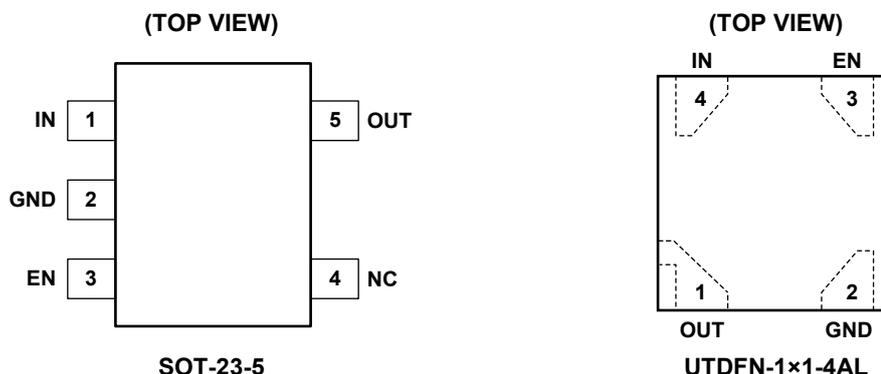

**PIN DESCRIPTION**

| PIN      |               | NAME | FUNCTION   |
|----------|---------------|------|--|
| SOT-23-5 | UTDFN-1x1-4AL |      |  |
| 1        | 4             | IN   | Input Voltage Supply Pin.  |
| 2        | 2             | GND  | Ground Pin.  |
| 3        | 3             | EN   | Enable Pin. This pin has an internal pull-down current source. A logic low disables the regulator. Connect to logic high for normal operation. |
| 4        | –             | NC   | Not Connected.   |
| 5        | 1             | OUT  | Output Voltage Pin. It is recommended to use output capacitor with effective capacitance in the range of 0.1µF to 10µF.                        |

**ELECTRICAL CHARACTERISTICS**

( $V_{IN} = V_{OUT(NOM)} + 1V$ ,  $I_{OUT} = 0.1mA$ ,  $V_{EN} = 5V$ ,  $C_{IN} = 1\mu F$  and  $C_{OUT} = 0.1\mu F$ ,  $T_J = -40^\circ C$  to  $+85^\circ C$ , typical values are at  $T_J = +25^\circ C$ , unless otherwise noted.)







| PARAMETER   | SYMBOL  | CONDITIONS  | TEMP                           | MIN           | TYP   | MAX  | UNITS           |
|---|---|---|--------------------------------|---------------|-------|------|-----------------|
| Input Voltage Range                                   | $V_{IN}$  |   | $-40^\circ C$ to $+85^\circ C$ | 1.7           |       | 5    | V               |
| Output Voltage Accuracy                               | $V_{OUT}$   | $V_{IN} = (V_{OUT(NOM)} + 1V)$ to 5V  | $+25^\circ C$                  | -1.2          |       | 1.2  | %               |
| Maximum Output Current <sup>(1)</sup>                 |   |   | $+25^\circ C$                  | 250           |       |      | mA              |
| Current Limit   | $I_{LIM}$   |   | $+25^\circ C$                  | 280           | 480   |      | mA              |
| Supply Pin Current                                    | $I_Q$   | No load   | $-40^\circ C$ to $+85^\circ C$ |               | 1.0   | 1.5  | µA              |
| Dropout Voltage <sup>(2)</sup>                        | $V_{DROP}$  | $I_{OUT} = 100mA$ ,<br>SOT-23-5   | $V_{OUT(NOM)} = 1.8V$          | $+25^\circ C$ | 145   | 200  | mV              |
|   |   |   | $V_{OUT(NOM)} = 2.8V$          | $+25^\circ C$ | 95    | 130  |                 |
|   |   |   | $V_{OUT(NOM)} = 3.0V$          | $+25^\circ C$ | 90    | 130  |                 |
|   |   |   | $V_{OUT(NOM)} = 3.3V$          | $+25^\circ C$ | 85    | 110  |                 |
|   |   | $I_{OUT} = 100mA$ ,<br>UTDFN-1×1-4AL  | $V_{OUT(NOM)} = 1.8V$          | $+25^\circ C$ | 130   | 175  | mV              |
|   |   |   | $V_{OUT(NOM)} = 2.8V$          | $+25^\circ C$ | 80    | 110  |                 |
|   |   |   | $V_{OUT(NOM)} = 3.0V$          | $+25^\circ C$ | 75    | 110  |                 |
|   |   |   | $V_{OUT(NOM)} = 3.3V$          | $+25^\circ C$ | 70    | 90   |                 |
| Line Regulation                                       | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $V_{IN} = (V_{OUT(NOM)} + 1V)$ to 5V  | $+25^\circ C$                  |               | 0.015 | 0.25 | %/V             |
| Load Regulation                                       | $\Delta V_{OUT}$                                      | $I_{OUT} = 0.1mA$ to 250mA  | $+25^\circ C$                  |               | 3     | 15   | mV              |
| Short Current Limit                                   | $I_{SHORT}$   | $V_{OUT} = 0V$  | $+25^\circ C$                  |               | 100   |      | mA              |
| Reverse Leakage Current                               | $I_{RL}$  | $V_{IN} = 1.7V$ , $V_{OUT} = 5.5V$  | $+25^\circ C$                  |               | 0.4   |      | µA              |
| Power Supply Rejection Ratio                          | PSRR  | $I_{OUT} = 30mA$ ,<br>$V_{OUT(NOM)} = 1.8V$ ,<br>$\Delta V_{RIPPLE} = 0.2V_{P-P}$ | $f = 217Hz$                    | $+25^\circ C$ |       | 38   | dB              |
|   |   |   | $f = 1kHz$                     | $+25^\circ C$ |       | 27   |                 |
| Output Voltage Temperature Coefficient <sup>(3)</sup> | $\frac{\Delta V_{OUT}}{\Delta T_J \times V_{OUT}}$    |   | $-40^\circ C$ to $+85^\circ C$ |               | 10    |      | ppm/ $^\circ C$ |
| <b>Shutdown</b>                                       |   |   |                                |               |       |      |                 |
| EN Input Threshold                                    | $V_{IH}$  | $V_{IN} = 1.7V$ to 5V   | $-40^\circ C$ to $+85^\circ C$ | 1.4           |       |      | V               |
|   | $V_{IL}$  |   | $-40^\circ C$ to $+85^\circ C$ |               |       | 0.4  |                 |
| EN Input Bias Current                                 | $I_{BH}$  | $V_{EN} = 5.5V$   | $-40^\circ C$ to $+85^\circ C$ |               | 25    | 500  | nA              |
|   | $I_{BL}$  | $V_{EN} = 0V$   | $-40^\circ C$ to $+85^\circ C$ | -500          |       | 500  |                 |
| Shutdown Supply Current                               | $I_{SHDN}$  | $V_{IN} = 5V$ , $V_{EN} = 0V$   | $+25^\circ C$                  |               | 0.15  | 0.3  | µA              |
|   |   |   | $-40^\circ C$ to $+85^\circ C$ |               |       | 0.65 |                 |
| Output Discharge Resistance                           | $R_{DISCH}$   | $V_{EN} = 0V$ , $V_{OUT} = 0.5V$  | $+25^\circ C$                  |               | 50    |      | Ω               |
| Thermal Shutdown Temperature                          | $T_{SHDN}$  |   |                                |               | 165   |      | $^\circ C$      |
| Thermal Shutdown Hysteresis                           | $\Delta T_{SHDN}$                                     |   |                                |               | 30    |      | $^\circ C$      |

## NOTES:

- Maximum output current is affected by the PCB layout, size of metal trace, the thermal conduction path between metal layers, ambient temperature and the other environment factors of system. Attention should be paid to the dropout voltage when  $V_{IN} < (V_{OUT} + V_{DROP})$ .
- Dropout voltage is characterized when  $V_{OUT}$  falls 5% below  $V_{OUT(NOM)}$ .
- Output voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.







TYPICAL PERFORMANCE CHARACTERISTICS

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{V}$ ,  $V_{OUT(NOM)} = 1.8\text{V}$ ,  $V_{EN} = 5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.1\mu\text{F}$ , unless otherwise noted.

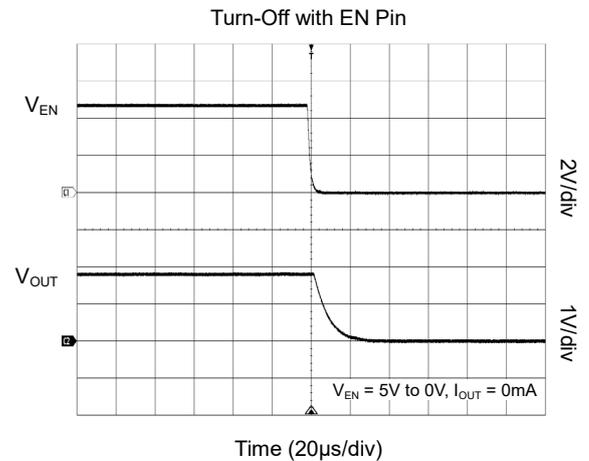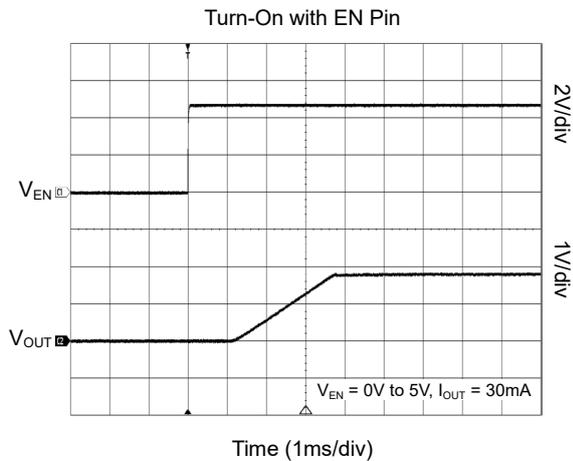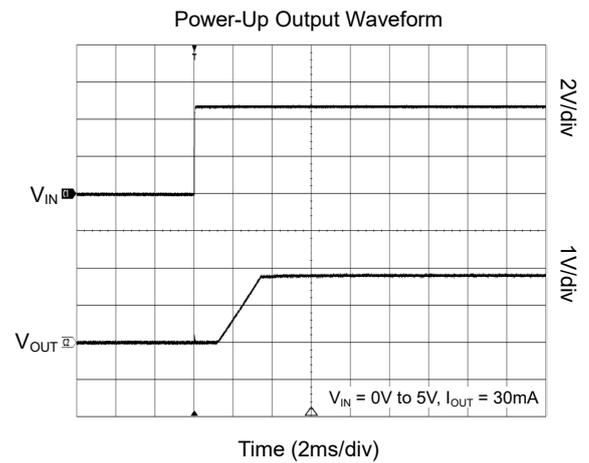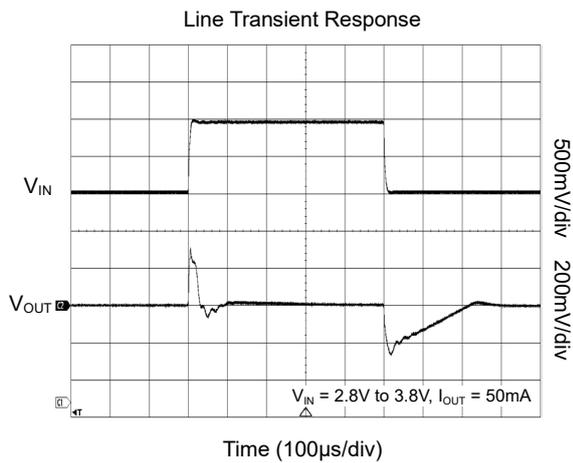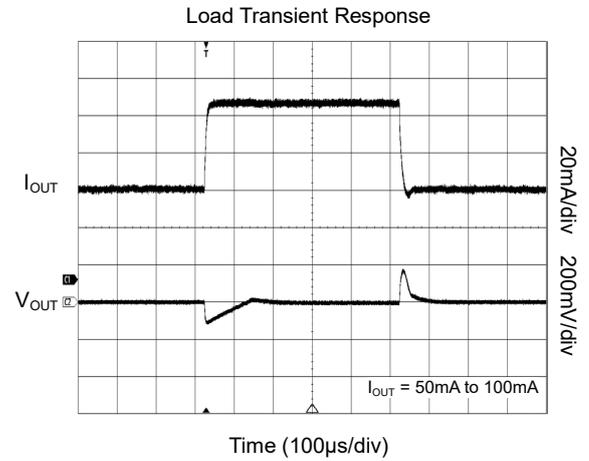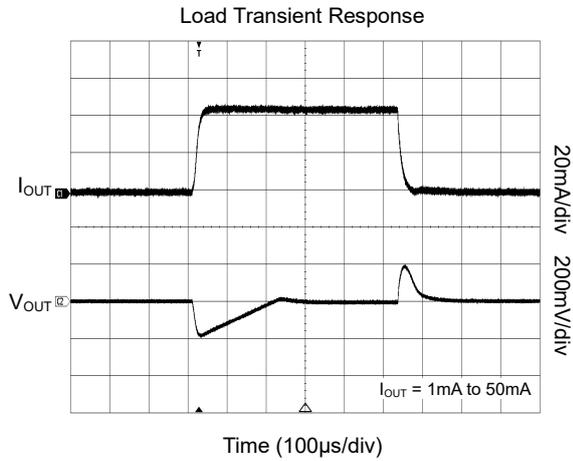



TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{V}$ ,  $V_{OUT(NOM)} = 1.8\text{V}$ ,  $V_{EN} = 5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.1\mu\text{F}$ , unless otherwise noted.

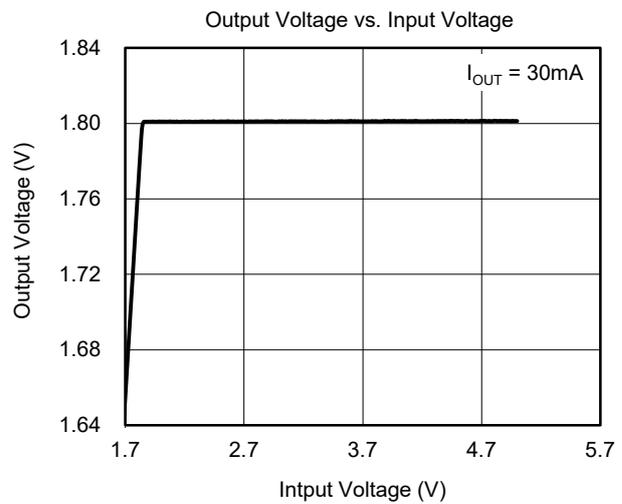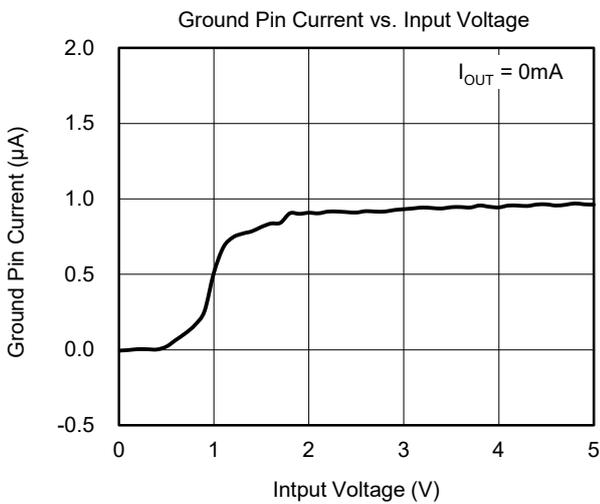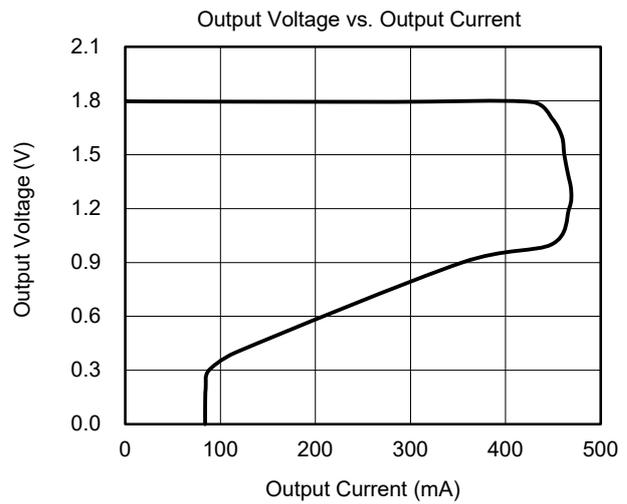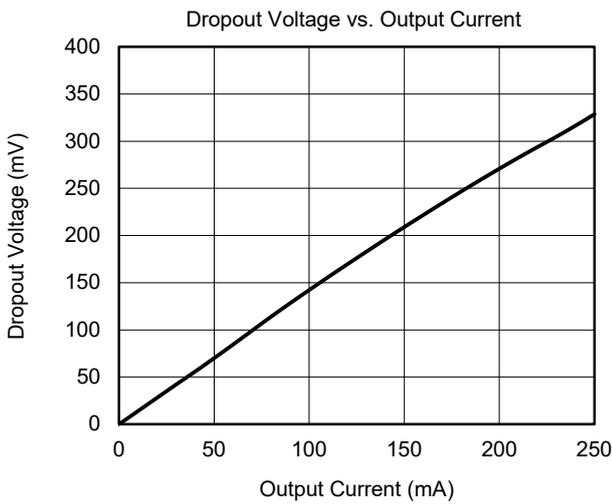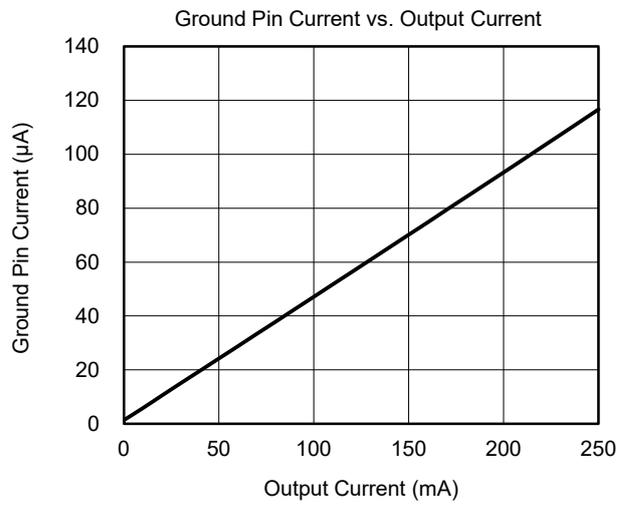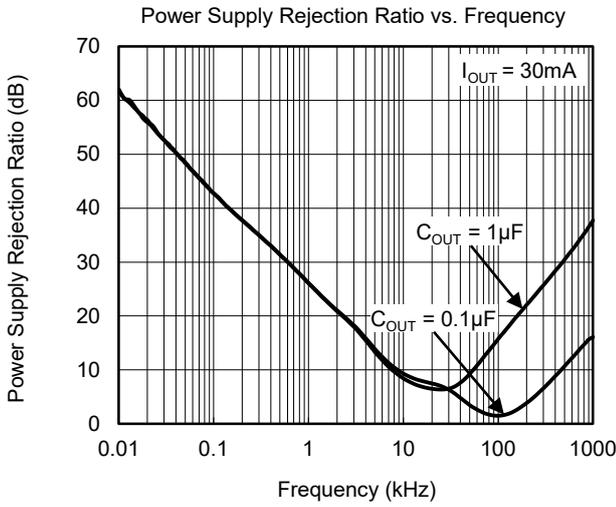

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{V}$ ,  $V_{OUT(NOM)} = 1.8\text{V}$ ,  $V_{EN} = 5\text{V}$ ,  $C_{IN} = 1\mu\text{F}$  and  $C_{OUT} = 0.1\mu\text{F}$ , unless otherwise noted.

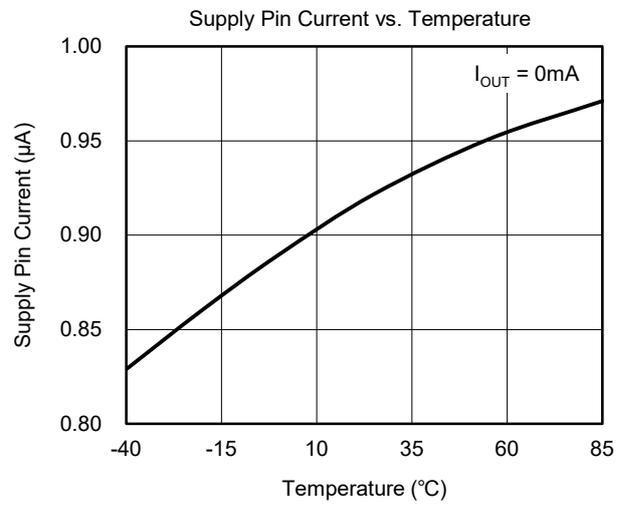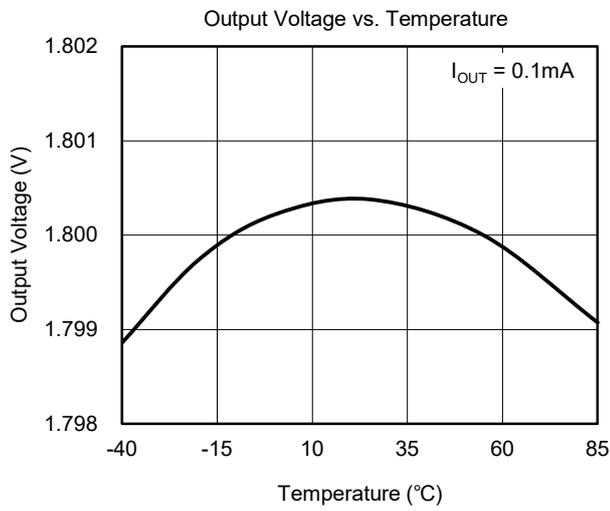

FUNCTIONAL BLOCK DIAGRAM

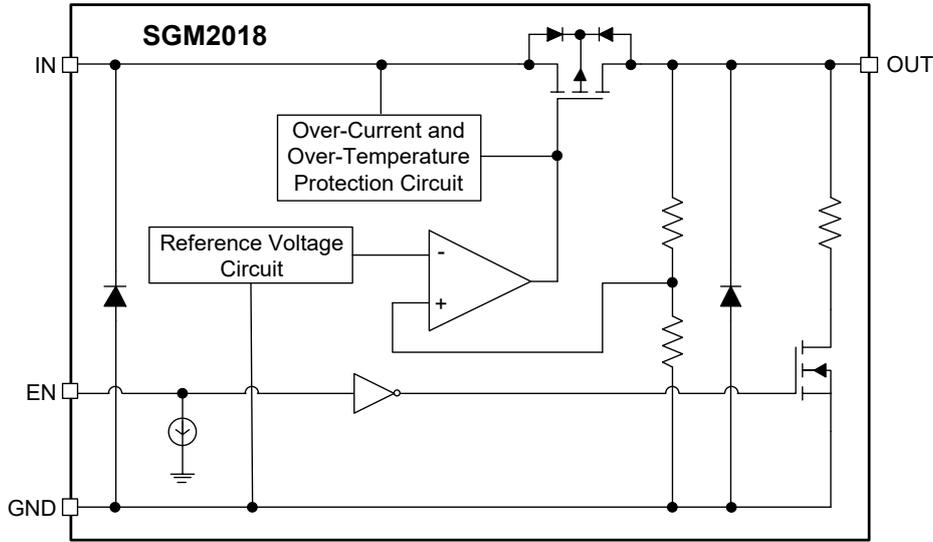


Figure 1. Block Diagram

APPLICATION INFORMATION

Application Circuit

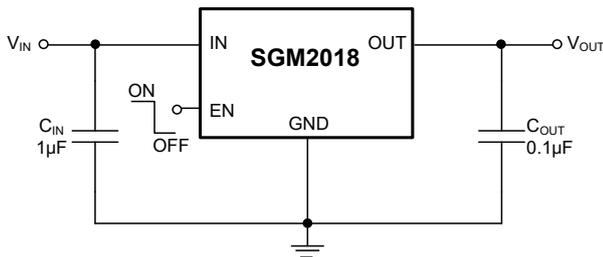


Figure 2. Application Circuit

Conditions of Application

Input Capacitor (C<sub>IN</sub>): 1µF or higher

Output Capacitor (C<sub>OUT</sub>): 0.1µF or higher

Caution: Generally regulator may oscillate depending on the selection of external components.

Confirm that no oscillation occurs in the application for which the above capacitors are used.

Selection of Input and Output Capacitors

The SGM2018 series require an output capacitor (C<sub>OUT</sub>) between the OUT pin and GND pin for phase compensation.

Operation is stable with a ceramic capacitor of 0.1µF or higher in the entire temperature range. When using an OS capacitor, a tantalum capacitor, or an aluminum

electrolytic capacitor, the capacitance must be 0.1µF or higher.

The value of the output overshoot or undershoot transient response varies depending on the value of the output capacitor.

The required capacitance of the input capacitor (C<sub>IN</sub>) differs depending on the application.

The recommended value for an application is C<sub>IN</sub> ≥ 1µF, C<sub>OUT</sub> ≥ 0.1µF; however, when selecting these capacitors, perform sufficient evaluation, including evaluation of temperature characteristics, on the actual device.

The SGM2018 series enable use of a low equivalent series resistance capacitor, such as a ceramic capacitor, for the output-side capacitor (C<sub>OUT</sub>).

Over-Current Protection Circuit

The SGM2018 series include an over-current protection circuit having the characteristics shown in the table of Electrical Characteristics, in order to protect the output transistor against an excessive output current and short circuiting between the OUT and GND pins. The current when the output pin is short-circuited (I<sub>SHORT</sub>) is internally set at approximately 100mA (TYP), and the normal value is restored for the output voltage, if the short circuit condition is released.

**REVISION HISTORY**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

|   |             |
|---|-------------|
| <b>JUNE 2020 – REV.A to REV.A.1</b> .....     | <b>Page</b> |
| Updated Absolute Maximum Ratings section..... | 2           |



---

|  |             |
|--|-------------|
| <b>Changes from Original (JANUARY 2020) to REV.A</b> ..... | <b>Page</b> |
| Changed from product preview to production data.....       | All         |



---

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

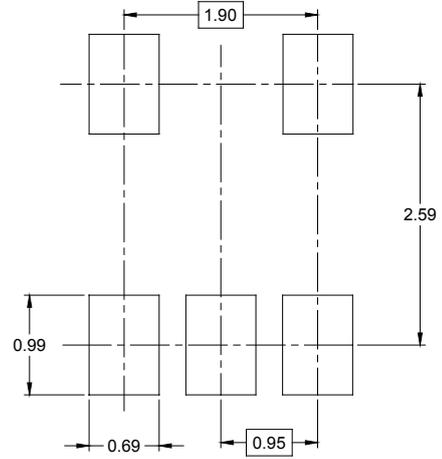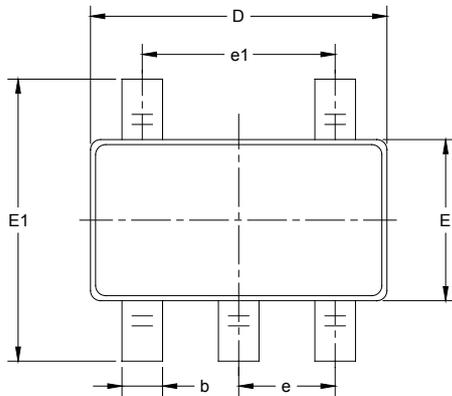


RECOMMENDED LAND PATTERN (Unit: mm)

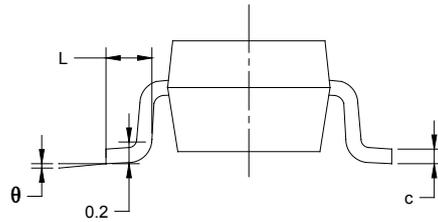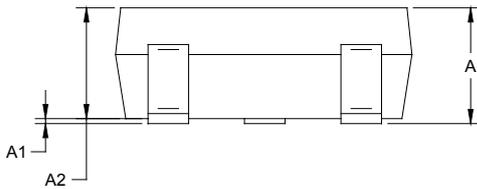


| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 1.050                        | 1.250 | 0.041                   | 0.049 |
| A1       | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2       | 1.050                        | 1.150 | 0.041                   | 0.045 |
| b        | 0.300                        | 0.500 | 0.012                   | 0.020 |
| c        | 0.100                        | 0.200 | 0.004                   | 0.008 |
| D        | 2.820                        | 3.020 | 0.111                   | 0.119 |
| E        | 1.500                        | 1.700 | 0.059                   | 0.067 |
| E1       | 2.650                        | 2.950 | 0.104                   | 0.116 |
| e        | 0.950 BSC                    |       | 0.037 BSC               |       |
| e1       | 1.900 BSC                    |       | 0.075 BSC               |       |
| L        | 0.300                        | 0.600 | 0.012                   | 0.024 |
| $\theta$ | 0°                           | 8°    | 0°                      | 8°    |

PACKAGE OUTLINE DIMENSIONS


UTDFN-1x1-4AL

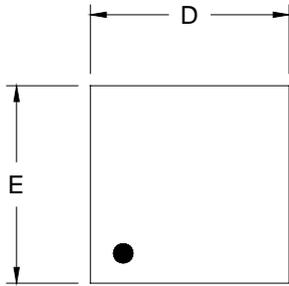


TOP VIEW

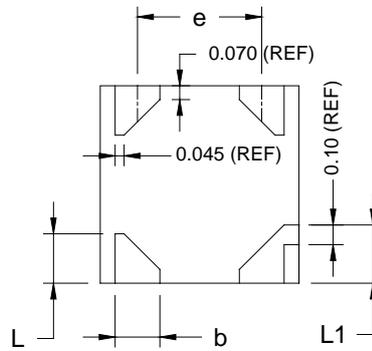

BOTTOM VIEW

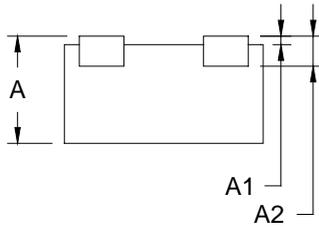

SIDE VIEW

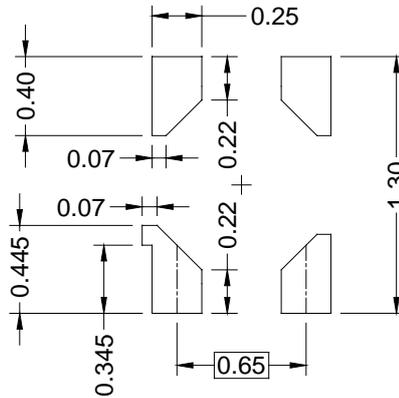


RECOMMENDED LAND PATTERN (Unit: mm)


| Symbol | Dimensions In Millimeters |       |       |
|--------|---------------------------|-------|-------|
|        | MIN                       | MOD   | MAX   |
| A      | 0.500                     | 0.550 | 0.600 |
| A1     | 0.000                     |       | 0.050 |
| A2     | 0.152 REF                 |       |       |
| e      | 0.625 BSC                 |       |       |
| D      | 0.950                     | 1.000 | 1.050 |
| E      | 0.950                     | 1.000 | 1.050 |
| b      | 0.175                     | 0.225 | 0.275 |
| L      | 0.200                     | 0.250 | 0.300 |
| L1     | 0.245                     | 0.295 | 0.345 |

**TAPE AND REEL INFORMATION**

**REEL DIMENSIONS**

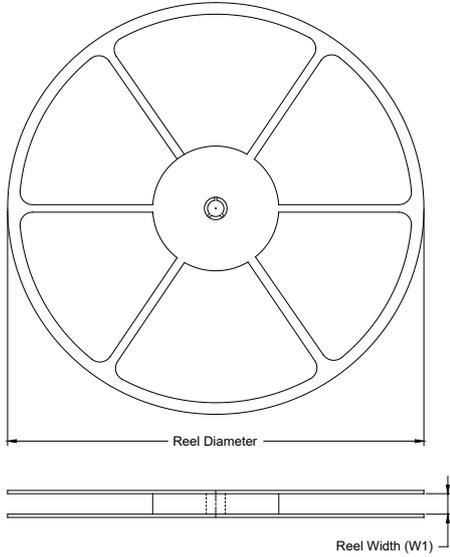

**TAPE DIMENSIONS**

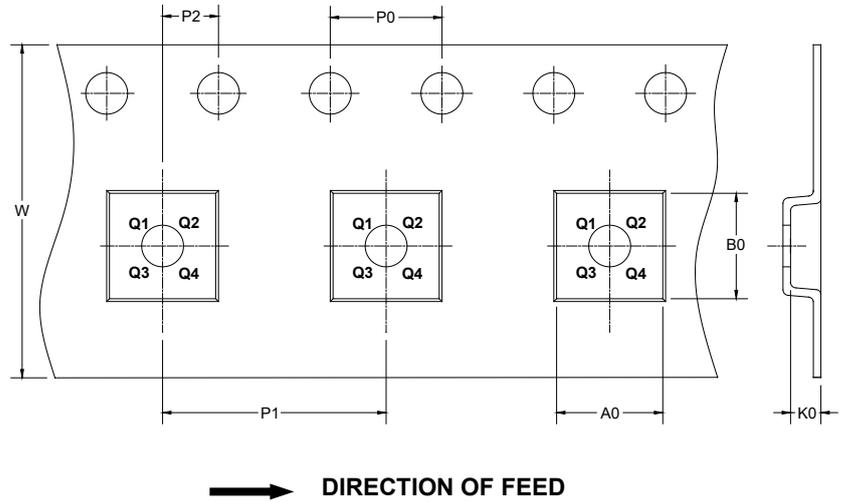

NOTE: The picture is only for reference. Please make the object as the standard.

**KEY PARAMETER LIST OF TAPE AND REEL**

| Package Type  | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|---------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOT-23-5      | 7"            | 9.5                | 3.20    | 3.20    | 1.40    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |
| UTDFN-1×1-4AL | 7"            | 9.0                | 1.18    | 1.18    | 0.68    | 4.0     | 2.0     | 2.0     | 8.0    | Q1            |

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

| Reel Type   | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368         | 227        | 224         | 8            |
| 7"          | 442         | 410        | 224         | 18           |

DD0002