

GENERAL DESCRIPTION

The SGMNM12330 is a power MOSFET with low gate charge and a low on-state resistance. This feature makes it a good choice for load switches and PWM applications.

FEATURES

- High Power and Current Handling Capability
- Low On-State Resistance
- Low Total Gate Charge and Capacitance Losses
- RoHS Compliant and Halogen Free

APPLICATIONS

PWM Applications

Power Load Switch

Battery Management

Wireless Chargers

ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	VALUE	UNITS
Drain-to-Source Voltage	V_{DS}	30	V
Gate-to-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current (DC)	I_D	10	A
Continuous Drain Current (Pulse)	I_D	40	A
Total Dissipation	P_D	2.4	W
Avalanche Current	I_{AS}	26	A
Avalanche Energy	E_{AS}	33.8	mJ
Junction Temperature	T_J	+150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Lead Temperature (Soldering, 10s)		+260	°C

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability.


PRODUCT SUMMARY

$R_{DS(ON)}$ (TYP)	$R_{DS(ON)}$ (MAX)	I_D (MAX)
9m Ω	11.5m Ω	10A

PIN CONFIGURATIONS

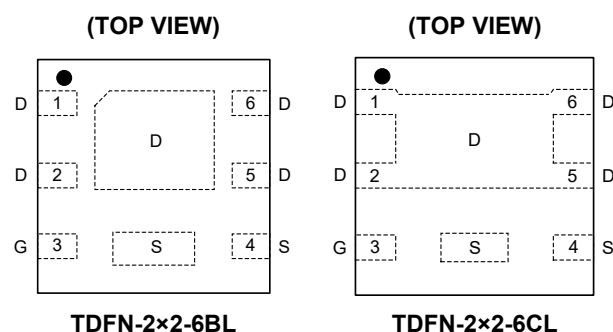

EQUIVALENT CIRCUIT

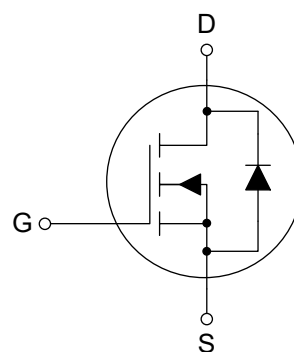

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGMNM12330	TDFN-2×2-6BL	-55°C to +150°C	SGMNM12330TTEN6G/TR	SZN XXXX	Tape and Reel, 3000
	TDFN-2×2-6CL	-55°C to +150°C	SGMNM12330TTEO6G/TR	SZP XXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXX = Date Code, Trace Code and Vendor Code.

YYY— Serial Number
XXXX
└── Vendor Code
└── Trace Code
└── Date Code - Year

Green (RoHS & HF): SG Micro Corp defines "Green" to mean RoHS Compliant and Halogen Free.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

THERMAL RESISTANCE MAXIMUM RATINGS







PARAMETER	SYMBOL	VALUE	UNITS
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	56	°C/W

ELECTRICAL CHARACTERISTICS



(T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Static OFF Characteristics						
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 250\mu A, V_{GS} = 0V$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$			1	μA
Gate-to-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Static ON Characteristics						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS} = V_{DS}, I_D = 250\mu A$	1	1.5	2.0	V
Drain-to-Source On-State Resistance	$R_{DS(ON)}$	$I_D = 9A, V_{GS} = 10V$		9	11.5	m Ω
		$I_D = 7A, V_{GS} = 4.5V$		11	14.3	
Forward Transconductance	g_{FS}	$V_{DS} = 5V, I_D = 9A$		16		S
Gate Resistance	R_G	$V_{GS} = 0V, V_{DS} = 0V, f = 1MHz$		1.0		Ω
Diode Characteristics						
Diode Forward Voltage	$V_{F(SD)}$	$V_{GS} = 0V, I_S = 1A$		0.7	1.2	V
Reverse Recovery Time	t_{RR}	$I_S = 5A, V_{GS} = 0V, di/dt = 100A/\mu s$		16.7		ns
Reverse Recovery Charge	Q_{RR}			7.5		nC
Dynamic Characteristics						
Input Capacitance	C_{ISS}	$V_{DS} = 15V, V_{GS} = 0V, f = 1MHz$		1629		pF
Output Capacitance	C_{OSS}			191		
Reverse Transfer Capacitance	C_{RSS}			160		
Total Gate Charge	Q_G	$V_{DS} = 15V, V_{GS} = 10V, I_D = 6A$		33.9		nC
Gate-to-Source Charge	Q_{GS}			5.8		
Gate-to-Drain Charge	Q_{GD}			6		
Switch Characteristics						
Turn-On Delay Time	$t_{D(ON)}$	$V_{DS} = 15V, V_{GS} = 10V, I_D = 5A, R_G = 3\Omega$		11.2		ns
Rise Time	t_R			3.5		
Turn-Off Delay Time	$t_{D(OFF)}$			42.3		
Fall Time	t_F			4.4		

TYPICAL PERFORMANCE CHARACTERISTICS

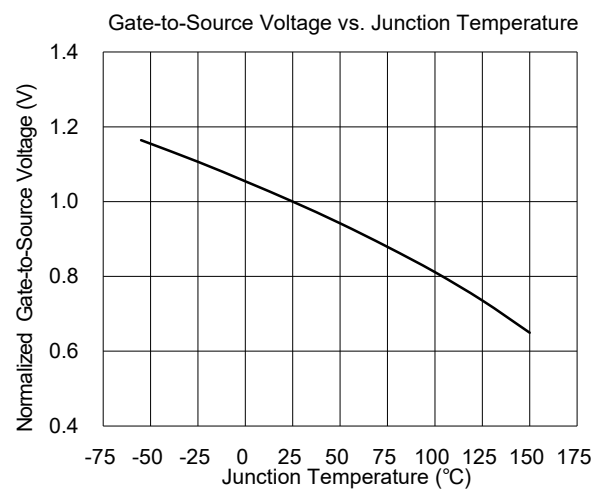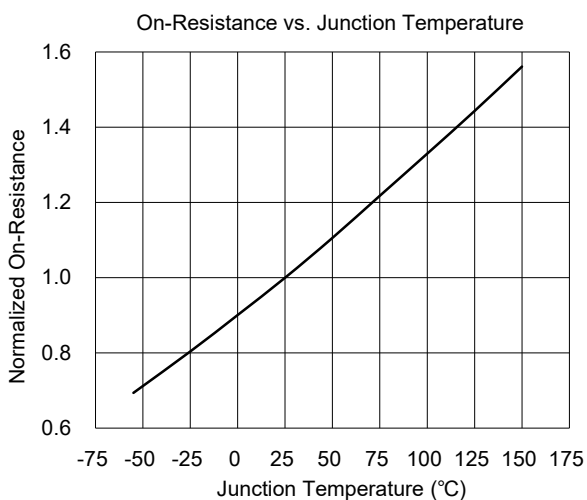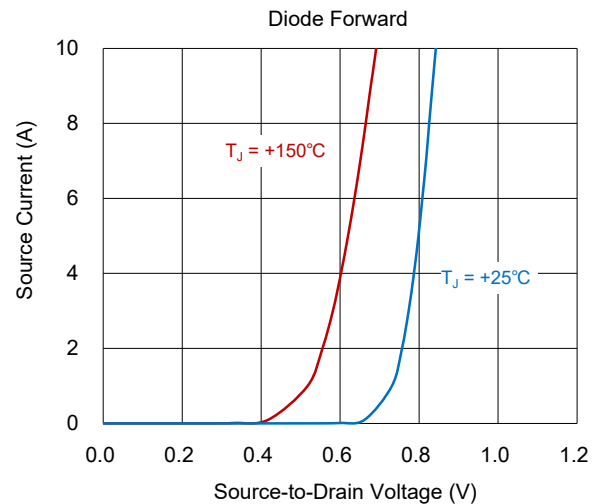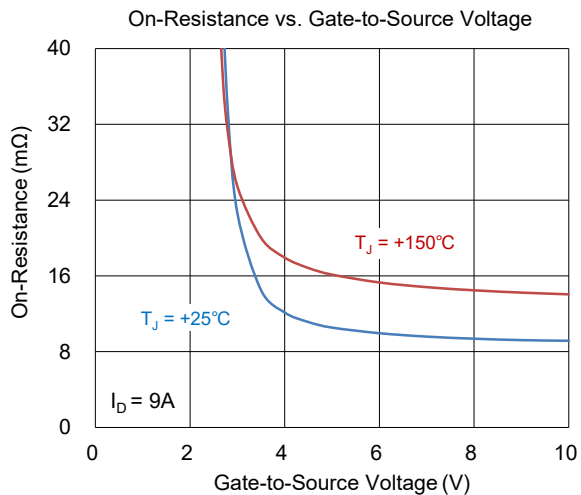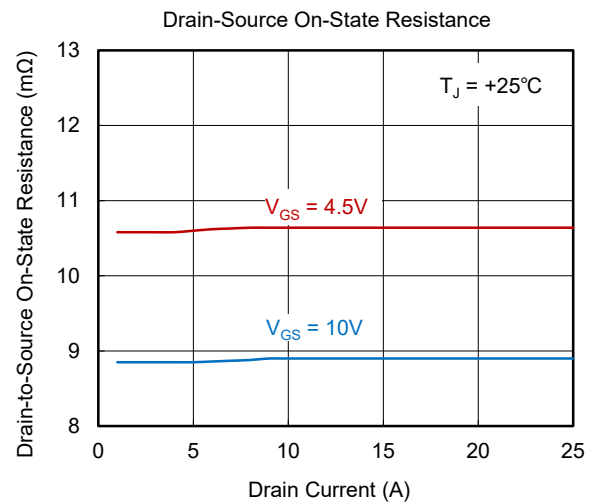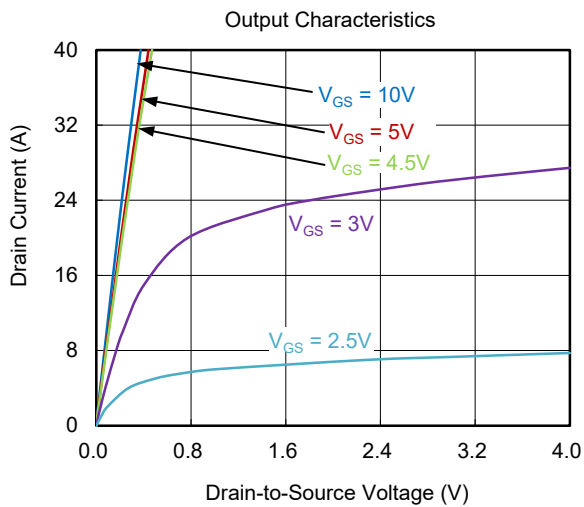

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

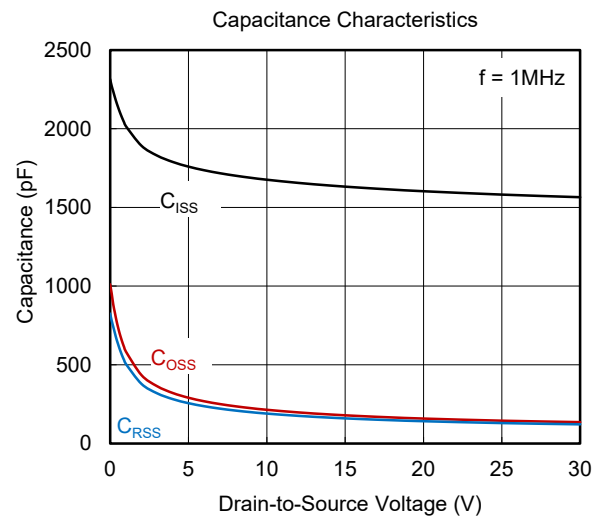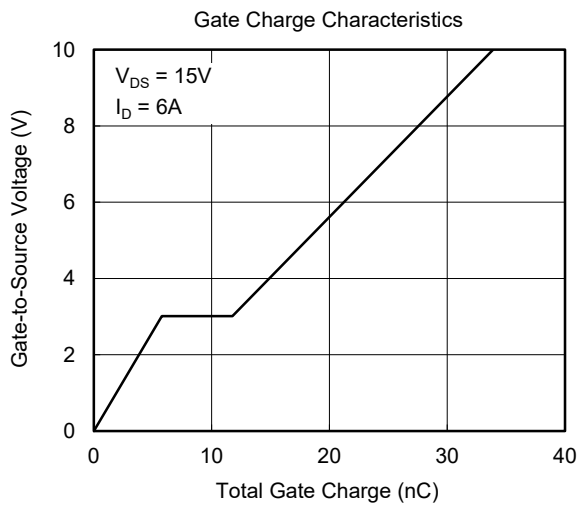

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Original (OCTOBER 2022) to REV.A

Page

Changed from product preview to production dataAll

PACKAGE OUTLINE DIMENSIONS

TDFN-2x2-6BL

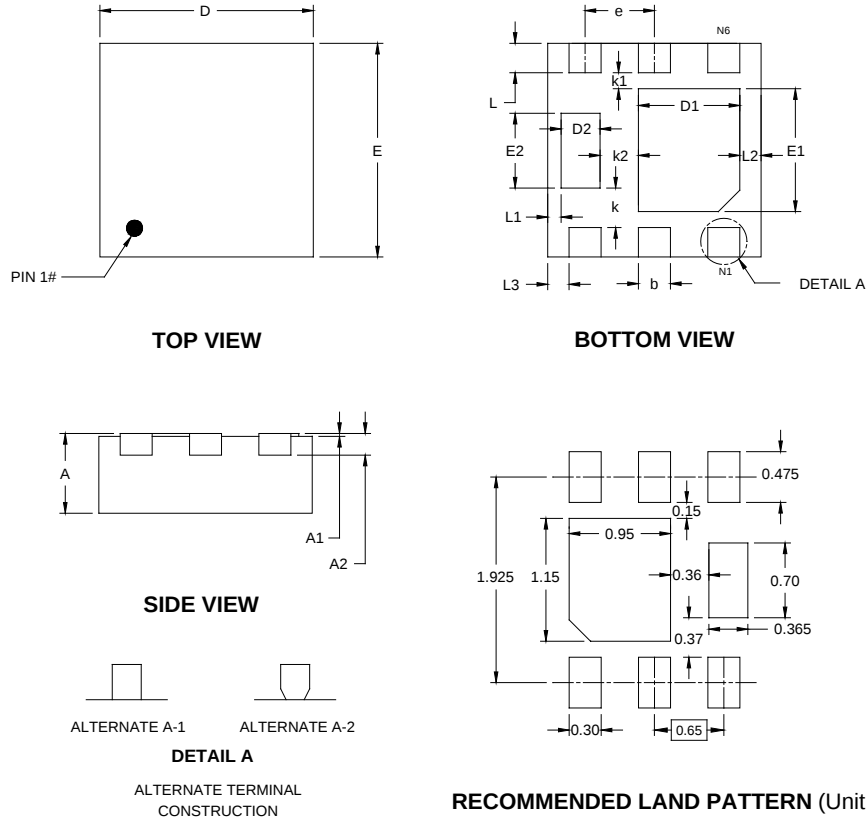


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	0.750	0.800
A1	0.000	0.020	0.050
A2	0.200 REF		
b	0.250	0.300	0.350
D	1.900	2.000	2.100
E	1.900	2.000	2.100
D1	0.850	0.950	1.050
E1	1.050	1.150	1.250
D2	0.315	0.365	0.415
E2	0.650	0.700	0.750
e	0.650 BSC		
k	0.370 REF		
k1	0.150 REF		
k2	0.360 REF		
L	0.225	0.275	0.325
L1	0.125 REF		
L2	0.200 REF		
L3	0.200 REF		

NOTE: This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

TDFN-2x2-6CL

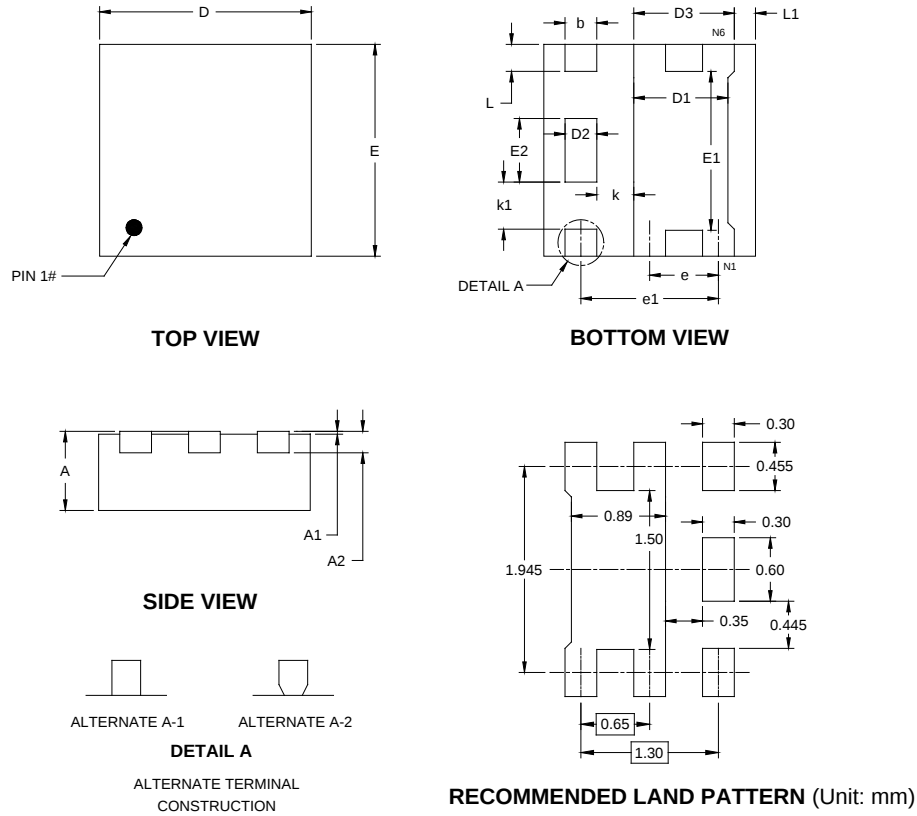


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	0.750	0.800
A1	0.000	0.020	0.050
A2	0.200 REF		
b	0.250	0.300	0.350
D	1.900	2.000	2.100
E	1.900	2.000	2.100
D1	0.790	0.890	0.990
E1	1.400	1.500	1.600
D2	0.200	0.300	0.400
E2	0.500	0.600	0.700
D3	0.950 REF		
e	0.650 BSC		
e1	1.300 BSC		
k	0.350 REF		
k1	0.445 REF		
L	0.180	0.255	0.355
L1	0.200 REF		

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

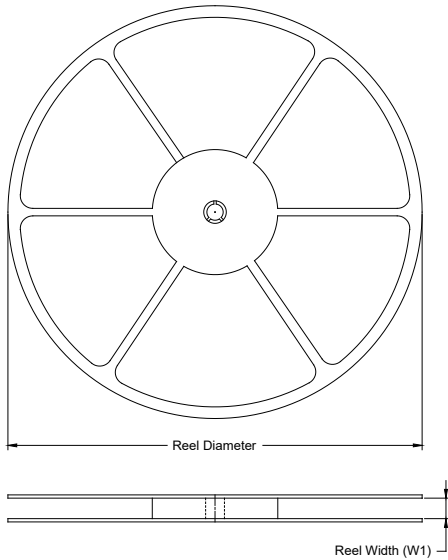

TAPE DIMENSIONS

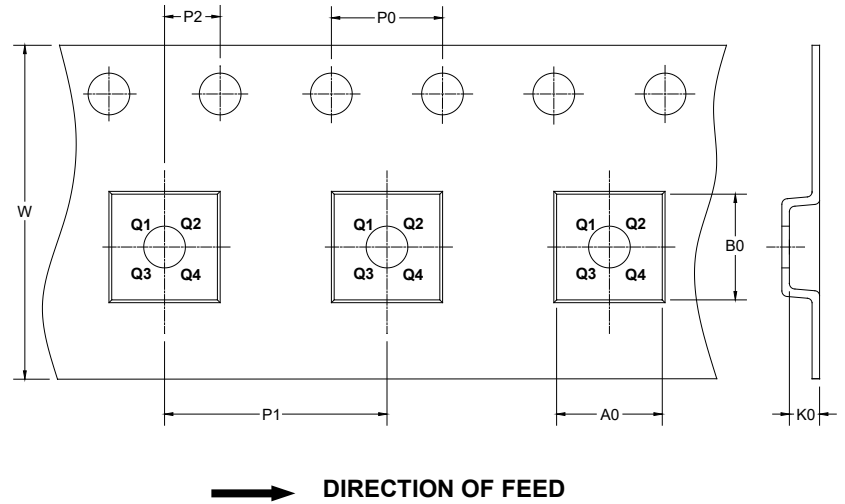

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TDFN-2×2-6BL	7"	9.5	2.30	2.30	1.00	4.0	4.0	2.0	8.0	Q1
TDFN-2×2-6CL	7"	9.5	2.30	2.30	1.00	4.0	4.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

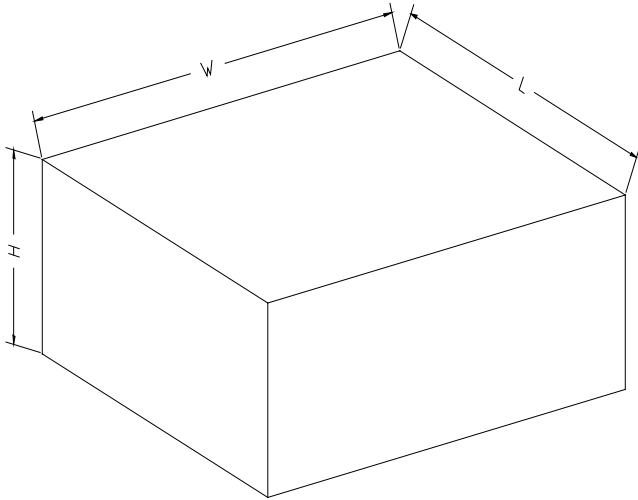

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002