

GENERAL DESCRIPTION

The SGM13002A is a low noise amplifier (LNA) for GLONASS Galileo, Beidou and GPS applications. The device delivers 17.4dB gain at an extremely low noise figure of 0.78dB. It also features high gain and excellent linearity performance that operates from 1160MHz to 1300MHz and 1550MHz to 1615MHz.

The device requires 5.2mA from a single 1.5V to 3.6V supply, dropping to below 1 μ A in power down mode.

No external DC blocking capacitors are required on the RF paths as long as no external DC voltage is applied, which can save PCB area and cost.

The SGM13002A is available in a Green UTDFN-1.1×0.7-6L package.

APPLICATIONS

GPS Chip Module

Personal Navigation Device (PND)

Cell Phone with GPS

MID/PAD with GPS

FEATURES

- **High Gain:**
 - 17.8dB at 1176.45MHz
 - 18.0dB at 1227.60MHz
 - 17.4dB at 1575.42MHz
- **Low Noise Figure:**
 - 0.71dB at 1176.45MHz
 - 0.70dB at 1227.60MHz
 - 0.78dB at 1575.42MHz
- **Low Operation Current: 5.2mA**
- **Current Less than 1 μ A in Power Down Mode**
- **Operating Frequency Range:**
 - 1160MHz to 1300MHz
 - 1550MHz to 1615MHz
- **Single Supply Voltage Range: 1.5V to 3.6V**
- **Low Cost BOM**
- **Lead-Free and RoHS Compliant**
- **Available in a Green UTDFN-1.1×0.7-6L Package**

BLOCK DIAGRAM

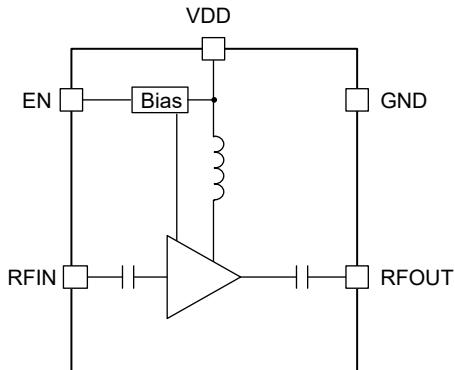


Figure 1. SGM13002A Block Diagram

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM13002A	UTDFN-1.1x0.7-6L	-40°C to +85°C	SGM13002AYUEC6G/TR	6H	Tape and Reel, 10000

MARKING INFORMATION

NOTE: Fixed character for 6H.

YY

Serial Number

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{DD}	-0.3V to 4.0V
EN to GND.....	-0.3V to 4.0V
RFIN, RFOUT to GND.....	-0.3V to 0.3V
RF Input Power, P_{IN}	10dBm
Junction Temperature.....	+150°C
Storage Temperature Range	-55°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	1500V
CDM	2000V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range	-40°C to +85°C
Supply Voltage, V_{DD}	1.5V to 3.6V
Operating Frequency Range,	
f_0	1160MHz to 1300MHz
f_0'	1550MHz to 1615MHz
Control Voltage High, V_{CTL_H}	1.35V to V_{DD}
Control Voltage Low, V_{CTL_L}	0V to 0.45V

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

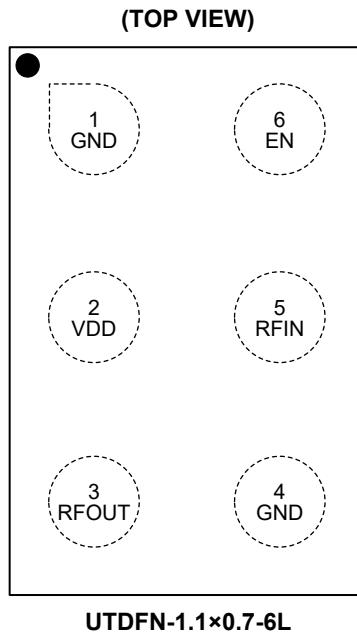

PIN DESCRIPTION

PIN	NAME	FUNCTION
1, 4	GND	Ground.
2	VDD	Power Supply.
3	RFOUT	LNA Output.
5	RFIN	LNA Input from Antenna.
6	EN	Active High Enable Input for the Device. Pull high enable, pull low into power down mode.

ELECTRICAL CHARACTERISTICS

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0 = 1160MHz to 1300MHz, typical values are at V_{DD} = 2.8V, T_A = +25°C, f_0 = 1176.45MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0	None	1160	1176.45	1300	MHz
Power Gain	S21			17.8		dB
Noise Figure	NF			0.71		dB
Input Return Loss	S11			-6.9		dB
Output Return Loss	S22			-6.2		dB
Reverse Isolation	S12			-31.5		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1176.45MHz		-11.7		dBm
Input In-Band IP3	IIP3_inb	$f_1 = 1175.45\text{MHz}$, $f_2 = 1176.45\text{MHz}$, -30dBm		-6.0		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		1.7		µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		117		ns

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0 = 1160MHz to 1300MHz, typical values are at V_{DD} = 1.8V, T_A = +25°C, f_0 = 1176.45MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0	None	1160	1176.45	1300	MHz
Power Gain	S21			17.8		dB
Noise Figure	NF			0.73		dB
Input Return Loss	S11			-6.8		dB
Output Return Loss	S22			-6.7		dB
Reverse Isolation	S12			-30.8		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1176.45MHz		-13.4		dBm
Input In-Band IP3	IIP3_inb	$f_1 = 1175.45\text{MHz}$, $f_2 = 1176.45\text{MHz}$, -30dBm		-5.9		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		2.0		µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		148		ns

ELECTRICAL CHARACTERISTICS (continued)

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0 = 1160MHz to 1300MHz, typical values are at V_{DD} = 2.8V, T_A = +25°C, f_0 = 1227.60MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0	None	1160	1227.60	1300	MHz
Power Gain	S21			18.0		dB
Noise Figure	NF			0.70		dB
Input Return Loss	S11			-7.1		dB
Output Return Loss	S22			-8.0		dB
Reverse Isolation	S12			-30.9		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1227.60MHz		-10.6		dBm
Input In-Band IP3	IIP3_inb	f_1 = 1226.60MHz, f_2 = 1227.60MHz, -30dBm		-5.1		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		1.7		µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		118		ns

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0 = 1160MHz to 1300MHz, typical values are at V_{DD} = 1.8V, T_A = +25°C, f_0 = 1227.60MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0	None	1160	1227.60	1300	MHz
Power Gain	S21			18.0		dB
Noise Figure	NF			0.70		dB
Input Return Loss	S11			-7.0		dB
Output Return Loss	S22			-8.6		dB
Reverse Isolation	S12			-30.5		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1227.60MHz		-12.8		dBm
Input In-Band IP3	IIP3_inb	f_1 = 1226.60MHz, f_2 = 1227.60MHz, -30dBm		-5.0		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		1.8		µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		140		ns

ELECTRICAL CHARACTERISTICS (continued)

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0' = 1550MHz to 1615MHz, typical values are at V_{DD} = 2.8V, T_A = +25°C, f_0' = 1575.42MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0'	None	1550	1575.42	1615	MHz
Power Gain	S21		15.8	17.4		dB
Noise Figure	NF			0.78		dB
Input Return Loss	S11			-9.3		dB
Output Return Loss	S22			-9.5		dB
Reverse Isolation	S12			-30.1		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1575.42MHz		-7.8		dBm
Input In-Band IP3	IIP3_inb	$f_1 = 1574.42\text{MHz}$, $f_2 = 1575.42\text{MHz}$, -30dBm		-1.6		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		1.6	3.3	µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		130	500	ns

(V_{DD} = 1.5V to 3.6V, T_A = -40°C to +85°C, f_0' = 1550MHz to 1615MHz, typical values are at V_{DD} = 1.8V, T_A = +25°C, f_0' = 1575.42MHz, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V_{DD}		1.5		3.6	V
Supply Current	I_{VDD}	EN = High		5.2	9.5	mA
	I_{SD}	EN = Low	0	0.01	1	µA
Control Voltage	V_{CTL_H}	High	1.35	1.8	V_{DD}	V
	V_{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f_0'	None	1550	1575.42	1615	MHz
Power Gain	S21		15.6	17.2		dB
Noise Figure	NF			0.79		dB
Input Return Loss	S11			-9.4		dB
Output Return Loss	S22			-9.6		dB
Reverse Isolation	S12			-29.9		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P_{1dB}	1575.42MHz		-10.1		dBm
Input In-Band IP3	IIP3_inb	$f_1 = 1574.42\text{MHz}$, $f_2 = 1575.42\text{MHz}$, -30dBm		-1.6		dBm
Turn-On Time	t_{ON}	Time from EN on to 90% of the gain		1.6	3.3	µs
Turn-Off Time	t_{OFF}	Time from EN off to 10% of the gain		149	500	ns

TYPICAL APPLICATION CIRCUIT

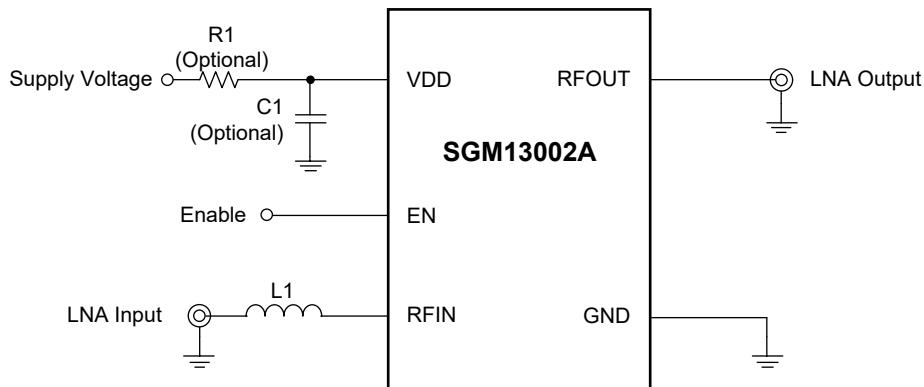


Figure 2. SGM13002A Typical Application Circuit

Table 1. SGM13002A Function Table

Component	Matching Band	Vendor	Type	Part Number & Value
L1	1160MHz to 1300MHz	Murata	Wired inductor, high Q	LQW15AN20N, 20nH
L1	1550MHz to 1615MHz	Murata	Wired inductor, high Q	LQW15AN10N, 10nH

EVALUATION BOARD LAYOUT

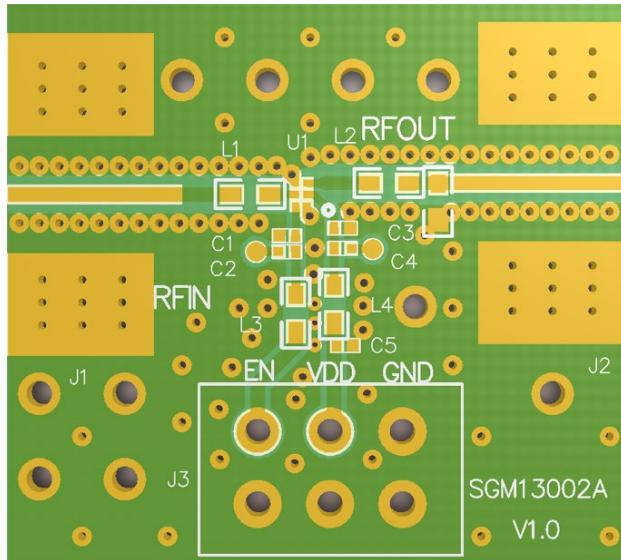


Figure 3. SGM13002A Evaluation Board Layout

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (MAY 2023) to REV.A





Page

Changed from product preview to production data.....All

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

UTDFN-1.1x0.7-6L

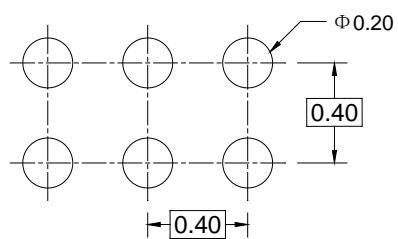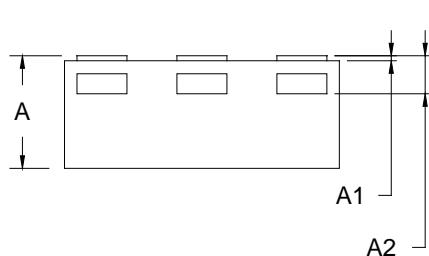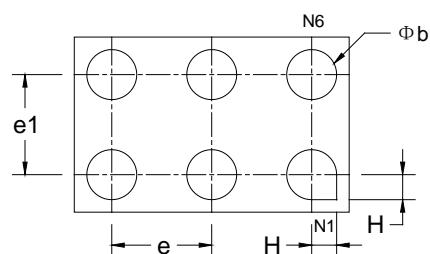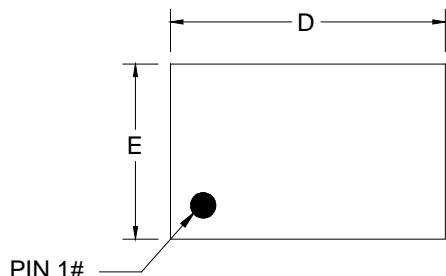


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.400	0.450	0.500
A1	0.000	0.020	0.050
A2	0.152 REF		
D	1.050	1.100	1.150
E	0.650	0.700	0.750
b	0.150	0.200	0.250
e	0.300	0.400	0.500
e1	0.300	0.400	0.500
H	0.100 REF		

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

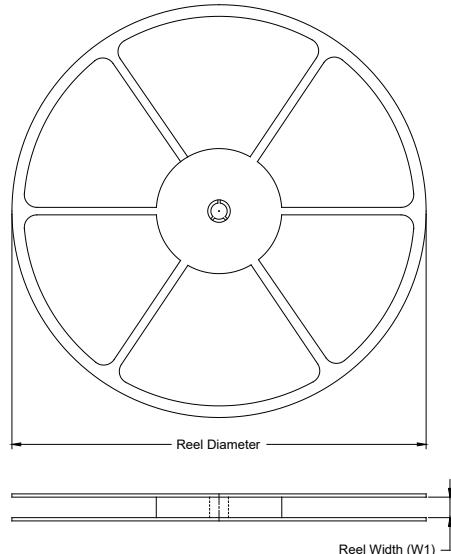

TAPE DIMENSIONS

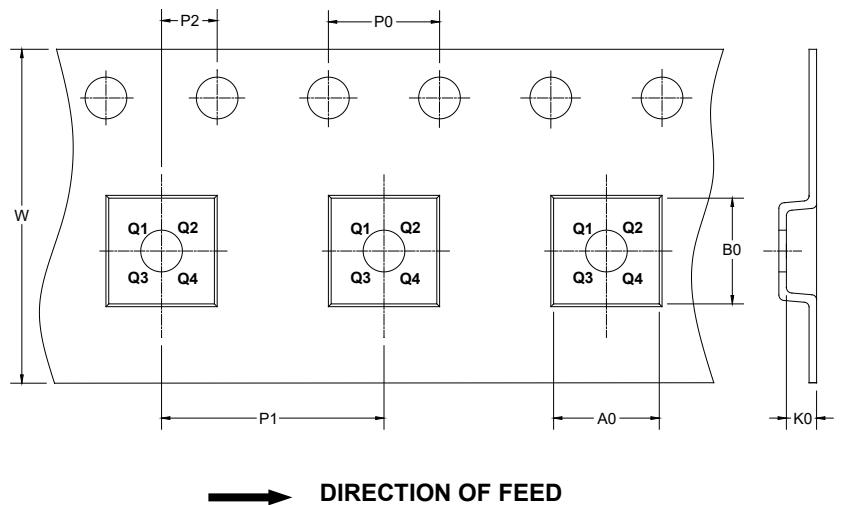

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1.1x0.7-6L	7"	9.5	0.80	1.20	0.55	4.0	2.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

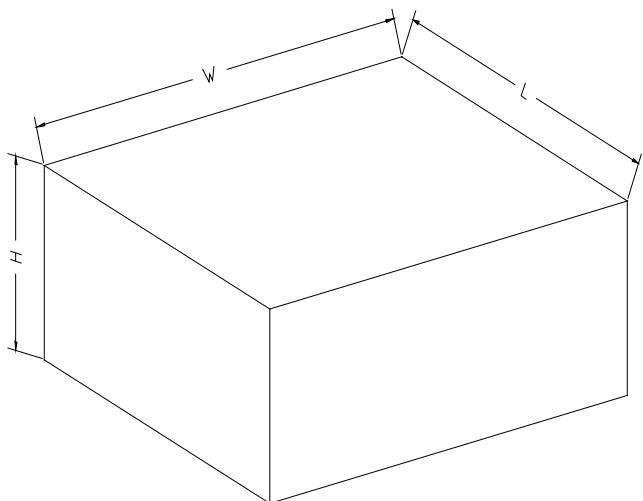

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

D0002